


## Ozubené remenice

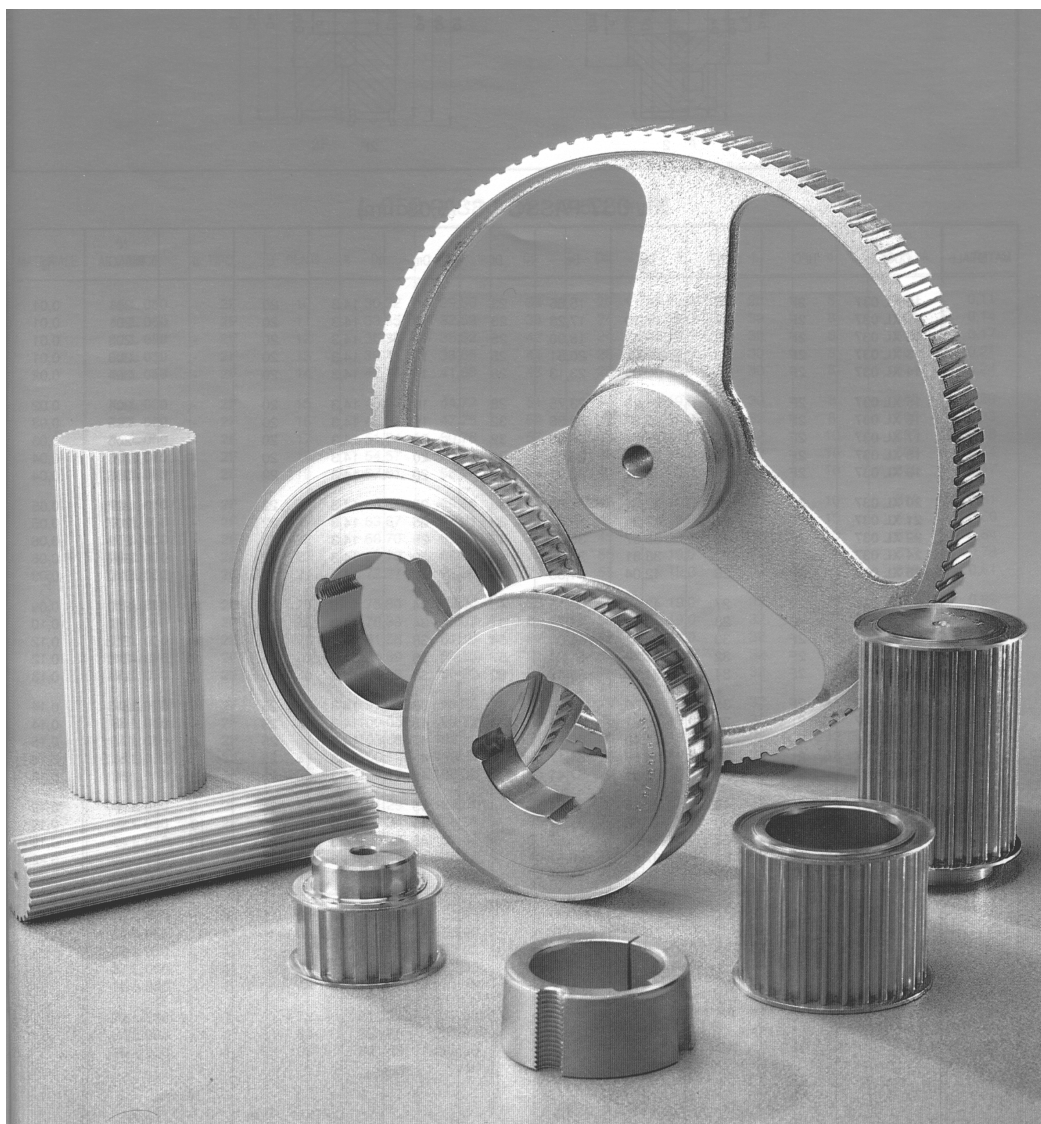


*Ulme*

# Ozubené remenice T 2.5


Rozteč 2.5 mm

DIN 7721


Hliník



Prevedenie 1F



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 6 mm



Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 21618	16 T 2.5/12	12	1F	9.55	9.00	13.0	9	16	12	-	-
T 21619	16 T 2.5/14	14	1F	11.14	10.60	15.0	9	16	14	-	-
T 21620	16 T 2.5/15	15	1F	11.94	11.40	15.0	9	16	15	-	-
T 27343	16 T 2.5/16	16	1F	12.73	12.20	16.0	9	16	16	-	-
T 21621	16 T 2.5/18	18	2F	14.32	13.80	18.0	10	16	10	3	-
T 21622	16 T 2.5/19	19	2F	15.12	14.60	18.0	10	16	10	3	-
T 21623	16 T 2.5/20	20	2F	15.92	15.40	19.5	10	16	11	3	-
T 41054	16 T 2.5/22	22	2F	17.51	17.00	23.0	10	16	11	3	-
T 21624	16 T 2.5/24	24	2F	19.10	18.55	23.0	10	16	12	3	0.01
T 21625	16 T 2.5/25	25	2F	19.90	19.35	23.0	10	16	13	3	0.01
T 41055	16 T 2.5/26	26	2F	20.70	20.15	25.0	10	16	14	4	0.01
T 27344	16 T 2.5/28	28	2F	22.28	21.75	25.0	10	16	14	4	0.02
T 21626	16 T 2.5/30	30	2F	23.87	23.35	28.0	10	16	16	6	0.02
T 21627	16 T 2.5/32	32	2F	25.47	24.95	32.0	10	16	16	6	0.02
T 21628	16 T 2.5/36	36	2F	28.65	28.10	36.0	10	16	20	6	0.03
T 21629	16 T 2.5/40	40	2F	31.83	31.30	38.0	10	16	22	6	0.03
T 41056	16 T 2.5/44	44	2	35.02	34.50	-	10	16	24	6	0.04
T 21630	16 T 2.5/48	48	2	38.20	37.70	-	10	16	26	6	0.05
T 21631	16 T 2.5/60	60	2	47.75	47.25	-	10	16	34	8	0.07

# Ozubené remenice T 5


Rozteč 5 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 10 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 21632	21 T 5/10	10	2F	15.92	15.05	19.5	15	21	8	-	0.01
T 21633	21 T 5/12	12	2F	19.01	18.25	23.0	15	21	10	-	0.01
T 21634	21 T 5/14	14	2F	22.29	21.45	25.0	15	21	13	-	0.02
T 21635	21 T 5/15	15	2F	23.88	23.05	28.0	15	21	16	-	0.02
T 21636	21 T 5/16	16	2F	25.47	24.60	32.0	15	21	18	-	0.03
T 21637	21 T 5/18	18	2F	28.65	27.80	32.0	15	21	20	-	0.03
T 21638	21 T 5/19	19	2F	30.25	29.40	36.0	15	21	22	-	0.04
T 21639	21 T 5/20	20	2F	31.83	31.00	36.0	15	21	23	-	0.04
T 41057	21 T 5/22	22	2F	35.12	34.25	38.0	15	21	24	-	0.05
T 21640	21 T 5/24	24	2F	38.21	37.40	42.0	15	21	26	-	0.06
T 21641	21 T 5/25	25	2F	39.80	38.95	44.0	15	21	26	-	0.06
T 41058	21 T 5/26	26	2F	41.47	40.60	44.0	15	21	26	-	0.06
T 21642	21 T 5/27	27	2F	42.98	42.20	48.0	15	21	30	8	0.07
T 41059	21 T 5/28	28	2F	44.62	43.75	48.0	15	21	32	8	0.07
T 21643	21 T 5/30	30	2F	47.76	46.95	51.0	15	21	34	8	0.07
T 21644	21 T 5/32	32	2F	50.94	50.10	54.0	15	21	38	8	0.09
T 21645	21 T 5/36	36	2F	57.31	56.45	63.0	15	21	38	8	0.11
T 21646	21 T 5/40	40	2F	63.66	62.85	66.0	15	21	40	8	0.14
T 41060	21 T 5/42	42	2F	66.87	66.00	71.0	15	21	40	8	0.18
T 41061	21 T 5/44	44	2	70.07	69.20	-	15	21	45	8	0.18
T 21647	21 T 5/48	48	2	76.42	75.55	-	15	21	50	8	0.20
T 21648	21 T 5/60	60	2	95.52	94.65	-	15	21	65	8	0.31

## Pre šírku reme a 16 mm



T 21649	27 T 5/10	10	2F	15.92	15.05	19.5	21	27	8	-	0.02
T 21650	27 T 5/12	12	2F	19.01	18.25	23.0	21	27	10	-	0.02
T 21651	27 T 5/14	14	2F	22.29	21.45	25.0	21	27	13	-	0.03
T 21652	27 T 5/15	15	2F	23.88	23.05	28.0	21	27	16	-	0.03
T 21653	27 T 5/16	16	2F	25.47	24.60	32.0	21	27	18	-	0.04
T 21654	27 T 5/18	18	2F	28.65	27.80	32.0	21	27	20	-	0.04
T 21655	27 T 5/19	19	2F	30.25	29.40	36.0	21	27	22	-	0.05
T 21656	27 T 5/20	20	2F	31.83	31.00	36.0	21	27	23	-	0.06
T 41062	27 T 5/22	22	2F	35.12	34.25	38.0	21	27	24	-	0.06
T 21657	27 T 5/24	24	2F	38.21	37.40	42.0	21	27	26	-	0.08
T 21658	27 T 5/25	25	2F	39.80	38.95	44.0	21	27	26	-	0.08
T 41063	27 T 5/26	26	2F	41.47	40.60	44.0	21	27	26	-	0.09

# Ozubené remenice T 5


Rozteč 5 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 16 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 21659	27 T 5/27	27	2F	42.98	42.20	48.0	21	27	30	8	0.09
T 41069	27 T 5/28	28	2F	44.62	43.75	48.0	21	27	32	8	0.09
T 21660	27 T 5/30	30	2F	47.76	46.95	51.0	21	27	34	8	0.10
T 21661	27 T 5/32	32	2F	50.94	50.10	54.0	21	27	38	8	0.12
T 21662	27 T 5/36	36	2F	57.31	56.45	63.0	21	27	38	8	0.16
T 21663	27 T 5/40	40	2F	63.66	62.85	66.0	21	27	40	8	0.19
T 41070	27 T 5/42	42	2F	66.87	66.00	71.0	21	27	40	8	0.20
T 41071	27 T 5/44	44	2	70.07	69.20	-	21	27	45	8	0.23
T 21664	27 T 5/48	48	2	76.42	75.55	-	21	27	50	8	0.28
T 21665	27 T 5/60	60	2	95.52	94.65	-	21	27	65	8	0.43

## Pre šírku reme a 25 mm

T 21666	36 T 5/10	10	2F	15.92	15.05	19.5	30	36	8	-	0.02
T 21667	36 T 5/12	12	2F	19.01	18.25	23.0	30	36	10	-	0.03
T 21668	36 T 5/14	14	2F	22.29	21.45	25.0	30	36	13	-	0.04
T 21669	36 T 5/15	15	2F	23.88	23.05	28.0	30	36	16	-	0.04
T 21670	36 T 5/16	16	2F	25.47	24.60	32.0	30	36	18	-	0.05
T 21671	36 T 5/18	18	2F	28.65	27.80	32.0	30	36	20	-	0.06
T 21672	36 T 5/19	19	2F	30.25	29.40	36.0	30	36	22	-	0.07
T 21673	36 T 5/20	20	2F	31.83	31.00	36.0	30	36	23	-	0.08
T 41072	36 T 5/22	22	2F	35.12	34.25	38.0	30	36	24	-	0.08
T 21674	36 T 5/24	24	2F	38.21	37.40	42.0	30	36	26	-	0.11
T 21675	36 T 5/25	25	2F	39.80	38.95	44.0	30	36	26	-	0.12
T 41073	36 T 5/26	26	2F	41.47	40.60	44.0	30	36	26	-	0.12
T 21676	36 T 5/27	27	2F	42.98	42.20	48.0	30	36	30	8	0.13
T 41074	36 T 5/28	28	2F	44.62	43.75	48.0	30	36	32	8	0.14
T 21677	36 T 5/30	30	2F	47.76	46.95	51.0	30	36	34	8	0.15
T 21678	36 T 5/32	32	2F	50.94	50.10	54.0	30	36	38	8	0.18
T 21679	36 T 5/36	36	2F	57.31	56.45	63.0	30	36	38	8	0.23
T 21680	36 T 5/40	40	2F	63.66	62.85	66.0	30	36	40	8	0.28
T 41075	36 T 5/42	42	2F	66.87	66.00	71.0	30	36	40	8	0.29
T 41076	36 T 5/44	44	2	70.07	69.20	-	30	36	45	8	0.31
T 21681	36 T 5/48	48	2	76.42	75.55	-	30	36	50	8	0.40
T 21682	36 T 5/60	60	2	95.52	94.65	-	30	36	65	8	0.61





# Ozubené remenice T 10


Rozteč 10 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 16 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Výpočto- vý Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 21683	31 T 10/12	12	2F	38.20	36.35	42	21	31	28	6	0.08
T 21684	31 T 10/14	14	2F	44.56	42.70	48	21	31	32	8	0.10
T 21685	31 T 10/15	15	2F	47.75	45.90	51	21	31	32	8	0.12
T 21686	31 T 10/16	16	2F	50.93	49.10	54	21	31	35	8	0.13
T 21687	31 T 10/18	18	2F	57.29	55.45	60	21	31	40	8	0.17
T 21688	31 T 10/19	19	2F	60.48	58.65	66	21	31	44	8	0.18
T 21689	31 T 10/20	20	2F	63.66	61.80	66	21	31	46	8	0.21
T 41077	31 T 10/22	22	2F	70.03	68.20	75	21	31	52	8	0.25
T 21690	31 T 10/24	24	2F	76.39	74.55	83	21	31	58	8	0.29
T 21691	31 T 10/25	25	2F	79.58	77.75	83	21	31	60	8	0.31
T 41078	31 T 10/26	26	2F	82.76	80.90	87	21	31	60	8	0.36
T 21692	31 T 10/27	27	2F	85.95	84.10	91	21	31	60	8	0.37
T 41079	31 T 10/28	28	2F	89.13	87.25	93	21	31	60	8	0.40
T 21693	31 T 10/30	30	2F	95.49	93.65	97	21	31	60	8	0.44
T 21694	31 T 10/32	32	2F	101.86	100.00	106	21	31	65	10	0.49
T 21695	31 T 10/36	36	2F	114.59	112.75	119	21	31	70	10	0.62
T 21696	31 T 10/40	40	2F	127.32	125.45	131	21	31	80	10	0.77
T 41080	31 T 10/44	44	2	140.06	138.20	-	21	31	88	10	1.00
T 21697	31 T 10/48	48	2	152.78	150.95	-	21	31	95	16	1.10
T 21698	31 T 10/60	60	2	190.98	189.15	-	21	31	110	16	1.70

## Pre šírku reme a 25 mm


T 21699	40 T 10/12	12	2F	38.20	36.35	42	30	40	28	6	0.10
T 21700	40 T 10/14	14	2F	44.56	42.70	48	30	40	32	8	0.13
T 21701	40 T 10/15	15	2F	47.75	45.90	51	30	40	32	8	0.15
T 21702	40 T 10/16	16	2F	50.93	49.10	54	30	40	35	8	0.18
T 21703	40 T 10/18	18	2F	57.29	55.45	60	30	40	40	8	0.22
T 21705	40 T 10/19	19	2F	60.48	58.65	66	30	40	44	8	0.25
T 21706	40 T 10/20	20	2F	63.66	61.80	66	30	40	46	8	0.28
T 41081	40 T 10/22	22	2F	70.03	68.20	75	30	40	52	8	0.34
T 21707	40 T 10/24	24	2F	76.39	74.55	83	30	40	58	8	0.39
T 21708	40 T 10/25	25	2F	79.58	77.75	83	30	40	60	8	0.42
T 41082	40 T 10/26	26	2F	82.76	80.90	87	30	40	60	8	0.48
T 21709	40 T 10/27	27	2F	85.95	84.10	91	30	40	60	8	0.54
T 41083	40 T 10/28	28	2F	89.13	87.25	93	30	40	60	8	0.55
T 21710	40 T 10/30	30	2F	95.49	93.65	97	30	40	60	8	0.64
T 21711	40 T 10/32	32	2F	101.86	100.00	106	30	40	65	10	0.69
T 21712	40 T 10/36	36	2F	114.59	112.75	119	30	40	70	10	0.87
T 21713	40 T 10/40	40	2F	127.32	125.45	131	30	40	80	10	1.07
T 41084	40 T 10/44	44	2	140.06	138.20	-	30	40	88	10	1.35
T 21714	40 T 10/48	48	2	152.78	150.95	-	30	40	95	16	1.52
T 21715	40 T 10/60	60	2	190.98	189.15	-	30	40	110	16	2.34

# Ozubené remenice T 10


Rozteč 10 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 32 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 41085	47 T 10/18	18	2F	57.29	55.45	60	37	47	40	10	0.25
T 41086	47 T 10/19	19	2F	60.48	58.65	66	37	47	44	10	0.29
T 41087	47 T 10/20	20	2F	63.66	61.80	66	37	47	46	12	0.32
T 41088	47 T 10/22	22	2F	70.03	68.20	75	37	47	52	12	0.39
T 41089	47 T 10/24	24	2F	76.39	74.55	83	37	47	58	12	0.47
T 41090	47 T 10/25	25	2F	79.58	77.75	83	37	47	60	12	0.53
T 41091	47 T 10/26	26	2F	82.76	80.90	87	37	47	60	12	0.56
T 41092	47 T 10/27	27	2F	85.95	84.10	91	37	47	60	12	0.60
T 41093	47 T 10/28	28	2F	89.13	87.25	93	37	47	60	12	0.64
T 41094	47 T 10/30	30	2F	95.49	93.65	97	37	47	60	12	0.74
T 41095	47 T 10/32	32	2F	101.86	100.00	106	37	47	65	12	0.84
T 41096	47 T 10/36	36	2F	114.59	112.75	119	37	47	70	16	1.06
T 41097	47 T 10/40	40	2F	127.32	125.45	131	37	47	80	16	1.32
T 41098	47 T 10/44	44	2	140.06	138.20	-	37	47	88	16	1.61
T 41099	47 T 10/48	48	2	152.78	150.95	-	37	47	95	16	1.93
T 41100	47 T 10/60	60	2	190.98	189.10	-	37	47	110	16	3.00

## Pre šírku reme a 50 mm


T 21716	66 T 10/18	18	2F	57.29	55.45	60	56	66	40	10	0.42
T 21717	66 T 10/19	19	2F	60.48	58.65	66	56	66	44	10	0.47
T 21718	66 T 10/20	20	2F	63.66	61.80	66	56	66	46	12	0.52
T 41101	66 T 10/22	22	2F	70.03	68.20	75	56	66	52	12	0.57
T 21719	66 T 10/24	24	2F	76.39	74.55	83	56	66	58	12	0.74
T 21720	66 T 10/25	25	2F	79.58	77.75	83	56	66	60	12	0.77
T 41102	66 T 10/26	26	2F	82.76	80.90	87	56	66	60	12	0.82
T 21721	66 T 10/27	27	2F	85.95	84.10	91	56	66	60	12	0.95
T 41103	66 T 10/28	28	2F	89.13	87.25	93	56	66	60	12	0.96
T 21722	66 T 10/30	30	2F	95.49	93.65	97	56	66	60	12	1.17
T 21723	66 T 10/32	32	2F	101.86	100.00	106	56	66	65	12	1.30
T 21724	66 T 10/36	36	2F	114.59	112.75	119	56	66	70	16	1.64
T 21725	66 T 10/40	40	2F	127.32	125.45	131	56	66	80	16	2.00
T 41104	66 T 10/44	44	2	140.06	138.20	-	56	66	88	16	2.36
T 21726	66 T 10/48	48	2	152.78	150.95	-	56	66	95	16	2.83
T 21727	66 T 10/60	60	2	190.98	189.10	-	56	66	110	16	4.37

# Ozubené remenice AT 5


Rozteč 5 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 10 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 34867	21 AT 5/12	12	2F	19.01	17.85	23	15	21	10	-	0.01
T 34869	21 AT 5/14	14	2F	22.29	21.05	25	15	21	13	-	0.02
T 34870	21 AT 5/15	15	2F	23.88	22.65	28	15	21	16	-	0.02
T 34872	21 AT 5/16	16	2F	25.47	24.20	32	15	21	18	-	0.03
T 34873	21 AT 5/18	18	2F	28.65	27.40	32	15	21	20	-	0.03
T 34874	21 AT 5/19	19	2F	30.25	29.00	36	15	21	22	-	0.04
T 34875	21 AT 5/20	20	2F	31.83	30.60	36	15	21	23	-	0.04
T 34877	21 AT 5/22	22	2F	35.12	33.85	38	15	21	24	-	0.05
T 34879	21 AT 5/24	24	2F	38.21	37.00	42	15	21	26	-	0.06
T 34881	21 AT 5/25	25	2F	39.80	38.55	44	15	21	26	-	0.06
T 34883	21 AT 5/26	26	2F	41.47	40.20	44	15	21	26	-	0.06
T 34884	21 AT 5/27	27	2F	42.98	41.80	48	15	21	30	8	0.07
T 34887	21 AT 5/28	28	2F	44.62	43.35	48	15	21	32	8	0.07
T 34888	21 AT 5/30	30	2F	47.76	46.55	51	15	21	34	8	0.07
T 34891	21 AT 5/32	32	2F	50.94	49.70	54	15	21	38	8	0.09
T 34892	21 AT 5/36	36	2F	57.31	56.05	63	15	21	38	8	0.11
T 34894	21 AT 5/40	40	2F	63.66	62.45	66	15	21	40	8	0.14
T 34895	21 AT 5/42	42	2F	66.87	65.60	71	15	21	40	8	0.18
T 34896	21 AT 5/44	44	2	70.07	68.80	-	15	21	45	8	0.18
T 34897	21 AT 5/48	48	2	76.42	75.15	-	15	21	50	8	0.20
T 34899	21 AT 5/60	60	2	95.52	94.25	-	15	21	65	8	0.31

## Pre šírku reme a 16 mm



T 34901	27 AT 5/12	12	2F	19.01	17.85	23	21	27	10	-	0.02
T 34902	27 AT 5/14	14	2F	22.29	21.05	25	21	27	13	-	0.03
T 34903	27 AT 5/15	15	2F	23.88	22.65	28	21	27	16	-	0.03
T 34904	27 AT 5/16	16	2F	25.47	24.20	32	21	27	18	-	0.04
T 34905	27 AT 5/18	18	2F	28.65	27.40	32	21	27	20	-	0.04
T 34907	27 AT 5/19	19	2F	30.25	29.00	36	21	27	22	-	0.05
T 34908	27 AT 5/20	20	2F	31.83	30.60	36	21	27	23	-	0.06
T 34911	27 AT 5/22	22	2F	35.12	33.85	38	21	27	24	-	0.06
T 34912	27 AT 5/24	24	2F	38.21	37.00	42	21	27	26	-	0.08
T 34914	27 AT 5/25	25	2F	39.80	38.55	44	21	27	26	-	0.08
T 34915	27 AT 5/26	26	2F	41.47	40.20	44	21	27	26	-	0.09
T 34916	27 AT 5/27	27	2F	42.98	41.80	48	21	27	30	8	0.09

# Ozubené remenice AT 5


Rozteč 5 mm

DIN 7721

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 16 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 34918	27 AT 5/28	28	2F	44.62	43.35	48	21	27	32	8	0.09
T 34920	27 AT 5/30	30	2F	47.76	46.55	51	21	27	34	8	0.10
T 34921	27 AT 5/32	32	2F	50.94	49.70	54	21	27	38	8	0.12
T 34922	27 AT 5/36	36	2F	57.31	56.05	63	21	27	38	8	0.16
T 34923	27 AT 5/40	40	2F	63.66	62.45	66	21	27	40	8	0.19
T 34924	27 AT 5/42	42	2F	66.87	65.60	71	21	27	40	8	0.20
T 34925	27 AT 5/44	44	2	70.07	68.80	-	21	27	45	8	0.23
T 34927	27 AT 5/48	48	2	76.42	75.15	-	21	27	50	8	0.28
T 34929	27 AT 5/60	60	2	95.52	94.25	-	21	27	65	8	0.43

## Pre šírku reme a 25 mm


T 36159	36 AT 5/12	12	2F	19.01	17.85	23	30	36	10	-	0.03
T 36160	36 AT 5/14	14	2F	22.29	21.05	25	30	36	13	-	0.04
T 36161	36 AT 5/15	15	2F	23.88	22.65	28	30	36	16	-	0.04
T 36162	36 AT 5/16	16	2F	25.47	24.20	32	30	36	18	-	0.05
T 36163	36 AT 5/18	18	2F	28.65	27.40	32	30	36	20	-	0.06
T 36164	36 AT 5/19	19	2F	30.25	29.00	36	30	36	22	-	0.07
T 36165	36 AT 5/20	20	2F	31.83	30.60	36	30	36	23	-	0.08
T 36166	36 AT 5/22	22	2F	35.12	33.85	38	30	36	24	-	0.08
T 36167	36 AT 5/24	24	2F	38.21	37.00	42	30	36	26	-	0.11
T 36168	36 AT 5/25	25	2F	39.80	38.55	44	30	36	26	-	0.12
T 36169	36 AT 5/26	26	2F	41.47	40.20	44	30	36	26	-	0.12
T 36170	36 AT 5/27	27	2F	42.98	41.80	48	30	36	30	8	0.13
T 36171	36 AT 5/28	28	2F	44.62	43.35	48	30	36	32	8	0.14
T 36172	36 AT 5/30	30	2F	47.76	46.55	51	30	36	34	8	0.15
T 36173	36 AT 5/32	32	2F	50.94	49.70	54	30	36	38	8	0.18
T 36174	36 AT 5/36	36	2F	57.31	56.05	63	30	36	38	8	0.23
T 36175	36 AT 5/40	40	2F	63.66	62.45	66	30	36	40	8	0.28
T 36176	36 AT 5/42	42	2F	66.87	65.60	71	30	36	40	8	0.29
T 36177	36 AT 5/44	44	2	70.07	68.80	-	30	36	45	8	0.31
T 36178	36 AT 5/48	48	2	76.42	75.15	-	30	36	50	8	0.40
T 36179	36 AT 5/60	60	2	95.52	94.25	-	30	36	65	8	0.61




# Ozubené remenice AT 10

Rozteč 10 mm

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 16 mm

Obj. číslo	Osna enie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 36180	31 AT 10/15	15	2F	47.75	45.90	51	21	31	32	8	0.12
T 36181	31 AT 10/16	16	2F	50.93	49.10	54	21	31	35	8	0.13
T 36182	31 AT 10/18	18	2F	57.29	55.45	60	21	31	40	8	0.17
T 36183	31 AT 10/19	19	2F	60.48	58.65	66	21	31	44	8	0.18
T 36184	31 AT 10/20	20	2F	63.66	61.80	66	21	31	46	8	0.21
T 36185	31 AT 10/22	22	2F	70.03	68.20	75	21	31	52	8	0.25
T 36186	31 AT 10/24	24	2F	76.39	74.55	83	21	31	58	8	0.29
T 36187	31 AT 10/25	25	2F	79.58	77.75	83	21	31	60	8	0.31
T 36188	31 AT 10/26	26	2F	82.76	80.90	87	21	31	60	8	0.36
T 36189	31 AT 10/27	27	2F	85.95	84.05	91	21	31	60	8	0.37
T 36190	31 AT 10/28	28	2F	89.13	87.25	93	21	31	60	8	0.40
T 36191	31 AT 10/30	30	2F	95.49	93.65	97	21	31	60	8	0.44
T 36193	31 AT 10/32	32	2F	101.86	100.00	106	21	31	65	10	0.49
T 36195	31 AT 10/36	36	2F	114.59	112.75	119	21	31	70	10	0.62
T 36196	31 AT 10/40	40	2F	127.32	125.45	131	21	31	80	10	0.77
T 36197	31 AT 10/44	44	2	140.06	138.20	-	21	31	88	10	1.00
T 36198	31 AT 10/48	48	2	152.78	150.95	-	21	31	95	16	1.10
T 36199	31 AT 10/60	60	2	190.98	189.15	-	21	31	110	16	1.70



## Pre šírku reme a 25 mm

T 36200	40 AT 10/15	15	2F	47.75	45.90	51	30	40	32	8	0.15
T 36202	40 AT 10/16	16	2F	50.93	49.10	54	30	40	35	8	0.18
T 36203	40 AT 10/18	18	2F	57.29	55.45	60	30	40	40	8	0.22
T 36204	40 AT 10/19	19	2F	60.48	58.65	66	30	40	44	8	0.25
T 36205	40 AT 10/20	20	2F	63.66	61.80	66	30	40	46	8	0.28
T 36206	40 AT 10/22	22	2F	70.03	68.20	75	30	40	52	8	0.34
T 36207	40 AT 10/24	24	2F	76.39	74.55	83	30	40	58	8	0.39
T 36208	40 AT 10/25	25	2F	79.58	77.75	83	30	40	60	8	0.42
T 36209	40 AT 10/26	26	2F	82.76	80.90	87	30	40	60	8	0.48
T 36210	40 AT 10/27	27	2F	85.95	84.05	91	30	40	60	8	0.54
T 36211	40 AT 10/28	28	2F	89.13	87.25	93	30	40	60	8	0.55
T 36213	40 AT 10/30	30	2F	95.49	93.65	97	30	40	60	8	0.64
T 36215	40 AT 10/32	32	2F	101.86	100.00	106	30	40	65	10	0.69
T 36217	40 AT 10/36	36	2F	114.59	112.75	119	30	40	70	10	0.87
T 36218	40 AT 10/40	40	2F	127.32	125.45	131	30	40	80	10	1.07
T 36219	40 AT 10/44	44	2	140.06	138.20	-	30	40	88	10	1.35
T 36220	40 AT 10/48	48	2	152.78	150.95	-	30	40	95	16	1.52
T 36221	40 AT 10/60	60	2	190.98	189.15	-	30	40	110	16	2.34


# Ozubené remenice AT 10

Rozteč 10 mm

Hliník



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 32 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 36222	47 AT 10/18	18	2F	57.29	55.45	60	37	47	40	10	0.25
T 36223	47 AT 10/19	19	2F	60.48	58.65	66	37	47	44	10	0.29
T 36224	47 AT 10/20	20	2F	63.66	61.80	66	37	47	46	12	0.32
T 36225	47 AT 10/22	22	2F	70.03	68.20	75	37	47	52	12	0.39
T 36226	47 AT 10/24	24	2F	76.39	74.55	83	37	47	58	12	0.47
T 36227	47 AT 10/25	25	2F	79.58	77.75	83	37	47	60	12	0.53
T 36228	47 AT 10/26	26	2F	82.76	80.90	87	37	47	60	12	0.56
T 36229	47 AT 10/27	27	2F	85.95	84.05	91	37	47	60	12	0.60
T 36230	47 AT 10/28	28	2F	89.13	87.25	93	37	47	60	12	0.64
T 36231	47 AT 10/30	30	2F	95.49	93.65	97	37	47	60	12	0.74
T 36232	47 AT 10/32	32	2F	101.86	100.00	106	37	47	65	12	0.84
T 36233	47 AT 10/36	36	2F	114.59	112.75	119	37	47	70	16	1.06
T 36234	47 AT 10/40	40	2F	127.32	125.45	131	37	47	80	16	1.32
T 36235	47 AT 10/44	44	2	140.06	138.20	-	37	47	88	16	1.61
T 36236	47 AT 10/48	48	2	152.78	150.95	-	37	47	95	16	1.93
T 36237	47 AT 10/60	60	2	190.98	189.15	-	37	47	110	16	3.00



## Pre šírku reme a 50 mm

T 36238	66 AT 10/18	18	2F	57.29	55.45	60	56	66	40	10	0.42
T 36239	66 AT 10/19	19	2F	60.48	58.65	66	56	66	44	10	0.47
T 36240	66 AT 10/20	20	2F	63.66	61.80	66	56	66	46	12	0.52
T 36241	66 AT 10/22	22	2F	70.03	68.20	75	56	66	52	12	0.57
T 36242	66 AT 10/24	24	2F	76.39	74.55	83	56	66	58	12	0.74
T 36243	66 AT 10/25	25	2F	79.58	77.75	83	56	66	60	12	0.77
T 36244	66 AT 10/26	26	2F	82.76	80.90	87	56	66	60	12	0.82
T 36245	66 AT 10/27	27	2F	85.95	84.05	91	56	66	60	12	0.95
T 36246	66 AT 10/28	28	2F	89.13	87.25	93	56	66	60	12	0.96
T 36247	66 AT 10/30	30	2F	95.49	93.65	97	56	66	60	12	1.17
T 36248	66 AT 10/32	32	2F	101.86	100.00	106	56	66	65	12	1.30
T 36249	66 AT 10/36	36	2F	114.59	112.75	119	56	66	70	16	1.64
T 36250	66 AT 10/40	40	2F	127.32	125.45	131	56	66	80	16	2.00
T 36251	66 AT 10/44	44	2	140.06	138.20	-	56	66	88	16	2.36
T 36252	66 AT 10/48	48	2	152.78	150.95	-	56	66	95	16	2.83
T 36253	66 AT 10/60	60	2	190.98	189.15	-	56	66	110	16	4.37


# Ozubené remenice XL

Rozteč 1/5" (5.08 mm)

Hliník



Prevedenie 2F



Prevedenie 2



Pre šírku reme a 037 (3/8" = 9.53 mm)

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 21728	10 XL 037	10	2F	16.17	15.66	23	14.3	20	10	-	0.01
T 21729	11 XL 037	11	2F	17.79	17.28	23	14.3	20	10	-	0.01
T 21730	12 XL 037	12	2F	19.40	18.90	25	14.3	20	10	-	0.01
T 65213	13 XL 037	13	2F	21.02	20.51	25	14.3	20	10	-	0.01
T 21731	14 XL 037	14	2F	22.64	23.13	28	14.3	20	16	-	0.02
T 21732	15 XL 037	15	2F	24.25	23.75	28	14.3	20	16	-	0.02
T 21733	16 XL 037	16	2F	25.87	25.36	32	14.3	20	16	-	0.03
T 65214	17 XL 037	17	2F	27.49	26.98	32	14.3	20	20	-	0.03
T 21734	18 XL 037	18	2F	29.11	28.60	36	14.3	20	20	-	0.04
T 65215	19 XL 037	19	2F	30.72	30.21	36	14.3	22	20	-	0.04
T 21735	20 XL 037	20	2F	32.34	31.83	38	14.3	22	25	-	0.05
T 21736	21 XL 037	21	2F	33.96	33.45	38	14.3	22	25	-	0.05
T 21737	22 XL 037	22	2F	35.57	35.07	42	14.3	22	25	-	0.06
T 21738	24 XL 037	24	2F	38.81	38.30	44	14.3	22	30	-	0.06
T 21739	26 XL 037	26	2F	42.04	41.53	48	14.3	22	30	8	0.09
T 65216	27 XL 037	27	2F	43.66	43.15	48	14.3	22	34	8	0.09
T 21740	28 XL 037	28	2F	45.28	44.77	51	14.3	22	34	8	0.10
T 21741	30 XL 037	30	2F	48.51	48.00	54	14.3	22	38	8	0.12
T 21742	32 XL 037	32	2F	51.74	51.24	57	14.3	25	38	8	0.12
T 65217	34 XL 037	34	2F	54.98	54.47	60	14.3	25	38	8	0.13
T 65218	35 XL 037	35	2F	56.60	56.09	63	14.3	25	38	8	0.14
T 21743	36 XL 037	36	2	58.21	57.70	-	14.3	25	45	8	0.14
T 65219	38 XL 037	38	2	61.45	60.94	-	14.3	25	45	8	0.15
T 21744	40 XL 037	40	2	64.68	64.17	-	14.3	25	45	8	0.16
T 21745	42 XL 037	42	2	67.91	67.41	-	14.3	25	45	8	0.18
T 21746	44 XL 037	44	2	71.15	70.64	-	14.3	25	45	8	0.19
T 21747	48 XL 037	48	2	77.62	77.11	-	14.3	25	45	10	0.19
T 65220	52 XL 037	52	2	84.08	83.57	-	14.3	25	45	10	0.19
T 21748	60 XL 037	60	2	97.02	96.51	-	14.3	25	45	10	0.22
T 41116	72 XL 037	72	2	116.42	115.92	-	14.3	25	45	10	0.26


# Ozubené remenice L

Rozteč 3/8" (9.525 mm)

vi .nižšie



Prevedenie 2F



Prevedenie 4

Pre šírku reme a 050 (1/2" = 12.7 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 21749	10 L 050	10	2F	St	30.32	29.56	36	19	28	20	8	0.11
T 21750	12 L 050	12	2F	St	36.38	35.62	42	19	30	24	8	0.17
T 21751	13 L 050	13	2F	St	39.41	38.65	44	19	30	28	8	0.21
T 21752	14 L 050	14	2F	St	42.44	41.68	48	19	30	28	8	0.24
T 41117	15 L 050	15	2F	St	45.48	44.72	51	19	30	34	8	0.29
T 21753	16 L 050	16	2F	St	48.51	47.75	54	19	32	36	8	0.33
T 21754	17 L 050	17	2F	St	51.54	50.78	57	19	32	36	10	0.38
T 21755	18 L 050	18	2F	St	54.57	53.81	60	19	32	40	10	0.44
T 21756	19 L 050	19	2F	St	57.61	56.84	63	19	32	40	10	0.47
T 21757	20 L 050	20	2F	St	60.64	59.88	66	19	32	40	10	0.51
T 21758	21 L 050	21	2F	St	63.67	62.91	71	19	32	45	10	0.60
T 21759	22 L 050	22	2F	St	66.70	65.94	75	19	32	45	10	0.64
T 65222	23 L 050	23	2F	St	69.73	68.97	79	19	32	55	10	0.78
T 21760	24 L 050	24	2F	St	72.77	72.00	79	19	32	55	10	0.81
T 65223	25 L 050	25	2F	St	75.80	75.04	83	19	32	58	10	0.89
T 21761	26 L 050	26	2F	St	78.83	78.07	87	19	32	58	12	0.94
T 65224	27 L 050	27	2F	St	81.86	81.10	87	19	32	58	12	0.99
T 21762	28 L 050	28	2F	St	84.89	84.13	91	19	32	58	12	1.04
T 21763	30 L 050	30	2F	St	90.96	90.20	97	19	32	70	12	1.17
T 21764	32 L 050	32	2F	St	97.03	96.26	103	19	32	70	12	1.41
T 65225	33 L 050	33	2F	St	100.05	99.29	106	19	32	70	12	1.49
T 65226	34 L 050	34	2F	St	103.08	102.32	111	19	32	70	12	1.57
T 65227	35 L 050	35	2F	St	106.12	105.35	111	19	32	70	12	1.62
T 21765	36 L 050	36	2F	St	109.15	108.39	115	19	32	70	12	1.70
T 21766	40 L 050	40	2F	St	121.29	120.51	127	19	32	70	12	2.03
T 65228	42 L 050	42	2F	St	127.34	126.58	135	19	32	70	12	2.21
T 21767	44 L 050	44	2F	St	133.40	132.64	140	19	32	70	12	2.38
T 65229	45 L 050	45	2F	St	136.44	135.67	143	19	32	70	12	2.48
T 21768	48 L 050	48	2F	St	145.53	144.77	152	19	32	70	12	2.78
T 65230	50 L 050	50	4	GG	151.60	150.83	-	19	32	70	14	-
T 65231	52 L 050	52	4	GG	157.66	156.90	-	19	32	70	14	-
T 65232	56 L 050	56	4	GG	169.79	169.02	-	19	32	70	14	-
T 65233	57 L 050	57	4	GG	172.82	172.06	-	19	32	70	14	-
T 21769	60 L 050	60	4	GG	181.91	181.15	-	19	42	75	14	-
T 41118	72 L 050	72	4	GG	218.29	217.53	-	19	42	75	14	-
T 41119	84 L 050	84	4	GG	254.68	253.92	-	19	42	75	14	-
T 41120	96 L 050	96	4	GG	291.06	290.30	-	19	42	75	14	-

**Info:**

St = Oce


GG = Šedá liatina




# Ozubené remenice L

Rozteč 3/8" (9.525 mm)

vi .nižšie



Prevedenie 2F



Prevedenie 4

Pre šírku reme a 075 (3/4" = 19.05 mm)

Obj. číslo	Oznaenie	enie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 41120	10 L 075	10	2F	St	30.32	29.56	36	25.4	38	20	8	0.14
T 21770	12 L 075	12	2F	St	36.38	35.62	42	25.4	38	24	8	0.22
T 21771	13 L 075	13	2F	St	39.41	38.65	44	25.4	38	28	8	0.26
T 21772	14 L 075	14	2F	St	42.44	41.68	48	25.4	38	28	8	0.30
T 41121	15 L 075	15	2F	St	45.48	44.72	51	25.4	38	34	8	0.37
T 21773	16 L 075	16	2F	St	48.51	47.75	54	25.4	38	36	8	0.43
T 21774	17 L 075	17	2F	St	51.54	50.78	57	25.4	38	36	10	0.46
T 21775	18 L 075	18	2F	St	54.57	53.81	60	25.4	38	40	10	0.54
T 21776	19 L 075	19	2F	St	57.61	56.84	63	25.4	38	40	10	0.58
T 21777	20 L 075	20	2F	St	60.64	59.88	66	25.4	38	40	10	0.64
T 21778	21 L 075	21	2F	St	63.67	62.91	71	25.4	38	45	10	0.71
T 21779	22 L 075	22	2F	St	66.70	65.94	75	25.4	38	45	10	0.79
T 65236	23 L 075	23	2F	St	69.73	68.97	79	25.4	38	55	10	0.94
T 21780	24 L 075	24	2F	St	72.77	72.00	79	25.4	38	55	10	1.00
T 65237	25 L 075	25	2F	St	75.80	75.04	83	25.4	38	58	10	1.10
T 21781	26 L 075	26	2F	St	78.83	78.07	87	25.4	38	58	12	1.16
T 65238	27 L 075	27	2F	St	81.86	81.10	87	25.4	38	58	12	1.22
T 21782	28 L 075	28	2F	St	84.89	84.13	91	25.4	38	58	12	1.30
T 21783	30 L 075	30	2F	St	90.96	90.20	97	25.4	38	70	12	1.47
T 21784	32 L 075	32	2F	St	97.03	96.26	103	25.4	38	70	12	1.75
T 65239	33 L 075	33	2F	St	100.05	99.29	106	25.4	38	70	12	1.85
T 65240	34 L 075	34	2F	St	103.08	102.32	111	25.4	38	70	12	1.93
T 65241	35 L 075	35	2F	St	106.12	105.35	111	25.4	38	70	12	2.03
T 21785	36 L 075	36	2F	St	109.15	108.39	115	25.4	38	70	12	2.14
T 21786	40 L 075	40	2F	St	121.29	120.51	127	25.4	38	70	12	2.56
T 65242	42 L 075	42	2F	St	127.34	126.58	135	25.4	38	70	12	2.81
T 21787	44 L 075	44	2F	St	133.40	132.64	140	25.4	38	70	12	3.02
T 65243	45 L 075	45	2F	St	136.44	135.67	143	25.4	38	70	12	3.16
T 21788	48 L 075	48	2F	St	145.53	144.77	152	25.4	38	70	12	3.57
T 65244	50 L 075	50	4	GG	151.60	150.83	-	25.4	38	70	14	-
T 65245	52 L 075	52	4	GG	157.66	156.90	-	25.4	38	70	14	-
T 65246	56 L 075	56	4	GG	169.79	169.02	-	25.4	38	70	14	-
T 65247	57 L 075	57	4	GG	172.82	172.06	-	25.4	38	70	14	-
T 21789	60 L 075	60	4	GG	181.91	181.15	-	25.4	45	75	14	-
T 41122	72 L 075	72	4	GG	218.29	217.53	-	25.4	45	75	14	-
T 41123	84 L 075	84	4	GG	254.68	253.92	-	25.4	45	75	14	-
T 65248	96 L 075	96	4	GG	291.06	290.30	-	25.4	45	75	14	-

**Info:**


St = Oce

GG = Šedá liatina


# Ozubené remenice L

Rozteč 3/8" (9.525 mm)

vi .nižšie



Prevedenie 2F



Prevedenie 4

Pre šírku reme a100 (1" = 25.4 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 41124	10 L 100	10	2F	St	30.32	29.56	36	31.8	45	20	8	0.17
T 41125	12 L 100	12	2F	St	36.38	35.62	42	31.8	45	24	8	0.26
T 21790	13 L 100	13	2F	St	39.41	38.65	44	31.8	45	28	8	0.32
T 21791	14 L 100	14	2F	St	42.44	41.68	48	31.8	45	28	10	0.35
T 41126	15 L 100	15	2F	St	45.48	44.72	51	31.8	45	34	10	0.43
T 21792	16 L 100	16	2F	St	48.51	47.75	54	31.8	45	36	10	0.50
T 21793	17 L 100	17	2F	St	51.54	50.78	57	31.8	45	36	10	0.56
T 21794	18 L 100	18	2F	St	54.57	53.81	60	31.8	45	40	10	0.64
T 21795	19 L 100	19	2F	St	57.61	56.84	63	31.8	45	40	10	0.70
T 21796	20 L 100	20	2F	St	60.64	59.88	66	31.8	45	40	10	0.77
T 21797	21 L 100	21	2F	St	63.67	62.91	71	31.8	45	45	10	0.88
T 21798	22 L 100	22	2F	St	66.70	65.94	75	31.8	45	45	12	0.95
T 65250	23 L 100	23	2F	St	69.73	68.97	79	31.8	45	55	12	1.11
T 21799	24 L 100	24	2F	St	72.77	72.00	79	31.8	45	55	12	1.18
T 65251	25 L 100	25	2F	St	75.80	75.04	83	31.8	45	58	12	1.30
T 21800	26 L 100	26	2F	St	78.83	78.07	87	31.8	45	58	12	1.40
T 65252	27 L 100	27	2F	St	81.86	81.10	87	31.8	45	58	12	1.47
T 21801	28 L 100	28	2F	St	84.89	84.13	91	31.8	45	58	12	1.58
T 21802	30 L 100	30	2F	St	90.96	90.20	97	31.8	45	70	12	1.78
T 21803	32 L 100	32	2F	St	97.03	96.26	103	31.8	45	70	12	2.11
T 65253	33 L 100	33	2F	St	100.05	99.29	106	31.8	45	70	12	2.23
T 65254	34 L 100	34	2F	St	103.08	102.32	111	31.8	45	70	12	2.39
T 65255	35 L 100	35	2F	St	106.12	105.35	111	31.8	45	70	12	2.45
T 21804	36 L 100	36	2F	St	109.15	108.39	115	31.8	45	70	12	2.59
T 21805	40 L 100	40	2F	St	121.29	120.51	127	31.8	45	70	12	3.13
T 65256	42 L 100	42	2F	St	127.34	126.58	135	31.8	45	70	12	3.43
T 21806	44 L 100	44	2F	St	133.40	132.64	140	31.8	45	70	12	3.72
T 65257	45 L 100	45	2F	St	136.44	135.67	143	31.8	45	70	12	3.89
T 21807	48 L 100	48	2F	St	145.53	144.77	152	31.8	45	70	12	4.38
T 65258	50 L 100	50	4	GG	151.60	150.83	-	31.8	45	70	14	-
T 65259	52 L 100	52	4	GG	157.66	156.90	-	31.8	45	70	14	-
T 65260	56 L 100	56	4	GG	169.79	169.02	-	31.8	45	70	14	-
T 65261	57 L 100	57	4	GG	172.82	172.06	-	31.8	45	70	14	-
T 21808	60 L 100	60	4	GG	181.91	181.15	-	31.8	45	75	14	-
T 41127	72 L 100	72	4	GG	218.29	217.53	-	31.8	45	75	14	-
T 41128	84 L 100	84	4	GG	254.68	253.92	-	31.8	45	75	14	-
T 65262	96 L 100	96	4	GG	291.06	290.30	-	31.8	45	75	14	-

**Info:**


St = Oce

GG = Šedá liatina


# Ozubené remenice H

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 2F



Prevedenie 4F



Prevedenie 4

Pre šírku reme a075 (3/4" = 19.05 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 41129	14 H 075	14	2F	St	56.59	55.22	63	26.4	40	40	11	0.58
T 41130	15 H 075	15	2F	St	60.64	59.27	66	26.4	40	45	11	0.69
T 41131	16 H 075	16	2F	St	64.68	63.31	71	26.4	40	45	11	0.77
T 41132	17 H 075	17	2F	St	68.72	67.35	75	26.4	40	45	11	0.84
T 41134	18 H 075	18	2F	St	72.77	71.39	79	26.4	40	55	11	1.01
T 41136	20 H 075	20	2F	St	80.85	79.48	87	26.4	40	62	11	1.27
T 41137	21 H 075	21	2F	St	84.89	83.52	91	26.4	40	65	11	1.41
T 41138	22 H 075	22	2F	St	88.94	87.56	93	26.4	40	68	11	1.55
T 41139	23 H 075	23	2F	St	92.98	91.61	97	26.4	40	72	11	1.71
T 41140	24 H 075	24	2F	St	97.03	95.65	103	26.4	40	72	11	1.83
T 41141	25 H 075	25	2F	St	101.06	99.69	106	26.4	40	72	11	1.96
T 41142	26 H 075	26	2F	St	105.11	103.73	111	26.4	40	80	11	2.19
T 41143	27 H 075	27	2F	St	109.15	107.78	115	26.4	40	80	11	2.32
T 41144	28 H 075	28	2F	St	113.19	111.82	119	26.4	40	80	11	2.47
T 41145	30 H 075	30	2F	St	121.29	119.90	127	26.4	40	80	11	2.76
T 41146	32 H 075	32	2F	St	129.36	127.99	135	26.4	40	80	11	3.08
T 41147	33 H 075	33	2F	St	133.40	132.03	140	26.4	40	80	11	3.25
T 41148	34 H 075	34	2F	St	137.45	136.07	143	26.4	40	80	11	3.42
T 41149	35 H 075	35	2F	St	141.49	140.12	148	26.4	40	80	11	3.61
T 41150	36 H 075	36	2F	St	145.53	144.16	152	26.4	40	80	11	3.79
T 41151	38 H 075	38	2F	St	153.62	152.24	158	26.4	40	80	11	4.16
T 41152	40 H 075	40	2F	St	161.70	160.33	168	26.4	40	80	11	4.58
T 41161	44 H 075	44	4F	GG	177.87	176.50	184	26.4	40	80	14	-
T 41162	48 H 075	48	4F	GG	194.04	192.67	200	26.4	45	90	14	-
T 41163	50 H 075	50	4	GG	202.13	200.75	-	26.4	45	90	14	-

Pre šírku reme a 100 (1" = 25.4 mm)

T 21809	14 H 100	14	2F	St	56.59	55.22	63	31.8	45	40	12	0.65
T 65263	15 H 100	15	2F	St	60.64	59.27	66	31.8	45	45	12	0.77
T 21810	16 H 100	16	2F	St	64.68	63.31	71	31.8	45	45	12	0.87
T 65264	17 H 100	17	2F	St	68.72	67.35	75	31.8	45	45	12	0.97
T 21811	18 H 100	18	2F	St	72.77	71.39	79	31.8	45	55	12	1.16
T 21812	19 H 100	19	2F	St	76.81	75.44	83	31.8	45	60	14	1.30
T 21813	20 H 100	20	2F	St	80.85	79.48	87	31.8	45	62	14	1.44
T 21814	21 H 100	21	2F	St	84.89	83.52	91	31.8	45	65	14	1.60
T 21815	22 H 100	22	2F	St	88.94	87.56	93	31.8	45	68	14	1.76
T 65265	23 H 100	23	2F	St	92.98	91.61	97	31.8	45	72	14	1.94
T 21816	24 H 100	24	2F	St	97.03	95.65	103	31.8	45	72	14	2.09

**Info:**


St = Oce

GG = Šedá liatina


# Ozubené remenice H

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 2F



Prevedenie 4F



Prevedenie 4

Pre šírku reme a 100 (1" = 25.4 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 65836	25 H 100	25	2F	St	101.06	99.69	106	31.8	45	72	14	2.24
T 21817	26 H 100	26	2F	St	105.11	103.73	111	31.8	45	80	14	2.49
T 65266	27 H 100	27	2F	St	109.15	107.78	115	31.8	45	80	14	2.66
T 21818	28 H 100	28	2F	St	113.19	111.82	119	31.8	45	80	14	2.83
T 21819	30 H 100	30	2F	St	121.29	119.90	127	31.8	45	80	14	3.19
T 21820	32 H 100	32	2F	St	129.36	127.99	135	31.8	45	80	14	3.57
T 65267	33 H 100	33	2F	St	133.40	132.03	140	31.8	45	80	14	3.79
T 65268	34 H 100	34	2F	St	137.45	136.07	143	31.8	45	80	14	3.99
T 65269	35 H 100	35	2F	St	141.49	140.12	148	31.8	45	80	14	4.20
T 21821	36 H 100	36	2F	St	145.53	144.16	152	31.8	45	80	14	4.44
T 65270	38 H 100	38	2F	St	153.62	152.24	158	31.8	45	80	14	4.90
T 21822	40 H 100	40	2F	St	161.70	160.33	168	31.8	45	80	14	5.39
T 21823	44 H 100	44	4F	GG	177.87	176.50	184	31.8	50	80	18	-
T 65271	45 H 100	45	4F	GG	181.91	180.54	192	31.8	50	80	18	-
T 21824	48 H 100	48	4F	GG	194.04	192.67	200	31.8	50	90	18	-
T 65272	50 H 100	50	4	GG	202.13	200.75	-	31.8	50	90	18	-
T 65273	52 H 100	52	4	GG	210.21	208.84	-	31.8	50	90	18	-
T 65274	58 H 100	58	4	GG	234.47	233.09	-	31.8	50	90	18	-
T 21825	60 H 100	60	4	GG	242.55	241.18	-	31.8	50	100	18	-
T 65275	70 H 100	70	4	GG	282.98	281.61	-	31.8	55	100	18	-
T 41174	72 H 100	72	4	GG	291.06	289.69	-	31.8	55	120	18	-
T 41175	84 H 100	84	4	GG	339.57	338.20	-	31.8	55	120	18	-
T 41176	96 H 100	96	4	GG	388.08	386.71	-	31.8	60	120	18	-
T 41177	120 H 100	120	4	GG	485.10	483.73	-	31.8	60	120	18	-

Pre šírku reme a 150 (1.5" = 38.1 mm)

T 21826	14 H 150	14	2F	St	56.59	55.22	63	46.0	58	40	18	0.81
T 65311	15 H 150	15	2F	St	60.64	59.27	66	46.0	58	45	18	0.97
T 21827	16 H 150	16	2F	St	64.68	63.31	71	46.0	58	45	18	1.11
T 65312	17 H 150	17	2F	St	68.72	67.35	75	46.0	58	45	18	1.25
T 21828	18 H 150	18	2F	St	72.77	71.39	79	46.0	58	55	18	1.48
T 21829	19 H 150	19	2F	St	76.81	75.44	83	46.0	58	60	18	1.68
T 21830	20 H 150	20	2F	St	80.85	79.48	87	46.0	58	62	18	1.88
T 21831	21 H 150	21	2F	St	84.89	83.52	91	46.0	58	65	18	2.08
T 21832	22 H 150	22	2F	St	88.94	87.56	93	46.0	58	68	18	2.30
T 65313	23 H 150	23	2F	St	92.98	91.61	97	46.0	58	72	18	2.54
T 21833	24 H 150	24	2F	St	97.03	95.65	103	46.0	58	72	18	2.75
T 65314	25 H 150	25	2F	St	101.06	99.69	106	46.0	58	72	18	2.97
T 21834	26 H 150	26	2F	St	105.11	103.73	111	46.0	58	80	18	3.29

**Info:**

St = Oce


GG = Šedá liatina




# Ozubené remenice H

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 2F



Prevedenie 4F



Prevedenie 4

Pre šírku reme a 150 (1.5" = 38.1 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 65315	27 H 150	27	2F	St	109.15	107.78	115	46.0	58	80	18	3.52
T 21835	28 H 150	28	2F	St	113.19	111.82	119	46.0	58	80	18	3.78
T 65316	29 H 150	29	2F	St	117.23	115.86	123	46.0	58	80	18	4.03
T 21836	30 H 150	30	2F	St	121.29	119.90	127	46.0	58	80	18	4.29
T 21837	32 H 150	32	2F	St	129.36	127.99	135	46.0	58	80	18	4.86
T 65317	33 H 150	33	2F	St	133.40	132.03	140	46.0	58	80	18	5.15
T 65318	34 H 150	34	2F	St	137.45	136.07	143	46.0	58	80	18	5.46
T 65319	35 H 150	35	2F	St	141.49	140.12	148	46.0	58	80	18	5.78
T 21838	36 H 150	36	2F	St	145.53	144.16	152	46.0	58	80	18	6.09
T 65320	38 H 150	38	2F	St	153.62	152.24	158	46.0	58	80	18	6.74
T 21839	40 H 150	40	2F	St	161.70	160.33	168	46.0	58	80	18	7.46
T 21840	44 H 150	44	4F	GG	177.87	176.50	184	46.0	58	80	18	-
T 65321	45 H 150	45	4F	GG	181.91	180.54	192	46.0	58	80	18	-
T 21841	48 H 150	48	4F	GG	194.04	192.67	200	46.0	65	90	18	-
T 65322	50 H 150	50	4	GG	202.13	200.75	-	46.0	65	90	18	-
T 65325	52 H 150	52	4	GG	210.21	208.84	-	46.0	65	90	18	-
T 65326	58 H 150	58	4	GG	234.47	233.09	-	46.0	65	90	18	-
T 21842	60 H 150	60	4	GG	242.55	241.18	-	46.0	65	100	18	-
T 65327	70 H 150	70	4	GG	282.98	281.61	-	46.0	65	100	24	-
T 41178	72 H 150	72	4	GG	291.06	289.69	-	46.0	65	120	24	-
T 41179	84 H 150	84	4	GG	339.57	338.20	-	46.0	65	120	24	-
T 41180	96 H 150	96	4	GG	388.08	386.71	-	46.0	65	120	24	-
T 41181	120 H 150	120	4	GG	485.10	483.73	-	46.0	65	120	24	-

Pre šírku reme a 200 (2" = 50.8 mm)

T 21843	14 H 200	14	2F	St	56.59	55.22	63	58.7	70	40	-	1.10
T 65328	15 H 200	15	2F	St	60.64	59.27	66	58.7	70	45	-	1.33
T 21844	16 H 200	16	2F	St	64.68	63.31	71	58.7	70	45	-	1.54
T 65329	17 H 200	17	2F	St	68.72	67.35	75	58.7	70	45	-	1.69
T 21845	18 H 200	18	2F	St	72.77	71.39	79	58.7	70	55	-	1.95
T 21846	19 H 200	19	2F	St	76.81	75.44	83	58.7	70	60	-	2.20
T 21847	20 H 200	20	2F	St	80.85	79.48	87	58.7	70	62	-	2.44
T 21848	21 H 200	21	2F	St	84.89	83.52	91	58.7	70	65	-	2.70
T 21849	22 H 200	22	2F	St	88.94	87.56	93	58.7	70	68	-	2.97
T 65330	23 H 200	23	2F	St	92.98	91.61	97	58.7	70	72	-	3.25
T 21850	24 H 200	24	2F	St	97.03	95.65	103	58.7	70	72	-	3.56
T 65331	25 H 200	25	2F	St	101.06	99.69	106	58.7	70	72	-	3.81
T 21851	26 H 200	26	2F	St	105.11	103.73	111	58.7	70	80	-	4.18
T 65332	27 H 200	27	2F	St	109.15	107.78	115	58.7	70	80	-	4.49

**Info:**


St = Oce

GG = Šedá liatina


# Ozubené remenice H

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 2F



Prevedenie 4F



Prevedenie 4

## Pre šírku reme a 200 (2" = 50.8 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 21852	28 H 200	28	2F	St	113.19	111.82	119	58.7	70	80	-	4.81
T 65333	29 H 200	29	2F	St	117.23	115.86	123	58.7	70	80	-	5.14
T 21853	30 H 200	30	2F	St	121.29	119.90	127	58.7	70	80	-	5.47
T 21854	32 H 200	32	2F	St	129.36	127.99	135	58.7	70	80	-	6.17
T 65334	33 H 200	33	2F	St	133.40	132.03	140	58.7	70	80	-	6.56
T 65335	34 H 200	34	2F	St	137.45	136.07	143	58.7	70	80	-	6.94
T 65336	35 H 200	35	2F	St	141.49	140.12	148	58.7	70	80	-	7.34
T 21855	36 H 200	36	2F	St	145.53	144.16	152	58.7	70	80	-	7.75
T 65337	38 H 200	38	2F	St	153.62	152.24	158	58.7	70	80	-	8.62
T 21856	40 H 200	40	2F	St	161.70	160.33	168	58.7	70	80	-	9.50
T 21857	44 H 200	44	4F	GG	177.87	176.50	184	58.7	70	80	18	-
T 65338	45 H 200	45	4F	GG	181.91	180.54	192	58.7	70	80	18	-
T 21858	48 H 200	48	4F	GG	194.04	192.67	200	58.7	75	90	24	-
T 65339	50 H 200	50	4	GG	202.13	200.75	-	58.7	75	90	24	-
T 65340	52 H 200	52	4	GG	210.21	208.84	-	58.7	75	90	24	-
T 65341	58 H 200	58	4	GG	234.47	233.09	-	58.7	75	90	24	-
T 21859	60 H 200	60	4	GG	242.55	241.18	-	58.7	75	100	24	-
T 65342	70 H 200	70	4	GG	282.98	281.61	-	58.7	75	100	28	-
T 41164	72 H 200	72	4	GG	291.06	289.69	-	58.7	75	120	28	-
T 41167	84 H 200	84	4	GG	339.57	338.20	-	58.7	75	120	28	-
T 41168	96 H 200	96	4	GG	388.08	386.71	-	58.7	75	120	28	-
T 41169	120 H 200	120	4	GG	485.10	483.73	-	58.7	75	120	28	-

## Pre šírku reme a 300 (3" = 76.2 mm)

T 21860	16 H 300	16	2F	St	64.68	63.31	71	85.7	100	45	-	2.16
T 65345	17 H 300	17	2F	St	68.72	67.35	75	85.7	100	45	-	2.43
T 21861	18 H 300	18	2F	St	72.77	71.39	79	85.7	100	55	-	2.80
T 21863	20 H 300	20	2F	St	80.85	79.48	87	85.7	100	62	-	3.50
T 21864	21 H 300	21	2F	St	84.89	83.52	91	85.7	100	65	-	3.87
T 21865	22 H 300	22	2F	St	88.94	87.56	93	85.7	100	68	-	4.26
T 65346	23 H 300	23	2F	St	92.98	91.61	97	85.7	100	72	-	4.68
T 21866	24 H 300	24	2F	St	97.03	95.65	103	85.7	100	72	-	5.08
T 65347	25 H 300	25	2F	St	101.06	99.69	106	85.7	100	72	-	5.45
T 21867	26 H 300	26	2F	St	105.11	103.73	111	85.7	100	80	-	6.01
T 65348	27 H 300	27	2F	St	109.15	107.78	115	85.7	100	80	-	6.45
T 21868	28 H 300	28	2F	St	113.19	111.82	119	85.7	100	80	-	6.91
T 21869	30 H 300	30	2F	St	121.29	119.90	127	85.7	100	80	-	7.90
T 21870	32 H 300	32	2F	St	129.36	127.99	135	85.7	100	80	-	8.92
T 65349	33 H 300	33	2F	St	133.40	132.03	140	85.7	100	80	-	9.46

### Info:



St = Oce

GG = Šedá liatina


# Ozubené remenice H

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 2F



Prevedenie 4F



Prevedenie 4

Pre šírku reme a 300 (3" = 76.2 mm)

Obj. číslo	Oznaenie zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg	
T 65350	34 H 300	34	2F	St	137.45	136.07	143	85.7	100	80	-	10.04
T 65351	35 H 300	35	2F	St	141.49	140.12	148	85.7	100	80	-	10.62
T 21871	36 H 300	36	2F	St	145.53	144.16	152	85.7	100	80	-	11.24
T 65352	38 H 300	38	2F	St	153.62	152.24	158	85.7	100	80	-	12.44
T 21872	40 H 300	40	2F	St	161.70	160.33	168	85.7	100	80	-	13.80
T 21873	44 H 300	44	4F	GG	177.87	176.50	184	85.7	100	80	24	-
T 21874	48 H 300	48	4F	GG	194.04	192.67	200	85.7	100	90	24	-
T 65353	50 H 300	50	4	GG	202.13	200.75	-	85.7	100	90	24	-
T 65354	58 H 300	58	4	GG	234.47	233.09	-	85.7	100	90	24	-
T 21875	60 H 300	60	4	GG	242.55	241.18	-	85.7	100	100	24	-
T 41170	72 H 300	72	4	GG	291.06	289.69	-	85.7	100	120	28	-
T 41171	84 H 300	84	4	GG	339.57	338.20	-	85.7	100	120	28	-
T 41172	96 H 300	96	4	GG	388.08	386.71	-	85.7	100	120	28	-
T 41173	120 H 300	120	4	GG	485.10	483.73	-	85.7	100	120	28	-

## Info:


St = Oce

GG = Šedá liatina

# Ozubené remenice XH

Rozteč 7/8" (22.225 mm)

Oce



Prevedenie 2F

## Pre šírku reme a 200 (2" = 50.8 mm)

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 41998	18 XH 200	18	2F	127.34	124.55	138	65	80	100	24	6.0
T 41999	19 XH 200	19	2F	134.41	131.62	146	65	80	100	24	6.6
T 42000	20 XH 200	20	2F	141.49	138.69	154	65	80	100	24	7.3
T 42001	21 XH 200	21	2F	148.56	145.77	160	65	80	110	24	8.0
T 42002	22 XH 200	22	2F	155.64	152.84	168	65	80	110	24	8.8
T 42003	24 XH 200	24	2F	169.79	166.99	183	65	80	120	24	10.6
T 42004	25 XH 200	25	2F	176.86	174.07	188	65	80	120	24	11.5
T 42005	26 XH 200	26	2F	183.93	181.14	198	65	80	120	24	12.3
T 42006	27 XH 200	27	2F	191.01	188.22	200	65	80	120	24	13.6
T 42007	28 XH 200	28	2F	198.09	195.29	211	65	80	120	24	14.5
T 42008	30 XH 200	30	2F	212.23	209.44	226	65	80	120	24	16.2
T 42009	32 XH 200	32	2F	226.38	223.59	240	65	80	120	24	17.8
T 42010	34 XH 200	34	2F	240.53	237.74	256	65	80	120	24	18.9

## Pre šírku reme a 300 (3" = 76.2 mm)

T 42019	18 XH 300	18	2F	127.34	124.55	138	92	110	100	28	8.9
T 42020	19 XH 300	19	2F	134.41	131.62	146	92	110	100	28	9.2
T 42021	20 XH 300	20	2F	141.49	138.69	154	92	110	100	28	9.5
T 42022	21 XH 300	21	2F	148.56	145.77	160	92	110	110	28	10.8
T 42023	22 XH 300	22	2F	155.64	152.84	168	92	110	110	28	12.3
T 42024	24 XH 300	24	2F	169.79	166.99	183	92	110	120	28	14.2
T 42025	25 XH 300	25	2F	176.86	174.07	188	92	110	120	28	15.5
T 42026	26 XH 300	26	2F	183.93	181.14	198	92	110	120	28	16.7
T 42027	27 XH 300	27	2F	191.01	188.22	200	92	110	120	28	18.5
T 42028	28 XH 300	28	2F	198.09	195.29	211	92	110	150	28	20.3
T 42029	30 XH 300	30	2F	212.23	209.44	226	92	110	150	28	23.9
T 42030	32 XH 300	32	2F	226.38	223.59	240	92	110	150	28	26.6
T 42031	34 XH 300	34	2F	240.53	237.74	256	92	110	150	28	31.5

## Pre šírku reme a 400 (4" = 101.6 mm)


T 42041	18 XH 400	18	2F	127.34	124.55	138	119	132	100	32	9.6
T 42042	19 XH 400	19	2F	134.41	131.62	146	119	132	100	32	10.8
T 42043	20 XH 400	20	2F	141.49	138.69	154	119	132	100	32	12.0
T 42044	21 XH 400	21	2F	148.56	145.77	160	119	132	110	32	13.3
T 42045	22 XH 400	22	2F	155.64	152.84	168	119	132	110	32	14.9
T 42046	24 XH 400	24	2F	169.79	166.99	183	119	132	120	32	17.9
T 42047	25 XH 400	25	2F	176.86	174.07	188	119	132	120	32	19.6
T 42048	26 XH 400	26	2F	183.93	181.14	198	119	132	120	32	21.2
T 42049	27 XH 400	27	2F	191.01	188.22	200	119	132	120	32	22.8
T 42050	28 XH 400	28	2F	198.09	195.29	211	119	132	150	32	24.7
T 42051	30 XH 400	30	2F	212.23	209.44	226	119	132	150	32	28.8
T 42052	32 XH 400	32	2F	226.38	223.59	240	119	132	150	32	32.7
T 42053	34 XH 400	34	2F	240.53	237.74	256	119	132	150	32	36.7




# Ozubené remenice L pre Taper Lock®

Rozteč 3/8" (9.525 mm)


vi .nižšie




Prevedenie 10F




Prevedenie 11F



Prevedenie 13



Prevedenie 14



Prevedenie 15F

## Pre šírku reme a 050 (1/2" = 12.7 mm)

Obj. číslo	Značení	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	R	kg
T 35324	TL 18 L 050	18	10F	St	1108	28	54.57	53.81	60.0	19	22	44	-	3.0	0.20
T 35327	TL 19 L 050	19	10F	St	1108	28	57.61	56.84	63.0	19	22	44	-	3.0	0.23
T 35332	TL 20 L 050	20	10F	St	1108	28	60.64	59.88	66.0	19	22	48	-	3.0	0.27
T 35333	TL 21 L 050	21	10F	St	1108	28	63.67	62.91	71.0	19	22	48	-	3.0	0.30
T 35334	TL 22 L 050	22	10F	St	1108	28	66.70	65.94	75.0	19	22	51	-	3.0	0.34
T 35335	TL 23 L 050	23	10F	St	1108	28	69.73	68.97	79.0	19	22	54	-	3.0	0.40
T 35336	TL 24 L 050	24	10F	St	1108	28	72.77	72.00	79.0	19	22	54	-	3.0	0.45
T 35337	TL 25 L 050	25	10F	St	1108	28	75.80	75.04	83.0	19	22	56	-	3.0	0.50
T 35338	TL 26 L 050	26	10F	St	1108	28	78.83	78.07	87.0	19	22	60	-	3.0	0.55
T 35339	TL 27 L 050	27	10F	St	1108	28	81.86	81.10	87.0	19	22	62	-	3.0	0.60
T 35340	TL 28 L 050	28	10F	St	1108	28	84.89	84.13	91.0	19	22	65	-	3.0	0.65
T 35341	TL 30 L 050	30	10F	St	1108	28	90.96	90.20	97.0	19	22	70	-	3.0	0.80
T 35342	TL 32 L 050	32	10F	St	1108	28	97.02	96.26	103.0	19	22	74	-	3.0	0.98
T 35343	TL 36 L 050	36	10F	St	1108	28	109.15	108.39	115.0	19	22	85	-	3.0	1.20
T 35344	TL 40 L 050	40	10F	St	1610	42	121.28	120.51	127.0	19	25	97	-	6.0	1.40
T 35347	TL 48 L 050	48	11F	St	1610	42	145.53	144.77	152.0	19	25	88	120	6.0	2.30
T 35350	TL 60 L 050	60	13	St	1610	42	181.91	181.15	-	19	25	92	166	3.0	2.20
T 35352	TL 72 L 050	72	14	GG	1610	42	218.30	217.53	-	19	25	92	202	3.0	-
T 35353	TL 84 L 050	84	14	GG	1610	42	254.68	253.90	-	19	25	92	236	3.0	-
T 35354	TL 96 L 050	96	14	GG	2012	50	291.06	290.30	-	19	32	106	270	6.5	-
T 35355	TL 120 L 050	120	14	GG	2012	50	363.83	363.07	-	19	32	106	343	6.5	-


## Pre šírku reme a 075 (3/4" = 19.05 mm)

T 35377	TL 18 L 075	18	15F	St	1108	28	54.57	53.81	60.0	25	25	-	-	-	0.25
T 35378	TL 19 L 075	19	15F	St	1108	28	57.61	56.84	63.0	25	25	-	-	-	0.32
T 35379	TL 20 L 075	20	15F	St	1108	28	60.64	59.88	66.0	25	25	-	-	-	0.35
T 35380	TL 21 L 075	21	15F	St	1108	28	63.67	62.91	71.0	25	25	-	-	-	0.40
T 35381	TL 22 L 075	22	15F	St	1108	28	66.70	65.94	75.0	25	25	-	-	-	0.44
T 35382	TL 23 L 075	23	15F	St	1108	28	69.73	68.97	79.0	25	25	-	-	-	0.48
T 35383	TL 24 L 075	24	15F	St	1108	28	72.77	72.00	79.0	25	25	-	-	-	0.55
T 35384	TL 25 L 075	25	15F	St	1108	28	75.80	75.04	83.0	25	25	-	-	-	0.63
T 35385	TL 26 L 075	26	15F	St	1108	28	78.83	78.07	87.0	25	25	-	-	-	0.66
T 35386	TL 27 L 075	27	15F	St	1108	28	81.86	81.10	87.0	25	25	-	-	-	0.70
T 35387	TL 28 L 075	28	15F	St	1108	28	84.89	84.13	91.0	25	25	-	-	-	0.72
T 35388	TL 30 L 075	30	15F	St	1108	28	90.96	90.20	97.0	25	25	-	-	-	0.93


# Ozubené remenice L pre Taper Lock®

Rozteč 3/8" (9.525 mm)


vi .nižšie




Prevedenie 15F




Prevedenie 21



Prevedenie 21F



Prevedenie 19



Prevedenie 22

## Pre šírku reme a 075 (3/4" = 19.05 mm)

Obj. číslo	Značení	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	R	kg
T 35389	TL 32 L 075	32	15F	St	1108	28	97.02	96.26	103.0	25	25	-	-	-	1.10
T 35390	TL 36 L 075	36	15F	St	1610	42	109.15	108.39	115.0	25	25	-	-	-	1.20
T 35391	TL 40 L 075	40	15F	St	1610	42	121.28	120.51	127.0	25	25	-	-	-	1.70
T 35392	TL 48 L 075	48	21F	St	1610	42	145.53	144.77	152.0	25	25	92	120	-	2.60
T 35393	TL 60 L 075	60	21	St	1610	42	181.91	181.15	-	25	25	92	166	-	3.00
T 35394	TL 72 L 075	72	22	GG	1610	42	218.30	217.53	-	25	25	92	202	-	-
T 35395	TL 84 L 075	84	14	GG	2012	50	254.68	253.90	-	25	32	106	236	3.5	-
T 35396	TL 96 L 075	96	14	GG	2012	50	291.06	290.30	-	25	32	106	270	3.5	-
T 35397	TL 120 L 075	120	14	GG	2012	50	363.83	363.07	-	25	32	106	343	3.5	-

## Pre šírku reme a 100 (1" = 25.4 mm)

T 35356	TL 18 L 100	18	16F	St	1108	28	54.57	53.81	60.0	31	22	-	38	9.0	0.20
T 35357	TL 19 L 100	19	16F	St	1108	28	57.61	56.84	63.0	31	22	-	38	9.0	0.32
T 35358	TL 20 L 100	20	16F	St	1108	28	60.64	59.88	66.0	31	22	-	45	9.0	0.41
T 35359	TL 21 L 100	21	16F	St	1108	28	63.67	62.91	71.0	31	22	-	45	9.0	0.45
T 35360	TL 22 L 100	22	16F	St	1108	28	66.70	65.94	75.0	31	22	-	48	9.0	0.47
T 35361	TL 23 L 100	23	16F	St	1108	28	69.73	68.97	79.0	32	22	-	52	10.0	0.50
T 35362	TL 24 L 100	24	16F	St	1108	28	72.77	72.00	79.0	32	22	-	52	10.0	0.64
T 35363	TL 25 L 100	25	16F	St	1108	28	75.80	75.04	83.0	32	22	-	54	10.0	0.68
T 35364	TL 26 L 100	26	16F	St	1108	28	78.83	78.07	87.0	32	22	-	60	10.0	0.70
T 35365	TL 27 L 100	27	16F	St	1108	28	81.86	81.10	87.0	32	22	-	60	10.0	0.83
T 35366	TL 28 L 100	28	16F	St	1108	28	84.89	84.13	91.0	32	22	-	65	10.0	0.85
T 35367	TL 30 L 100	30	16F	St	1210	32	90.96	90.20	97.0	32	25	-	71	7.0	0.90
T 35368	TL 32 L 100	32	16F	St	1210	35	97.02	96.26	103.0	32	25	-	75	7.0	1.05
T 35369	TL 36 L 100	36	16F	St	1610	42	109.15	108.39	115.0	32	25	-	86	7.0	1.40
T 35370	TL 40 L 100	40	16F	St	1610	42	121.28	120.51	127.0	32	25	-	96	7.0	1.65
T 35371	TL 48 L 100	48	17F	St	1610	42	145.53	144.77	152.0	32	25	92	120	7.0	2.80
T 35372	TL 60 L 100	60	19	St	1610	42	181.91	181.15	-	32	25	92	166	3.5	2.70
T 35373	TL 72 L 100	72	22	GG	2012	50	218.30	217.53	-	32	32	106	202	-	-
T 35374	TL 84 L 100	84	22	GG	2012	50	254.68	253.90	-	32	32	106	236	-	-
T 35375	TL 96 L 100	96	22	GG	2012	50	291.06	290.30	-	32	32	106	270	-	-
T 35376	TL 120 L 100	120	22	GG	2012	50	363.83	363.07	-	32	32	106	343	-	-

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice H pre Taper Lock®

Rozteč 1/2" (12.7 mm)


vi .nižšie




Prevedenie 16F




Prevedenie 17F



Prevedenie 21F



Prevedenie 20



Prevedenie 14

## Pre šírku reme a 100 (1" = 25.4 mm)

Obj. číslo	Značení	Preve- zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	R	kg
T 35089	TL 16 H100	16	16F	St	1108	28	64.68	63.31	71.0	31	22	-	45.0	9.0	0.42
T 35090	TL 18 H100	18	16F	St	1210	32	72.77	71.39	79.0	31	25	-	52.0	6.0	0.49
T 35091	TL 19 H100	19	16F	St	1210	32	76.81	75.44	83.0	31	25	-	56.0	6.0	0.62
T 35092	TL 20 H100	20	16F	St	1210	32	80.85	79.48	87.0	31	25	-	60.0	6.0	0.73
T 35093	TL 21 H100	21	16F	St	1210	32	84.89	83.52	91.0	32	25	-	64.0	7.0	0.80
T 35096	TL 22 H100	22	16F	St	1210	32	88.94	87.56	93.0	32	25	-	67.0	7.0	0.94
T 35100	TL 23 H100	23	16F	St	1610	42	92.98	91.61	97.0	32	25	-	70.0	7.0	0.97
T 35103	TL 24 H100	24	16F	St	1610	42	97.02	95.65	103.0	32	25	-	73.5	7.0	1.05
T 35104	TL 25 H100	25	16F	St	1610	42	101.06	99.69	106.0	32	25	-	77.0	7.0	1.10
T 35105	TL 26 H100	26	16F	St	1610	42	105.11	103.73	111.0	32	25	-	82.0	7.0	1.20
T 35106	TL 27 H100	27	16F	St	1610	42	109.15	107.78	115.0	32	25	-	85.0	7.0	1.35
T 35107	TL 28 H100	28	16F	St	1610	42	113.19	111.82	119.0	32	25	-	90.5	7.0	1.50
T 35108	TL 30 H100	30	16F	St	1610	42	121.28	119.90	127.0	32	25	-	98.0	7.0	1.78
T 35109	TL 32 H100	32	17F	St	1610	42	129.36	127.99	135.0	32	25	90	106.0	7.0	2.05
T 35110	TL 36 H100	36	17F	St	1610	42	145.53	144.16	152.0	32	25	92	121.0	7.0	2.80
T 35111	TL 40 H100	40	17F	St	1610	42	161.70	160.33	168.0	32	25	92	138.0	7.0	3.65
T 35112	TL 44 H100	44	21F	St	2012	50	177.87	176.50	184.0	32	32	106	152.0	-	3.86
T 35113	TL 48 H100	48	21F	St	2012	50	194.04	192.67	200.0	32	32	106	169.0	-	4.20
T 35114	TL 60 H100	60	20	GG	2012	50	242.55	241.18	-	34	32	106	223.0	1.0	-
T 35115	TL 72 H100	72	20	GG	2012	50	291.06	289.69	-	34	32	106	270.0	1.0	-
T 35116	TL 84 H100	84	20	GG	2012	50	339.57	338.20	-	34	32	106	318.0	1.0	-
T 35117	TL 96 H100	96	14	GG	2517	60	388.08	386.71	-	34	45	119	366.0	5.5	-
T 35118	TL 120 H100	120	14	GG	2517	60	485.10	483.73	-	34	45	119	462.0	5.5	-

## Pre šírku reme a 150 (1.5" = 38.1 mm)

T 35143	TL 18 H150	18	16F	St	1210	32	72.77	71.39	79.0	45	25	-	52.0	20.0	0.60
T 35144	TL 19 H150	19	16F	St	1210	32	76.81	74.44	83.0	45	25	-	56.0	20.0	0.72
T 35145	TL 20 H150	20	16F	St	1210	32	80.85	79.48	87.0	45	25	-	60.0	20.0	0.83
T 35146	TL 21 H150	21	16F	St	1210	32	84.89	83.52	91.0	45	25	-	64.0	20.0	1.00
T 35149	TL 22 H150	22	16F	St	1210	32	88.94	87.56	93.0	45	25	-	67.0	20.0	1.25
T 35152	TL 23 H150	23	16F	St	1610	42	92.98	91.61	97.0	45	25	-	70.0	20.0	1.05
T 35153	TL 24 H150	24	16F	St	1610	42	97.02	95.65	103.0	45	25	-	73.5	20.0	1.10
T 35156	TL 25 H150	25	16F	St	1610	42	101.06	99.69	106.0	45	25	-	77.0	20.0	1.30
T 35158	TL 26 H150	26	16F	St	1610	42	105.11	103.73	111.0	45	25	-	82.0	20.0	1.42
T 35159	TL 27 H150	27	16F	St	1610	42	109.15	107.78	115.0	45	25	-	85.0	20.0	1.65
T 35162	TL 28 H150	28	16F	St	1610	42	113.19	111.82	119.0	45	25	-	90.5	20.0	1.88
T 35163	TL 30 H150	30	16F	St	1610	42	121.28	119.90	127.0	45	25	-	98.0	20.0	2.05

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice H pre Taper Lock®

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 16F



Prevedenie 17F



Prevedenie 20

## Pre šírku reme a 150 (1.5" = 38.1 mm)

Obj. číslo	Značení	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø Ds	Ø Df	F	L	Dm	Di	R	kg
T 35166	TL 32 H150	32	17F	St	1610	42	129.36	127.99	135.0	45	25	90	106.0	20.0	2.35
T 35171	TL 36 H150	36	17F	St	1610	42	145.53	144.16	152.0	45	25	92	121.0	20.0	3.20
T 35173	TL 40 H150	40	17F	St	1610	42	161.70	160.33	168.0	45	25	92	138.0	20.0	4.10
T 35177	TL 44 H150	44	17F	St	2012	50	177.87	176.50	184.0	45	32	106	152.0	13.0	4.50
T 35180	TL 48 H150	48	17F	St	2012	50	194.04	192.67	200.0	45	32	106	169.0	13.0	4.80
T 35182	TL 60 H150	60	20	GG	2012	50	242.55	241.18	-	46	32	106	223.0	7.0	-
T 35184	TL 72 H150	72	20	GG	2012	50	291.06	289.69	-	46	32	106	270.0	7.0	-
T 35187	TL 84 H150	84	20	GG	2012	50	339.57	338.20	-	46	32	106	320.0	7.0	-
T 35190	TL 96 H150	96	20	GG	2517	60	388.08	386.71	-	46	45	119	366.0	0.5	-
T 35192	TL 120 H150	120	20	GG	2517	60	485.10	483.73	-	46	45	119	462.0	0.5	-

## Pre šírku reme a 200 (2" = 50.8 mm)

T 41190	TL 18 H200	18	16F	St	1210	32	72.77	71.39	79.0	58	25	-	52.0	33.0	-
T 41191	TL 19 H200	19	16F	St	1210	32	76.81	74.44	83.0	58	25	-	56.0	33.0	-
T 41192	TL 20 H200	20	16F	St	1610	42	80.85	79.48	87.0	58	25	-	60.0	33.0	-
T 35123	TL 21 H200	21	16F	St	1610	42	84.89	83.52	91.0	58	25	-	64.0	33.0	-
T 35124	TL 22 H200	22	16F	St	1610	42	88.94	87.56	93.0	58	25	-	67.0	33.0	-
T 35125	TL 23 H200	23	16F	St	1610	42	92.98	91.61	97.0	58	25	-	70.0	33.0	-
T 35126	TL 24 H200	24	16F	St	1610	42	97.02	95.65	103.0	58	25	-	73.5	33.0	-
T 35127	TL 25 H200	25	16F	St	1610	42	101.06	99.69	106.0	58	25	-	77.0	33.0	-
T 35128	TL 26 H200	26	16F	St	1610	42	105.11	103.73	111.0	58	25	-	82.0	33.0	-
T 35129	TL 27 H200	27	16F	St	1610	42	109.15	107.78	115.0	58	25	-	85.0	33.0	-
T 35130	TL 28 H200	28	16F	St	1610	42	113.19	111.82	119.0	58	25	-	90.5	33.0	-
T 35131	TL 30 H200	30	16F	St	1610	42	121.28	119.90	127.0	58	25	-	98.0	33.0	-
T 35132	TL 32 H200	32	16F	St	2012	50	129.36	127.99	135.0	58	32	-	106.0	26.0	-
T 35133	TL 36 H200	36	17F	St	2012	50	145.53	144.16	152.0	58	32	102	121.0	26.0	-
T 35134	TL 40 H200	40	17F	St	2012	50	161.70	160.33	168.0	58	32	106	138.0	26.0	-
T 35135	TL 44 H200	44	17F	St	2012	50	177.87	176.50	184.0	58	32	106	152.0	26.0	-
T 35136	TL 48 H200	48	17F	St	2517	60	194.04	192.67	200.0	58	45	119	169.0	13.0	-
T 35137	TL 60 H200	60	20	GG	2517	60	242.55	241.18	-	60	45	119	223.0	7.5	-
T 35138	TL 72 H200	72	20	GG	2517	60	291.06	289.69	-	60	45	119	270.0	7.5	-
T 35139	TL 84 H200	84	20	GG	2517	60	339.57	338.20	-	60	45	119	320.0	7.5	-
T 35140	TL 96 H200	96	20	GG	2517	60	388.08	386.71	-	60	45	119	366.0	7.5	-
T 35141	TL 120 H200	120	20	GG	2517	60	485.10	483.73	-	60	45	119	462.0	7.5	-

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice H pre Taper Lock®

Rozteč 1/2" (12.7 mm)


vi .nižšie



Prevedenie 18F



Prevedenie 19F



Prevedenie 20

Pre šírku reme a 300 (3" = 76.2 mm)

Obj. číslo	Značení	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	R	kg
T 41193	TL 20 H300	20	18F	St	1615	42	80.85	79.48	87.0	84	38	-	64.5	23.0	-
T 35197	TL 21 H300	21	18F	St	1615	42	84.89	83.52	91.0	84	38	-	65.0	23.0	-
T 35198	TL 22 H300	22	18F	St	1615	42	88.94	87.56	93.0	84	38	-	67.0	23.0	-
T 35199	TL 23 H300	23	18F	St	1615	42	92.98	91.61	97.0	84	38	-	70.0	23.0	-
T 35200	TL 24 H300	24	18F	St	1615	42	97.02	95.65	103.0	84	38	-	73.5	23.0	-
T 35201	TL 25 H300	25	18F	St	1615	42	101.06	99.69	106.0	84	38	-	77.0	23.0	-
T 35202	TL 26 H300	26	18F	St	1615	42	105.11	103.73	111.0	84	38	-	82.0	23.0	-
T 35203	TL 27 H300	27	18F	St	2012	50	109.15	107.78	115.0	84	32	-	85.0	26.0	-
T 35204	TL 28 H300	28	18F	St	2012	50	113.19	111.82	119.0	84	32	-	90.5	26.0	-
T 35205	TL 30 H300	30	18F	St	2012	50	121.28	119.90	127.0	84	32	-	98.0	26.0	-
T 35206	TL 32 H300	32	18F	St	2517	60	129.36	127.99	135.0	84	45	-	106.0	19.5	-
T 35207	TL 36 H300	36	18F	St	2517	60	145.53	144.16	152.0	84	45	-	121.0	19.5	-
T 35208	TL 40 H300	40	18F	St	2517	60	161.70	160.33	168.0	84	45	-	138.0	19.5	-
T 35209	TL 44 H300	44	19F	St	2517	60	177.87	176.50	184.0	86	45	119	152.0	20.5	-
T 35210	TL 48 H300	48	19F	St	2517	60	194.04	192.67	200.0	86	45	119	169.0	20.5	-
T 35211	TL 60 H300	60	20	GG	2517	60	242.55	241.18	-	86	45	119	223.0	20.5	-
T 35212	TL 72 H300	72	20	GG	2517	60	291.06	289.69	-	86	45	119	270.0	20.5	-
T 35213	TL 84 H300	84	20	GG	2517	60	339.57	338.20	-	86	45	119	320.0	20.5	-
T 35214	TL 96 H300	96	20	GG	3030	75	388.08	386.71	-	86	76	150	362.0	5.0	-
T 35215	TL 120 H300	120	20	GG	3030	75	485.10	483.73	-	86	76	150	460.0	5.0	-

## Info:

St = Oce


GG = Šedá liatina




# Ozubené remenice HTD 3 M

Rozteč 3 mm


Hliník



Prevedenie 1F



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 9 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Výpočtový Ø	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 22026	10-3 M-09	10	1F	9.55	8.79	12.0	10.2	17.5	12.0	-	0.004
T 22027	12-3 M-09	12	1F	11.46	10.70	15.0	10.2	17.5	15.0	-	0.006
T 22028	14-3 M-09	14	1F	13.37	12.61	16.0	10.2	17.5	16.0	-	0.007
T 22029	15-3 M-09	15	1F	14.32	13.56	17.5	10.2	17.5	17.5	-	0.008
T 22030	16-3 M-09	16	2F	15.28	14.52	17.5	12.8	20.6	10.0	4	0.007
T 22031	18-3 M-09	18	2F	17.19	16.43	19.5	12.8	20.6	11.0	6	0.008
T 22032	20-3 M-09	20	2F	19.10	18.34	23.0	12.8	20.6	13.0	6	0.010
T 22033	21-3 M-09	21	2F	20.05	19.29	25.0	12.8	20.6	14.0	6	0.013
T 22034	22-3 M-09	22	2F	21.01	20.25	25.0	12.8	20.6	14.0	6	0.014
T 22035	24-3 M-09	24	2F	22.92	22.16	25.0	12.8	20.6	14.0	6	0.016
T 22036	26-3 M-09	26	2F	24.83	24.07	28.0	12.8	20.6	16.0	6	0.018
T 22037	28-3 M-09	28	2F	26.74	25.98	32.0	12.8	20.6	18.0	6	0.024
T 22038	30-3 M-09	30	2F	28.65	27.89	32.0	12.8	20.6	20.0	6	0.028
T 22039	32-3 M-09	32	2F	30.56	29.80	36.0	12.8	20.6	22.0	6	0.032
T 22040	36-3 M-09	36	2F	34.38	33.62	38.0	13.4	22.2	26.0	6	0.045
T 22041	40-3 M-09	40	2F	38.20	37.44	42.0	13.4	22.2	28.0	6	0.055
T 22042	44-3 M-09	44	2F	42.02	41.26	48.0	13.4	22.2	33.0	6	0.074
T 22043	48-3 M-09	48	2	45.84	45.08	-	13.4	22.2	33.0	8	0.074
T 22044	60-3 M-09	60	2	57.30	56.54	-	13.4	22.2	33.0	8	0.106
T 41486	72-3 M-09	72	2	68.76	68.00	-	13.4	22.2	33.0	8	0.145


## Pre šírku reme a 15 mm

T 22045	10-3 M-15	10	1F	9.55	8.79	12.0	17.0	26.0	12.0	-	0.006
T 22046	12-3 M-15	12	1F	11.46	10.70	15.0	17.0	26.0	15.0	-	0.008
T 22047	14-3 M-15	14	1F	13.37	12.61	16.0	17.0	26.0	16.0	-	0.010
T 22048	15-3 M-15	15	1F	14.32	13.56	17.5	17.0	26.0	17.5	-	0.012
T 22049	16-3 M-15	16	2F	15.28	14.52	17.5	19.5	26.0	10.0	4	0.010
T 22050	18-3 M-15	18	2F	17.19	16.43	19.5	19.5	26.0	11.0	6	0.012
T 22051	20-3 M-15	20	2F	19.10	18.34	23.0	19.5	26.0	13.0	6	0.014
T 22052	21-3 M-15	21	2F	20.05	19.29	25.0	19.5	26.0	14.0	6	0.016
T 22053	22-3 M-15	22	2F	21.01	20.25	25.0	19.5	26.0	14.0	6	0.018
T 22054	24-3 M-15	24	2F	22.92	22.16	25.0	19.5	26.0	14.0	6	0.020
T 22055	26-3 M-15	26	2F	24.83	24.07	28.0	19.5	26.0	16.0	6	0.027
T 22056	28-3 M-15	28	2F	26.74	25.98	32.0	19.5	26.0	18.0	6	0.030
T 22057	30-3 M-15	30	2F	28.65	27.89	32.0	19.5	26.0	20.0	6	0.035
T 22058	32-3 M-15	32	2F	30.56	29.80	36.0	19.5	26.0	22.0	6	0.042
T 22059	36-3 M-15	36	2F	34.38	33.62	38.0	20.0	30.0	26.0	6	0.060
T 22060	40-3 M-15	40	2F	38.20	37.44	42.0	20.0	30.0	28.0	6	0.075
T 22061	44-3 M-15	44	2F	42.02	41.26	48.0	20.0	30.0	33.0	6	0.095
T 22062	48-3 M-15	48	2	45.84	45.08	-	20.0	30.0	33.0	8	0.103
T 22063	60-3 M-15	60	2	68.76	68.00	-	20.0	30.0	33.0	8	0.212
T 41487	72-3 M-15	72	2	68.76	68.00	-	20.0	30.0	33.0	8	0.212


# Ozubené remenice HTD 5 M

Rozteč 5 mm

vi .nižšie



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 9 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 22064	12 -5 M -09	12	2F	St	19.10	17.96	23	14.5	20.0	12.5	-	0.03
T 22065	14 -5 M -09	14	2F	St	22.28	21.14	25	14.5	20.0	13.5	-	0.04
T 22066	15 -5 M -09	15	2F	St	23.87	22.73	28	14.5	20.0	15.5	-	0.05
T 22067	16 -5 M -09	16	2F	St	25.46	24.32	28	14.5	20.0	16.5	-	0.06
T 22068	18 -5 M -09	18	2F	St	28.65	27.51	32	14.5	20.0	20.0	-	0.07
T 22069	20 -5 M -09	20	2F	St	31.83	30.69	36	14.5	22.5	23.0	-	0.10
T 22070	21 -5 M -09	21	2F	St	33.42	32.28	38	14.5	22.5	24.0	-	0.12
T 22071	22 -5 M -09	22	2F	St	35.01	33.87	38	14.5	22.5	25.5	-	0.13
T 22072	24 -5 M -09	24	2F	St	38.20	37.06	42	14.5	22.5	27.0	-	0.15
T 22073	26 -5 M -09	26	2F	St	41.38	40.24	44	14.5	22.5	30.0	-	0.18
T 22074	28 -5 M -09	28	2F	St	44.56	43.42	48	14.5	22.5	30.5	-	0.21
T 22075	30 -5 M -09	30	2F	St	47.75	46.60	51	14.5	22.5	35.0	-	0.25
T 22076	32 -5 M -09	32	2F	St	50.93	49.79	54	14.5	22.5	38.0	8	0.28
T 22077	36 -5 M -09	36	2F	St	57.30	56.16	60	14.5	22.5	38.0	8	0.33
T 22078	40 -5 M -09	40	2F	St	63.66	62.52	71	14.5	22.5	38.0	8	0.42
T 22079	44 -5 M -09	44	2	AL	70.03	68.89	-	14.5	25.5	38.0	8	0.17
T 22080	48 -5 M -09	48	2	AL	76.39	75.25	-	14.5	25.5	45.0	8	0.18
T 22081	60 -5 M -09	60	2	AL	95.49	94.35	-	14.5	25.5	45.0	8	0.23
T 41488	72 -5 M -09	72	2	AL	114.59	113.45	-	14.5	25.5	45.0	8	0.27

## Pre šírku reme a 15 mm

T 22082	12 -5 M -15	12	2F	St	19.10	17.96	23	20.5	26.0	13.0	-	0.03
T 22083	14 -5 M -15	14	2F	St	22.28	21.14	25	20.5	26.0	14.0	-	0.04
T 22084	15 -5 M -15	15	2F	St	23.87	22.73	28	20.5	26.0	16.0	-	0.05
T 22085	16 -5 M -15	16	2F	St	25.46	24.32	28	20.5	26.0	16.5	-	0.06
T 22086	18 -5 M -15	18	2F	St	28.65	27.51	32	20.5	26.0	20.0	-	0.09
T 22087	20 -5 M -15	20	2F	St	31.83	30.69	36	20.5	26.0	23.0	-	0.12
T 22088	21 -5 M -15	21	2F	St	33.42	32.28	38	20.5	26.0	24.0	-	0.14
T 22089	22 -5 M -15	22	2F	St	35.01	33.87	38	20.5	26.0	25.5	-	0.15
T 22090	24 -5 M -15	24	2F	St	38.20	37.06	42	20.5	28.0	27.0	-	0.19
T 22091	26 -5 M -15	26	2F	St	41.38	40.24	44	20.5	28.0	30.0	-	0.23
T 22092	28 -5 M -15	28	2F	St	44.56	43.42	48	20.5	28.0	30.5	-	0.26
T 22093	30 -5 M -15	30	2F	St	47.75	46.60	51	20.5	28.0	35.0	-	0.32
T 22094	32 -5 M -15	32	2F	St	50.93	49.79	54	20.5	28.0	38.0	8	0.35
T 22095	36 -5 M -15	36	2F	St	57.30	56.16	60	20.5	28.0	38.0	8	0.43
T 22096	40 -5 M -15	40	2F	St	63.66	62.52	71	20.5	28.0	38.0	8	0.52
T 22097	44 -5 M -15	44	2	AL	70.03	68.89	-	20.5	30.0	38.0	8	0.23
T 22098	48 -5 M -15	48	2	AL	76.39	75.25	-	20.5	30.0	38.0	8	0.29
T 22099	60 -5 M -15	60	2	AL	95.49	94.35	-	20.5	30.0	50.0	8	0.30
T 41489	72 -5 M -15	72	2	AL	114.59	113.45	-	20.5	30.0	50.0	8	0.38

### Info:


St = Oce

AL = Hliník


# Ozubené remenice HTD 5 M

Rozteč 5 mm

vi .nižšie



Prevedenie 2F



Prevedenie 2

## Pre šírku reme a 25 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiá	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 22100	12 -5 M -25	12	2F	St	19.10	17.96	23	30.5	36.0	13.0	-	0.05
T 22101	14 -5 M -25	14	2F	St	22.28	21.14	25	30.5	36.0	14.0	-	0.08
T 22102	15 -5 M -25	15	2F	St	23.87	22.73	28	30.5	36.0	16.0	-	0.09
T 22103	16 -5 M -25	16	2F	St	25.46	24.32	28	30.5	36.0	16.5	-	0.11
T 22104	18 -5 M -25	18	2F	St	28.65	27.51	32	30.5	36.0	20.0	-	0.13
T 22105	20 -5 M -25	20	2F	St	31.83	30.69	36	30.5	36.0	23.0	-	0.17
T 22106	21 -5 M -25	21	2F	St	33.42	32.28	38	30.5	38.0	24.0	-	0.20
T 22107	22 -5 M -25	22	2F	St	35.01	33.87	38	30.5	38.0	25.5	-	0.22
T 22108	24 -5 M -25	24	2F	St	38.20	37.06	42	30.5	38.0	27.0	-	0.26
T 22109	26 -5 M -25	26	2F	St	41.38	40.24	44	30.5	38.0	30.0	-	0.32
T 22110	28 -5 M -25	28	2F	St	44.56	43.42	48	30.5	38.0	30.5	-	0.37
T 22111	30 -5 M -25	30	2F	St	47.75	46.60	51	30.5	38.0	35.0	-	0.44
T 22112	32 -5 M -25	32	2F	St	50.93	49.79	54	30.5	38.0	38.0	8	0.48
T 22113	36 -5 M -25	36	2F	St	57.30	56.16	60	30.5	38.0	38.0	8	0.59
T 22114	40 -5 M -25	40	2F	St	63.66	62.52	71	30.5	38.0	38.0	8	0.75
T 22115	44 -5 M -25	44	2	AL	70.03	68.89	-	30.5	40.0	38.0	8	0.32
T 22116	48 -5 M -25	48	2	AL	76.39	75.25	-	30.5	40.0	38.0	8	0.28
T 22117	60 -5 M -25	60	2	AL	95.49	94.35	-	30.5	40.0	50.0	8	0.44
T 41490	72 -5 M -25	72	2	AL	114.59	113.45	-	30.5	40.0	50.0	8	0.53

### Info:



St = Oce

AL = Hliník


# Ozubené remenice HTD 8 M

Rozteč 8 mm


vi .nižšie




Prevedenie 2F



Prevedenie 3F



Prevedenie 3



Prevedenie 4

## Pre šírku reme a 20 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	Ø d	kg
T 22118	22-8 M-20	22	2F	St	56.02	54.65	60.0	28	38	43	-	12	0.54
T 22119	24-8 M-20	24	2F	St	61.11	59.74	66.0	28	38	45	-	12	0.65
T 22120	26-8 M-20	26	2F	St	66.21	64.84	71.0	28	38	48	-	12	0.80
T 22121	28-8 M-20	28	2F	St	71.30	70.08	75.0	28	38	50	-	14	0.88
T 22122	30-8 M-20	30	2F	St	76.39	75.13	83.0	28	38	55	-	14	1.00
T 22123	32-8 M-20	32	2F	St	81.49	80.16	87.0	28	38	60	-	14	1.20
T 22124	34-8 M-20	34	2F	St	86.58	85.21	91.0	28	38	66	-	14	1.40
T 22125	36-8 M-20	36	2F	St	91.67	90.30	98.5	28	38	70	-	14	1.60
T 22126	38-8 M-20	38	2F	St	96.77	95.39	103.0	28	38	75	-	14	1.70
T 22127	40-8 M-20	40	2F	St	101.86	100.49	106.0	28	38	75	-	14	1.85
T 22128	44-8 M-20	44	2F	St	112.05	110.67	119.0	28	38	75	-	14	2.10
T 22129	48-8 M-20	48	2F	St	122.23	120.86	127.0	28	38	75	-	14	2.50
T 22130	56-8 M-20	56	3F	St	142.60	141.23	148.0	28	38	80	116	14	2.90
T 41491	64-8 M-20	64	3F	St	162.97	161.60	168.0	28	38	80	137	14	3.33
T 41492	72-8 M-20	72	3F	St	183.35	181.97	192.0	28	38	80	158	14	3.74
T 41493	80-8 M-20	80	3	GG	203.72	202.35	-	28	38	90	180	14	-
T 41494	90-8 M-20	90	3	GG	229.18	227.81	-	28	38	90	204	14	-

## Pre šírku reme a 30 mm

T 22131	22-8 M-30	22	2F	St	56.02	54.65	60.0	38	48	43	-	12	0.75
T 22132	24-8 M-30	24	2F	St	61.11	59.74	66.0	38	48	45	-	12	0.90
T 22133	26-8 M-30	26	2F	St	66.21	64.84	71.0	38	48	48	-	12	1.10
T 22134	28-8 M-30	28	2F	St	71.30	70.08	75.0	38	48	50	-	14	1.20
T 22135	30-8 M-30	30	2F	St	76.39	75.13	83.0	38	48	55	-	14	1.32
T 22136	32-8 M-30	32	2F	St	81.49	80.16	87.0	38	48	60	-	14	1.55
T 22137	34-8 M-30	34	2F	St	86.58	85.21	91.0	38	48	66	-	14	1.80
T 22138	36-8 M-30	36	2F	St	91.67	90.30	98.5	38	48	70	-	14	2.10
T 22139	38-8 M-30	38	2F	St	96.77	95.39	103.0	38	48	75	-	14	2.30
T 22140	40-8 M-30	40	2F	St	101.86	100.49	106.0	38	48	75	-	14	2.47
T 22141	44-8 M-30	44	2F	St	112.05	110.67	119.0	38	48	75	-	14	2.95
T 22142	48-8 M-30	48	2F	St	122.23	120.86	127.0	38	48	75	-	14	3.30
T 22143	56-8 M-30	56	3F	St	142.60	141.23	148.0	38	48	90	116	14	3.86
T 41495	64-8 M-30	64	3F	St	162.97	161.60	168.0	38	48	90	137	14	4.42
T 41496	72-8 M-30	72	3F	St	183.35	181.97	192.0	38	48	95	158	14	4.97
T 41497	80-8 M-30	80	3	GG	203.72	202.35	-	38	48	100	180	14	-
T 41498	90-8 M-30	90	3	GG	229.18	227.81	-	38	48	100	204	14	-
T 41499	112-8 M-30	112	4	GG	285.21	283.83	-	38	48	100	254	18	-
T 41500	144-8 M-30	144	4	GG	366.69	365.32	-	38	48	100	336	20	-
T 41501	168-8 M-30	168	4	GG	427.81	426.44	-	38	48	100	400	20	-
T 41502	192-8 M-30	192	4	GG	488.92	487.55	-	38	48	100	460	20	-

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice HTD 8 M

Rozteč 8 mm


vi .nižšie




Prevedenie 2F



Prevedenie 7F



Prevedenie 7



Prevedenie 8

## Pre šírku reme a 50 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Mate- riál	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	Ø d	kg
T 22144	22-8 M -50	22	2F	St	56.02	54.65	60.0	60	70	43	-	-	1.10
T 22145	24-8 M -50	24	2F	St	61.11	59.74	66.0	60	70	45	-	-	1.30
T 22146	26-8 M -50	26	2F	St	66.21	64.84	71.0	60	70	48	-	-	1.60
T 22147	28-8 M -50	28	2F	St	71.30	70.08	75.0	60	70	50	-	-	1.70
T 22148	30-8 M -50	30	2F	St	76.39	75.13	83.0	60	70	55	-	-	2.00
T 22149	32-8 M -50	32	2F	St	81.49	80.16	87.0	60	70	60	-	-	2.35
T 22150	34-8 M -50	34	2F	St	86.58	85.21	91.0	60	70	66	-	-	2.80
T 22151	36-8 M -50	36	2F	St	91.67	90.30	98.5	60	70	70	-	-	3.10
T 22152	38-8 M -50	38	2F	St	96.77	95.39	103.0	60	70	75	-	-	3.30
T 22153	40-8 M -50	40	2F	St	101.86	100.49	106.0	60	70	75	-	-	3.60
T 22154	44-8 M -50	44	2F	St	112.05	110.67	119.0	60	70	75	-	-	4.40
T 22155	48-8 M -50	48	2F	St	122.23	120.86	127.0	60	70	75	-	-	5.00
T 22156	56-8 M -50	56	7F	St	142.60	141.23	148.0	60	60	90	116	18	5.80
T 41504	64-8 M -50	64	7F	St	162.97	161.60	168.0	60	60	100	137	18	6.66
T 41505	72-8 M -50	72	7F	St	183.35	181.97	192.0	60	60	100	158	18	7.49
T 41506	80-8 M -50	80	7	GG	203.72	202.35	-	60	60	110	180	18	-
T 41507	90-8 M -50	90	7	GG	229.18	227.81	-	60	60	110	204	18	-
T 41508	112-8 M -50	112	8	GG	285.21	283.83	-	60	60	110	254	18	-
T 41509	144-8 M -50	144	8	GG	366.69	365.32	-	60	60	110	336	20	-
T 41510	168-8 M -50	168	8	GG	427.81	426.44	-	60	60	120	400	20	-
T 41511	192-8 M -50	192	8	GG	488.92	487.55	-	60	60	130	460	20	-

## Pre šírku reme a 85 mm

T 22157	22-8 M -85	22	2F	St	56.02	54.65	60.0	95	105	43	-	-	1.60
T 22158	24-8 M -85	24	2F	St	61.11	59.74	66.0	95	105	45	-	-	1.95
T 22159	26-8 M -85	26	2F	St	66.21	64.84	71.0	95	105	48	-	-	2.30
T 22160	28-8 M -85	28	2F	St	71.30	70.08	75.0	95	105	50	-	-	2.60
T 22161	30-8 M -85	30	2F	St	76.39	75.13	83.0	95	105	55	-	-	3.10
T 22162	32-8 M -85	32	2F	St	81.49	80.16	87.0	95	105	60	-	-	3.70
T 22163	34-8 M -85	34	2F	St	86.58	85.21	91.0	95	105	66	-	-	4.00
T 22164	36-8 M -85	36	2F	St	91.67	90.30	98.5	95	105	70	-	-	4.70
T 22165	38-8 M -85	38	2F	St	96.77	95.39	103.0	95	105	75	-	-	5.10
T 22166	40-8 M -85	40	2F	St	101.86	100.49	106.0	95	105	75	-	-	5.40
T 22167	44-8 M -85	44	2F	St	112.05	110.67	119.0	95	105	75	-	-	6.70
T 22168	48-8 M -85	48	2F	St	122.23	120.86	127.0	95	105	75	-	-	7.20
T 22169	56-8 M -85	56	2F	St	142.60	141.23	148.0	95	105	80	-	-	10.20
T 41512	64-8 M -85	64	7F	St	162.97	161.60	168.0	95	95	100	137	-	11.65
T 41513	72-8 M -85	72	7F	St	183.35	181.97	192.0	95	95	110	158	-	13.10
T 41514	80-8 M -85	80	8	GG	203.72	202.35	-	95	95	110	180	20	-
T 41515	90-8 M -85	90	8	GG	229.18	227.81	-	95	95	110	204	20	-
T 41516	112-8 M -85	112	8	GG	285.21	283.83	-	95	95	110	254	24	-

### Info:

St = Oce



GG = Šedá liatina




# Ozubené remenice HTD 14 M

Rozteč 14 mm


vi .nižšie




Prevedenie 2F




Prevedenie 3F



Prevedenie 4



Prevedenie 7F



Prevedenie 8

## Pre šírku reme a 40 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	Ø d	kg
T 22170	28 -14 M -40	28	2F	St	124.78	122.12	127	54	69	100	-	24	4.8
T 22172	30 -14 M -40	30	2F	St	133.69	130.99	138	54	69	100	-	24	5.6
T 22173	32 -14 M -40	32	2F	St	142.60	139.88	154	54	69	100	-	24	6.2
T 22174	34 -14 M -40	34	2F	St	151.52	148.79	160	54	69	100	-	24	6.9
T 22175	36 -14 M -40	36	2F	St	160.43	157.68	168	54	69	100	-	24	7.7
T 22176	38 -14 M -40	38	2F	St	169.34	166.60	183	54	69	120	-	24	8.9
T 22177	40 -14 M -40	40	2F	St	178.25	175.49	188	54	69	120	-	24	9.8
T 22178	44 -14 M -40	44	2F	St	196.08	193.28	211	54	69	120	-	24	12.0
T 22179	48 -14 M -40	48	3F	GG	213.90	211.11	226	54	69	135	170	24	-
T 22180	56 -14 M -40	56	3F	GG	249.55	246.76	256	54	69	135	207	28	-
T 41517	64 -14 M -40	64	3F	GG	285.21	282.41	296	54	69	135	240	28	-
T 41518	72 -14 M -40	72	4	GG	320.86	318.06	-	54	69	135	278	28	-
T 41519	80 -14 M -40	80	4	GG	356.51	353.71	-	54	69	135	314	28	-
T 41520	90 -14 M -40	90	4	GG	401.07	398.28	-	54	69	135	358	28	-
T 41521	112 -14 M -40	112	4	GG	499.11	496.32	-	54	69	135	456	28	-

## Pre šírku reme a 55 mm

T 22181	28 -14 M -55	28	2F	St	124.78	122.12	127	70	85	100	-	24	5.7
T 22183	30 -14 M -55	30	2F	St	133.69	130.99	138	70	85	100	-	24	7.1
T 22184	32 -14 M -55	32	2F	St	142.60	139.88	154	70	85	100	-	24	7.9
T 22185	34 -14 M -55	34	2F	St	151.52	148.79	160	70	85	100	-	24	8.4
T 22186	36 -14 M -55	36	2F	St	160.43	157.68	168	70	85	100	-	24	9.7
T 22187	38 -14 M -55	38	2F	St	169.34	166.60	183	70	85	120	-	24	11.4
T 22188	40 -14 M -55	40	2F	St	178.25	175.49	188	70	85	120	-	24	12.6
T 22189	44 -14 M -55	44	2F	St	196.08	193.28	211	70	85	120	-	24	15.3
T 22190	48 -14 M -55	48	7F	GG	213.90	211.11	226	70	70	135	170	24	-
T 22191	56 -14 M -55	56	7F	GG	249.55	246.76	256	70	70	135	207	28	-
T 41522	64 -14 M -55	64	7F	GG	285.21	282.41	296	70	70	135	240	28	-
T 41523	72 -14 M -55	72	8	GG	320.86	318.06	-	70	70	135	278	28	-
T 41524	80 -14 M -55	80	8	GG	356.51	353.71	-	70	70	135	314	28	-
T 41525	90 -14 M -55	90	8	GG	401.07	398.28	-	70	70	135	358	28	-
T 41526	112 -14 M -55	112	8	GG	499.11	496.32	-	70	70	135	456	28	-
T 41527	144 -14 M -55	144	8	GG	641.71	638.92	-	70	70	135	600	28	-
T 41528	168 -14 M -55	168	8	GG	748.66	745.87	-	70	70	135	706	28	-
T 41529	192 -14 M -55	192	8	GG	855.62	852.82	-	70	70	135	813	28	-

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice HTD 14 M

Rozteč 14 mm


vi .nižšie



Prevedenie 2F



Prevedenie 7F



Prevedenie 8

## Pre šírku reme a 85 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Mate- riál	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	Ø d	kg
T 22192	28 -14 M -85	28	2F	St	124.78	122.12	127	102	117	100	-	24	8.4
T 22194	30 -14 M -85	30	2F	St	133.69	130.99	138	102	117	100	-	24	9.2
T 22195	32 -14 M -85	32	2F	St	142.60	139.88	154	102	117	100	-	24	11.2
T 22196	34 -14 M -85	34	2F	St	151.52	148.79	160	102	117	100	-	24	12.1
T 22197	36 -14 M -85	36	2F	St	160.43	157.68	168	102	117	100	-	32	13.4
T 22198	38 -14 M -85	38	2F	St	169.34	166.60	183	102	117	120	-	32	15.4
T 22199	40 -14 M -85	40	2F	St	178.25	175.49	188	102	117	135	-	32	17.3
T 22200	44 -14 M -85	44	2F	St	196.08	193.28	211	102	117	135	-	32	21.3
T 22201	48 -14 M -85	48	2F	St	213.90	211.11	226	102	117	150	-	32	25.5
T 22202	56 -14 M -85	56	7F	GG	249.55	246.76	256	102	102	150	207	32	-
T 41530	64 -14 M -85	64	7F	GG	285.21	282.41	296	102	102	150	240	32	-
T 41531	72 -14 M -85	72	8	GG	320.86	318.06	-	102	102	150	278	32	-
T 41532	80 -14 M -85	80	8	GG	356.51	353.71	-	102	102	150	314	32	-
T 41533	90 -14 M -85	90	8	GG	401.07	398.28	-	102	102	150	358	32	-
T 41534	112 -14 M -85	112	8	GG	499.11	496.32	-	102	102	150	456	32	-
T 41535	144 -14 M -85	144	8	GG	641.71	638.92	-	102	102	150	600	32	-
T 41536	168 -14 M -85	168	8	GG	748.66	745.87	-	102	102	150	706	32	-
T 41537	192 -14 M -85	192	8	GG	855.62	852.82	-	102	102	165	813	32	-

## Pre šírku reme a 115 mm

T 22203	28 -14 M -115	28	2F	St	124.78	122.12	127	133	148	100	-	32	10.0
T 22205	30 -14 M -115	30	2F	St	133.69	130.99	138	133	148	100	-	32	11.6
T 22206	32 -14 M -115	32	2F	St	142.60	139.88	154	133	148	100	-	32	13.3
T 22207	34 -14 M -115	34	2F	St	151.52	148.79	160	133	148	100	-	32	15.0
T 22208	36 -14 M -115	36	2F	St	160.43	157.68	168	133	148	120	-	32	16.7
T 22209	38 -14 M -115	38	2F	St	169.34	166.60	183	133	148	120	-	32	19.8
T 22210	40 -14 M -115	40	2F	St	178.25	175.49	188	133	148	135	-	32	22.3
T 22211	44 -14 M -115	44	2F	St	196.08	193.28	211	133	148	140	-	32	27.3
T 22212	48 -14 M -115	48	2F	St	213.90	211.11	226	133	148	150	-	32	32.2
T 22213	56 -14 M -115	56	2F	St	249.55	246.76	256	133	148	150	-	32	44.5
T 41538	64 -14 M -115	64	7F	GG	285.21	282.41	296	133	133	150	240	32	-
T 41539	72 -14 M -115	72	8	GG	320.86	318.06	-	133	133	150	278	32	-
T 41540	80 -14 M -115	80	8	GG	356.51	353.71	-	133	133	150	314	32	-
T 41541	90 -14 M -115	90	8	GG	401.07	398.28	-	133	133	150	358	32	-
T 41542	112 -14 M -115	112	8	GG	499.11	496.32	-	133	133	150	456	32	-
T 41543	144 -14 M -115	144	8	GG	641.71	638.92	-	133	133	165	600	32	-
T 41544	168 -14 M -115	168	8	GG	748.66	745.87	-	133	133	165	706	32	-
T 41545	192 -14 M -115	192	8	GG	855.62	852.82	-	133	133	165	813	32	-

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice HTD 14 M

Rozteč 14 mm


vi .nižšie



Prevedenie 2F



Prevedenie 7



Prevedenie 8

## Pre šírku reme a 170 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Ø Dp	Ø De	Ø Df	F	L	Dm	Di	Ø d	kg
T 22214	28 -14 M -170	28	2F	St	124.78	122.12	127	187	202	100	-	32	14.0
T 22216	30 -14 M -170	30	2F	St	133.69	130.99	138	187	202	100	-	32	15.8
T 22217	32 -14 M -170	32	2F	St	142.60	139.88	154	187	202	100	-	32	18.2
T 22218	34 -14 M -170	34	2F	St	151.52	148.79	160	187	202	100	-	32	20.5
T 22219	36 -14 M -170	36	2F	St	160.43	157.68	168	187	202	120	-	32	23.6
T 22220	38 -14 M -170	38	2F	St	169.34	166.60	183	187	202	135	-	32	26.7
T 22221	40 -14 M -170	40	2F	St	178.25	175.49	188	187	202	140	-	32	30.2
T 41546	80 -14 M -170	80	7	GG	356.51	353.71	-	187	187	180	314	32	-
T 41547	90 -14 M -170	90	8	GG	401.07	398.28	-	187	187	180	358	38	-
T 41548	112 -14 M -170	112	8	GG	499.11	496.32	-	187	187	200	456	38	-

### Info:



St = Oce

GG = Šedá liatina


# Ozubené remenice GT 3MR

Rozteč 3 mm


Hliník



Prevedenie 1F



Prevedenie 6F



Prevedenie 6

## Pre šírku reme a 9 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiá	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 76732	10 -3MR -09	10	1F	9.55	8.79	13.0	10.2	17.5	13.0	-	-	0.004
T 76733	12 -3MR -09	12	1F	11.46	10.70	15.0	10.2	17.5	15.0	-	-	0.006
T 76734	14 -3MR -09	14	1F	13.37	12.61	16.0	10.2	17.5	16.0	-	-	0.007
T 76735	15 -3MR -09	15	1F	14.32	13.56	17.5	10.2	17.5	17.5	-	-	0.008
T 76736	16 -3MR -09	16	6F	15.28	14.52	18.0	12.8	20.6	9.5	4	4	0.007
T 76737	18 -3MR -09	18	6F	17.19	16.43	19.5	12.8	20.6	10.0	6	6	0.008
T 76738	20 -3MR -09	20	6F	19.10	18.34	23.0	12.8	20.6	12.0	6	6	0.010
T 76739	21 -3MR -09	21	6F	20.05	19.29	25.0	12.8	20.6	13.0	6	6	0.013
T 76740	22 -3MR -09	22	6F	21.01	20.25	25.0	12.8	20.6	13.0	6	6	0.014
T 76741	24 -3MR -09	24	6F	22.92	22.16	25.0	12.8	20.6	13.0	6	6	0.016
T 76742	26 -3MR -09	26	6F	24.83	24.07	28.0	12.8	20.6	16.0	6	6	0.018
T 76743	28 -3MR -09	28	6F	26.74	25.98	32.0	12.8	20.6	18.0	6	6	0.024
T 76744	30 -3MR -09	30	6F	28.65	27.89	32.0	12.8	20.6	19.0	6	6	0.028
T 76745	32 -3MR -09	32	6F	30.56	29.80	36.0	12.8	20.6	22.0	6	6	0.032
T 76746	36 -3MR -09	36	6F	34.38	33.62	38.0	13.4	22.2	26.0	6	6	0.045
T 76747	40 -3MR -09	40	6F	38.20	37.44	42.0	13.4	22.2	28.0	6	6	0.055
T 76748	44 -3MR -09	44	6F	42.02	41.26	48.0	13.4	22.2	33.0	6	6	0.074
T 76749	48 -3MR -09	48	6	45.84	45.08	-	13.4	22.2	33.0	8	8	0.074
T 76750	60 -3MR -09	60	6	57.30	56.54	-	13.4	22.2	33.0	8	8	0.106
T 76751	72 -3MR -09	72	6	68.75	67.99	-	13.4	22.2	33.0	8	8	0.145


## Pre šírku reme a 15 mm

T 76752	10 -3MR -15	10	1F	9.55	8.79	13.0	17.0	26.0	13.0	-	-	0.006
T 76753	12 -3MR -15	12	1F	11.46	10.70	15.0	17.0	26.0	15.0	-	-	0.008
T 76754	14 -3MR -15	14	1F	13.37	12.61	16.0	17.0	26.0	16.0	-	-	0.010
T 76755	15 -3MR -15	15	1F	14.32	13.56	17.5	17.0	26.0	17.5	-	-	0.012
T 76756	16 -3MR -15	16	6F	15.28	14.52	18.0	19.5	26.0	9.5	4	4	0.010
T 76757	18 -3MR -15	18	6F	17.19	16.43	19.5	19.5	26.0	10.0	6	6	0.012
T 76758	20 -3MR -15	20	6F	19.10	18.34	23.0	19.5	26.0	12.0	6	6	0.014
T 76759	21 -3MR -15	21	6F	20.05	19.29	25.0	19.5	26.0	13.0	6	6	0.016
T 76760	22 -3MR -15	22	6F	21.01	20.25	25.0	19.5	26.0	13.0	6	6	0.018
T 76761	24 -3MR -15	24	6F	22.92	22.16	25.0	19.5	26.0	13.0	6	6	0.020
T 76762	26 -3MR -15	26	6F	24.83	24.07	28.0	19.5	26.0	16.0	6	6	0.027
T 76763	28 -3MR -15	28	6F	26.74	25.98	32.0	19.5	26.0	18.0	6	6	0.030
T 76764	30 -3MR -15	30	6F	28.65	27.89	32.0	19.5	26.0	20.0	6	6	0.035
T 76765	32 -3MR -15	32	6F	30.56	29.80	36.0	19.5	26.0	22.0	6	6	0.042
T 76766	36 -3MR -15	36	6F	34.38	33.62	38.0	20.0	30.0	26.0	6	6	0.060
T 76767	40 -3MR -15	40	6F	38.20	37.44	42.0	20.0	30.0	28.0	6	6	0.075
T 76768	44 -3MR -15	44	6F	42.02	41.26	48.0	20.0	30.0	33.0	6	6	0.100
T 76769	48 -3MR -15	48	6	45.84	45.08	-	20.0	30.0	33.0	8	8	0.103
T 76770	60 -3MR -15	60	6	57.30	56.54	-	20.0	30.0	33.0	8	8	0.150
T 76771	72 -3MR -15	72	6	68.75	67.99	-	20.0	30.0	33.0	8	8	0.212


# Ozubené remenice GT 5MR

Rozteč 5 mm

vi .nižšie



Prevedenie 6F



Prevedenie 6W

## Pre šírku reme a 9 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Mate- riá	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 76772	12 -5MR -09	12	6F	St	19.10	17.96	23	14.5	20.0	12.5	4	0.028
T 76773	14 -5MR -09	14	6F	St	22.28	21.14	25	14.5	20.0	13.5	6	0.034
T 76774	15 -5MR -09	15	6F	St	23.87	22.73	28	14.5	20.0	15.5	6	0.042
T 76775	16 -5MR -09	16	6F	St	25.46	24.32	28	14.5	20.0	16.5	6	0.050
T 76776	18 -5MR -09	18	6F	St	28.65	27.51	32	14.5	20.0	20.0	6	0.070
T 76777	20 -5MR -09	20	6F	St	31.83	30.69	36	14.5	22.5	23.0	6	0.094
T 76778	21 -5MR -09	21	6F	St	33.42	32.28	38	14.5	22.5	24.0	6	0.110
T 76779	22 -5MR -09	22	6F	St	35.01	33.87	38	14.5	22.5	25.5	6	0.118
T 76780	24 -5MR -09	24	6F	St	38.20	37.06	42	14.5	22.5	27.0	6	0.145
T 76781	26 -5MR -09	26	6F	St	41.38	40.24	44	14.5	22.5	30.0	6	0.170
T 76782	28 -5MR -09	28	6F	St	44.56	43.42	48	14.5	22.5	30.5	6	0.200
T 76783	30 -5MR -09	30	6F	St	47.75	46.60	51	14.5	22.5	35.0	6	0.236
T 76784	32 -5MR -09	32	6F	St	50.93	49.79	54	14.5	22.5	38.0	8	0.270
T 76785	36 -5MR -09	36	6F	St	57.30	56.16	60	14.5	22.5	38.0	8	0.324
T 76786	40 -5MR -09	40	6F	St	63.66	62.52	71	14.5	22.5	38.0	8	0.400
T 76787	44 -5MR -09	44	6W	AL	70.03	68.89	-	14.5	25.5	38.0	8	0.170
T 76788	48 -5MR -09	48	6W	AL	76.39	75.25	-	14.5	25.5	45.0	8	0.182
T 76789	60 -5MR -09	60	6W	AL	95.49	94.35	-	14.5	25.5	45.0	8	0.230
T 76790	72 -5MR -09	72	6W	AL	114.59	113.45	-	14.5	25.5	45.0	8	0.270

## Pre šírku reme a 15 mm

T 76791	12 -5MR -15	12	6F	St	19.10	17.96	23	20.5	26.0	13.0	4	0,034
T 76792	14 -5MR -15	14	6F	St	22.28	21.14	25	20.5	26.0	14.0	6	0.046
T 76793	15 -5MR -15	15	6F	St	23.87	22.73	28	20.5	26.0	16.0	6	0.056
T 76794	16 -5MR -15	16	6F	St	25.46	24.32	28	20.5	26.0	16.5	6	0.064
T 76795	18 -5MR -15	18	6F	St	28.65	27.51	32	20.5	26.0	20.0	6	0.086
T 76796	20 -5MR -15	20	6F	St	31.83	30.69	36	20.5	26.0	23.0	6	0.112
T 76797	21 -5MR -15	21	6F	St	33.42	32.28	38	20.5	26.0	24.0	6	0.130
T 76798	22 -5MR -15	22	6F	St	35.01	33.87	38	20.5	26.0	25.5	6	0.140
T 76799	24 -5MR -15	24	6F	St	38.20	37.06	42	20.5	28.0	27.0	6	0.180
T 76800	26 -5MR -15	26	6F	St	41.38	40.24	44	20.5	28.0	30.0	6	0.220
T 76801	28 -5MR -15	28	6F	St	44.56	43.42	48	20.5	28.0	30.5	6	0.250
T 76802	30 -5MR -15	30	6F	St	47.75	46.60	51	20.5	28.0	35.0	6	0.300
T 76803	32 -5MR -15	32	6F	St	50.93	49.79	54	20.5	28.0	38.0	8	0.350
T 76804	36 -5MR -15	36	6F	St	57.30	56.16	60	20.5	28.0	38.0	8	0.520
T 76805	40 -5MR -15	40	6F	St	63.66	62.52	71	20.5	28.0	38.0	8	0.426
T 76806	44 -5MR -15	44	6W	AL	70.03	68.89	-	20.5	30.0	38.0	8	0.225
T 76807	48 -5MR -15	48	6W	AL	76.39	75.25	-	20.5	30.0	38.0	8	0.187
T 76808	60 -5MR -15	60	6W	AL	95.49	94.35	-	20.5	30.0	50.0	8	0.305
T 76809	72 -5MR -15	72	6W	AL	114.59	113.45	-	20.5	30.0	50.0	8	0.375

### Info:

St = Oce


AL = Hliník




# Ozubené remenice GT 5MR

Rozteč 5 mm

vi .nižšie



Prevedenie 6F



Prevedenie 6W

## Pre šírku reme a 25 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiá	Ø Dp	Ø De	Ø Df	F	L	Dm	Ø d	kg
T 76810	12 -5MR -25	12	6F	St	19.10	17.96	23	30.5	36.0	13.0	4	0.050
T 76811	14 -5MR -25	14	6F	St	22.28	21.14	25	30.5	36.0	14.0	6	0.070
T 76812	15 -5MR -25	15	6F	St	23.87	22.73	28	30.5	36.0	16.0	6	0.080
T 76813	16 -5MR -25	16	6F	St	25.46	24.32	28	30.5	36.0	16.5	6	0.100
T 76814	18 -5MR -25	18	6F	St	28.65	27.51	32	30.5	36.0	20.0	6	0.120
T 76815	20 -5MR -25	20	6F	St	31.83	30.69	36	30.5	36.0	23.0	6	0.160
T 76816	21 -5MR -25	21	6F	St	33.42	32.28	38	30.5	38.0	24.0	6	0.190
T 76817	22 -5MR -25	22	6F	St	35.01	33.87	38	30.5	38.0	25.5	6	0.210
T 76818	24 -5MR -25	24	6F	St	38.20	37.06	42	30.5	38.0	27.0	6	0.250
T 76819	26 -5MR -25	26	6F	St	41.38	40.24	44	30.5	38.0	30.0	6	0.300
T 76820	28 -5MR -25	28	6F	St	44.56	43.42	48	30.5	38.0	30.5	6	0.350
T 76821	30 -5MR -25	30	6F	St	47.75	46.60	51	30.5	38.0	35.0	6	0.420
T 76822	32 -5MR -25	32	6F	St	50.93	49.79	54	30.5	38.0	38.0	8	0.480
T 76823	36 -5MR -25	36	6F	St	57.30	56.16	60	30.5	38.0	38.0	8	0.590
T 76824	40 -5MR -25	40	6F	St	63.66	62.52	71	30.5	38.0	38.0	8	0.740
T 76825	44 -5MR -25	44	6W	AL	70.03	68.89	-	30.5	40.0	38.0	8	0.320
T 76826	48 -5MR -25	48	6W	AL	76.39	75.25	-	30.5	40.0	38.0	8	0.275
T 76827	60 -5MR -25	60	6W	AL	95.49	94.35	-	30.5	40.0	50.0	8	0.435
T 76828	72 -5MR -25	72	6W	AL	114.59	113.45	-	30.5	40.0	50.0	8	0.525

### Info:


St = Oce

AL = Hlinik


# Ozubené remenice HTD 5 M pre Taper Lock®

Rozteč 5 mm


Oce C 43



Prevedenie 10



Prevedenie 10F



Prevedenie 15F


## Pre šírku reme a 15 mm

Obj. číslo	Oznaenie	zubov	Preve- denie	Púzdro Taper Lock®	Max. Øhria- de a	Ø Dp	Ø De	Ø Df	L	Dm	Di	R	kg
U 00001	TL 34 5M 15	34	15F	1008	25	54.11	52.97	57	22				0.20
U 00002	TL 36 5M 15	36	15F	1108	25	57.30	56.15	60	22				0.25
U 00003	TL 38 5M 15	38	15F	1108	25	60.48	59.34	66	22				0.30
U 00004	TL 40 5M 15	40	15F	1108	25	63.66	62.52	71	22				0.35
U 00005	TL 44 5M 15	44	15F	1108	25	70.03	68.89	75	22				0.40
U 00006	TL 48 5M 15	48	10F	1210	32	76.39	75.25	83	25	59		3	0.46
U 00007	TL 56 5M 15	56	10F	1210	32	89.13	87.99	93	25	70		3	0.60
U 00008	TL 64 5M 15	64	10F	1210	32	101.86	100.72	106	25	80		3	0.80
U 00009	TL 72 5M 15	72	10	1610	42	114.59	113.45		25	92		3	1.20
U 00010	TL 80 5M 15	80	10	1610	42	127.32	126.18		25	92		3	1.76
U 00011	TL 90 5M 15	90	10	1610	42	143.24	142.10		25	92		3	2.32
U 00012	TL112 5M 15	112	10	2012	50	178.25	177.11		32	110		12	3.72
U 00013	TL136 5M 15	136	13	2012	50	216.45	215.31		32	110	199	6	3.82


# Ozubené remenice HTD 8 M pre Taper Lock®

Rozteč 8 mm


vi .nižšie




Prevedenie 10F




Prevedenie 11F



Prevedenie 11



Prevedenie 12



Prevedenie 15F

## Pre šírku reme a 20 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Di	R	kg
T 35403	TL 22 -8 M -20	22	16F	St	1008	25	56.02	54.65	60	22	-	37	6	0.25
T 35405	TL 24 -8 M -20	24	16F	St	1108	28	61.11	59.74	66	22	-	44	6	0.30
T 35408	TL 26 -8 M -20	26	16F	St	1108	28	66.21	64.84	71	22	-	45	6	0.36
T 35410	TL 28 -8 M -20	28	16F	St	1108	28	71.30	70.08	75	22	-	50	6	0.45
T 35412	TL 30 -8 M -20	30	16F	St	1108	28	76.39	75.13	83	22	-	58	6	0.55
T 35413	TL 32 -8 M -20	32	16F	St	1610	42	81.49	80.16	87	25	-	63	3	0.43
T 35415	TL 34 -8 M -20	34	16F	St	1610	42	86.58	85.21	91	25	-	64	3	0.57
T 35417	TL 36 -8 M -20	36	16F	St	1610	42	91.67	90.30	98	25	-	68	3	0.70
T 35419	TL 38 -8 M -20	38	16F	St	1610	42	96.77	95.39	103	25	-	72	3	0.82
T 35420	TL 40 -8 M -20	40	16F	St	1610	42	101.86	100.49	106	25	-	76	3	1.10
T 35421	TL 44 -8 M -20	44	10F	St	2012	50	112.05	110.67	119	32	92	-	4	1.20
T 35423	TL 48 -8 M -20	48	10F	St	2012	50	122.23	120.86	127	32	96	-	4	1.65
T 35428	TL 56 -8 M -20	56	10F	St	2012	50	142.60	141.23	148	32	110	-	4	2.50
T 35430	TL 64 -8 M -20	64	11F	St	2012	50	162.97	161.60	168	32	110	137	4	2.60
T 35431	TL 72 -8 M -20	72	11F	St	2012	50	183.35	181.97	192	32	110	158	4	3.40
T 35434	TL 80 -8 M -20	80	11	GG	2012	50	203.72	202.35	-	32	110	180	4	3.60
T 35437	TL 90 -8 M -20	90	11	GG	2012	50	229.18	227.81	-	32	110	204	4	4.10

## Pre šírku reme a 30 mm

T 35459	TL 22 -8 M -30	22	16F	St	1008	25	56.02	54.65	60	22	-	37	16	0.33
T 35460	TL 24 -8 M -30	24	16F	St	1108	28	61.11	59.74	66	22	-	44	16	0.40
T 35461	TL 26 -8 M -30	26	16F	St	1108	28	66.21	64.84	71	22	-	44	16	0.45
T 35462	TL 28 -8 M -30	28	16F	St	1210	32	71.30	70.08	75	25	-	50	13	0.50
T 35463	TL 30 -8 M -30	30	15F	St	1615	42	76.39	75.13	83	38	-	-	-	0.55
T 35464	TL 32 -8 M -30	32	15F	St	1615	42	81.49	80.16	87	38	-	-	-	0.60
T 35465	TL 34 -8 M -30	34	15F	St	1615	42	86.58	85.21	91	38	-	-	-	0.80
T 35466	TL 36 -8 M -30	36	15F	St	1615	42	91.67	90.30	98	38	-	-	-	1.00
T 35467	TL 38 -8 M -30	38	15F	St	1615	42	96.77	95.39	103	38	-	-	-	1.10
T 35470	TL 40 -8 M -30	40	15F	St	1615	42	101.86	100.49	106	38	-	-	-	1.34
T 35472	TL 44 -8 M -30	44	18F	St	2012	50	112.05	110.67	119	32	-	86	3	1.30
T 35473	TL 48 -8 M -30	48	18F	St	2012	50	122.23	120.86	127	32	-	90	3	1.80
T 35476	TL 56 -8 M -30	56	18F	St	2012	50	142.60	141.23	148	32	-	110	3	3.80
T 35479	TL 64 -8 M -30	64	10F	St	2517	60	162.97	161.60	168	45	125	-	7	4.30
T 35482	TL 72 -8 M -30	72	11F	St	2517	60	183.35	181.97	192	45	125	158	7	4.40
T 35484	TL 80 -8 M -30	80	11	GG	2517	60	203.72	202.35	-	45	125	180	7	4.65
T 35488	TL 90 -8 M -30	90	11	GG	2517	60	229.18	227.81	-	45	125	204	7	5.80
T 35491	TL 112 -8 M -30	112	12	GG	2517	60	285.21	283.83	-	45	125	254	7	6.20
T 35494	TL 144 -8 M -30	144	12	GG	2517	60	366.69	365.32	-	45	125	336	7	9.00

Šírka remene	20 mm	30 mm
F	28	38

### Info:


St = Oce

GG = Šedá liatina

# Ozubené remenice HTD 8 M pre Taper Lock®

Rozteč 8 mm

vi .nižšie

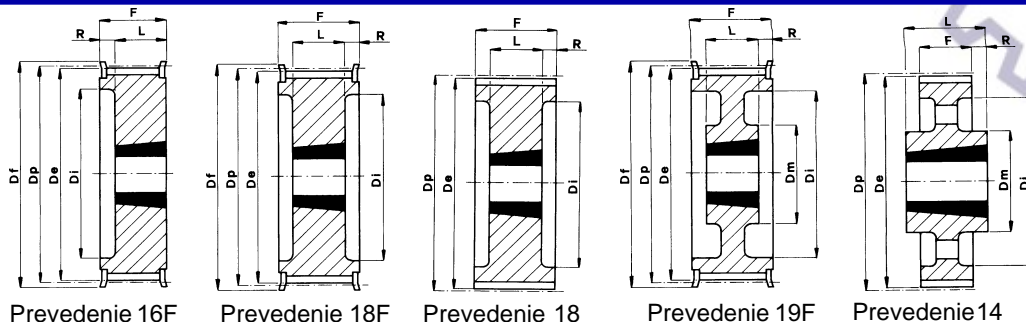

## Pre šírku reme a 50 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Púzdro Taper Lock®	Max. Ø hriade a	Ø Dp	Ø De	Ø Df	F	L	Di	R	kg
T 35440	TL 28-8 M-50	28	16F	St	1210	32	71.30	70.08	75	25	-	50	35.0	0.60
T 35442	TL 30-8 M-50	30	16F	St	1615	42	76.39	75.13	83	38	-	58	22.0	0.65
T 35443	TL 32-8 M-50	32	16F	St	1615	42	81.49	80.16	87	38	-	63	22.0	0.80
T 35444	TL 34-8 M-50	34	16F	St	1615	42	86.58	85.21	91	38	-	65	22.0	1.08
T 35445	TL 36-8 M-50	36	16F	St	1615	42	91.67	90.30	98	38	-	68	22.0	1.35
T 35446	TL 38-8 M-50	38	16F	St	1615	42	96.77	95.39	103	38	-	72	22.0	1.65
T 35447	TL 40-8 M-50	40	18F	St	2012	50	101.86	100.49	106	32	-	80	14.0	1.70
T 35448	TL 44-8 M-50	44	18F	St	2012	50	112.05	110.67	119	32	-	86	14.0	1.80
T 35449	TL 48-8 M-50	48	18F	St	2012	50	122.23	120.86	127	32	-	95	14.0	2.35
T 35450	TL 56-8 M-50	56	18F	St	2517	60	142.60	141.23	148	45	-	116	7.5	3.35
T 35451	TL 64-8 M-50	64	18F	St	2517	60	162.97	161.60	168	45	-	136	7.5	4.90
T 35452	TL 72-8 M-50	72	19F	St	2517	60	183.35	181.97	192	45	125	158	7.5	6.90
T 35453	TL 80-8 M-50	80	18	GG	3020	75	203.72	202.35	-	51	-	180	4.5	8.90
T 35454	TL 90-8 M-50	90	19	GG	3020	75	229.18	227.81	-	51	160	204	4.5	9.90
T 35455	TL 112-8 M-50	112	19	GG	3020	75	285.21	283.83	-	51	170	254	4.5	12.10
T 35456	TL 144-8 M-50	144	20	GG	3020	75	366.69	365.32	-	51	170	336	4.5	15.40
T 35457	TL 168-8 M-50	168	14	GG	3525	90	427.81	426.44	-	65	198	395	2.5	18.00
T 35458	TL 192-8 M-50	192	14	GG	3525	90	488.92	487.55	-	65	198	455	2.5	25.00

## Pre šírku reme a 85 mm


T 35497	TL 34-8 M-85	34	18F	St	1615	42	86.58	85.22	91	38	-	65	28.5	1.50
T 35498	TL 36-8 M-85	36	18F	St	1615	42	91.67	90.30	98	38	-	68	28.5	1.90
T 35500	TL 38-8 M-85	38	18F	St	1615	42	96.77	95.39	103	38	-	72	28.5	2.20
T 35501	TL 40-8 M-85	40	18F	St	2012	50	101.86	100.49	106	32	-	80	31.5	1.90
T 35502	TL 44-8 M-85	44	18F	St	2012	50	112.05	110.67	119	32	-	86	31.5	2.30
T 35504	TL 48-8 M-85	48	18F	St	2517	60	122.23	120.86	127	45	-	97	25.0	2.70
T 35506	TL 56-8 M-85	56	18F	St	2517	60	142.60	141.23	148	45	-	116	25.0	4.50
T 35509	TL 64-8 M-85	64	18F	St	2517	60	162.97	161.60	168	45	-	136	25.0	6.30
T 35512	TL 72-8 M-85	72	18F	St	3020	75	183.35	181.97	192	51	-	150	22.0	8.10
T 35515	TL 80-8 M-85	80	18	GG	3020	75	203.72	202.35	-	51	-	180	22.0	10.20
T 35517	TL 90-8 M-85	90	19	GG	3020	75	229.18	227.81	-	51	-	204	22.0	11.20
T 35520	TL 112-8 M-85	112	19	GG	3020	75	285.21	283.83	-	51	170	254	22.0	15.00

Šírka remene	50 mm	85 mm
F	60	95


# Ozubené remenice HTD 14 M pre Taper Lock®

Rozteč 14 mm


vi .nižšie




Prevedenie 18F



Prevedenie 19F



Prevedenie 19



Prevedenie 20

## Pre šírku reme a 40 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Púzdro Taper Lock®	Max. Ø hriade a	Ø Dp	Ø De	Ø Df	F	L	Di	R	kg
T 35168	TL 28 -14 M -40	28	18F	St	2012	50	124.78	122.12	127	32	-	94	11.0	2.10
T 35170	TL 30 -14 M -40	30	18F	St	2012	50	133.69	130.99	138	32	-	98	11.0	2.70
T 35172	TL 32 -14 M -40	32	18F	St	2012	50	142.60	139.88	154	32	-	108	11.0	3.40
T 36291	TL 34 -14 M -40	34	18F	St	2517	60	151.52	148.79	160	45	-	110	4.5	3.90
T 35174	TL 36 -14 M -40	36	18F	St	2517	60	160.43	157.68	168	45	-	120	4.5	4.80
T 35175	TL 38 -14 M -40	38	18F	St	2517	60	169.34	166.60	183	45	-	130	4.5	5.40
T 35176	TL 40 -14 M -40	40	18F	St	2517	60	178.25	175.49	188	45	-	138	4.5	6.00
T 35185	TL 72 -14 M -40	72	19	GG	3020	75	320.86	318.06	-	51	170	280	1.5	15.00
T 35186	TL 80 -14 M -40	80	20	GG	3020	75	356.51	353.71	-	51	170	315	1.5	16.00
T 35188	TL 90 -14 M -40	90	20	GG	3020	75	401.07	398.28	-	51	170	360	1.5	18.00
T 35189	TL 112 -14 M -40	112	20	GG	3020	75	499.11	496.32	-	51	170	457	1.5	25.50
T 35191	TL 144 -14 M -40	144	20	GG	3020	75	641.71	638.92	-	51	170	600	1.5	32.00
T 35193	TL 168 -14 M -40	168	20	GG	3020	75	748.66	745.87	-	51	170	706	1.5	43.50
T 35195	TL 192 -14 M -40	192	20	GG	3020	75	855.62	852.82	-	51	170	813	1.5	49.50

## Pre šírku reme a 55 mm

T 35250	TL 28 -14 M -55	28	18F	St	2012	50	124.78	122.12	127	32	-	94	19.0	2.20
T 35252	TL 30 -14 M -55	30	18F	St	2517	60	133.69	130.99	138	45	-	100	12.5	2.70
T 35253	TL 32 -14 M -55	32	18F	St	2517	60	142.60	139.88	154	45	-	108	12.5	3.60
T 35254	TL 34 -14 M -55	34	18F	St	2517	60	151.52	148.79	160	45	-	110	12.5	4.50
T 35255	TL 36 -14 M -55	36	18F	St	2517	60	160.43	157.68	168	45	-	120	12.5	5.20
T 35256	TL 38 -14 M -55	38	18F	St	2517	60	169.34	166.60	183	45	-	130	12.5	6.20
T 35257	TL 40 -14 M -55	40	18F	St	2517	60	178.25	175.49	188	45	-	138	12.5	6.90
T 35258	TL 44 -14 M -55	44	18F	St	3020	75	196.08	193.28	211	51	-	155	9.5	8.60
T 35259	TL 48 -14 M -55	48	18F	St	3020	75	213.90	211.11	226	51	-	170	9.5	10.50
T 35260	TL 56 -14 M -55	56	18F	GG	3020	75	249.55	246.76	256	51	170	208	9.5	13.50
T 35261	TL 64 -14 M -55	64	19F	GG	3020	75	285.21	282.41	296	51	170	240	9.5	14.50
T 35262	TL 72 -14 M -55	72	19	GG	3020	75	320.86	318.06	-	51	170	280	9.5	16.30
T 35263	TL 80 -14 M -55	80	20	GG	3020	75	356.51	353.71	-	51	170	315	9.5	17.50
T 35264	TL 90 -14 M -55	90	20	GG	3020	75	401.07	398.28	-	51	170	360	9.5	20.00
T 35265	TL 112 -14 M -55	112	20	GG	3020	75	499.11	496.32	-	51	170	457	9.5	28.20
T 35266	TL 144 -14 M -55	144	20	GG	3020	75	641.71	638.92	-	51	170	600	9.5	36.00
T 35267	TL 168 -14 M -55	168	20	GG	3020	75	748.66	745.87	-	51	170	706	9.5	48.50
T 35268	TL 192 -14 M -55	192	20	GG	3020	75	855.62	852.82	-	51	170	813	9.5	52.00

Šírka remene	40 mm	55 mm
F	54	70

### Info:

St = Oce


GG = Šedá liatina




# Ozubené remenice HTD 14 M pre Taper Lock®

Rozteč 14 mm


vi .nižšie




Prevedenie 18F




Prevedenie 19F



Prevedenie 19



Prevedenie 20



Prevedenie 22

## Pre šírku reme a 85 mm

Obj. číslo	Oznaenie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- de a	Ø Dp	Ø De	Ø Df	F	L	Di	R	kg
T 35217	TL 28 -14 M -85	28	18F	St	2517	60	124.78	122.12	127	45	-	98	28.5	2.70
T 35219	TL 30 -14 M -85	30	18F	St	2517	60	133.69	130.99	138	45	-	100	28.5	3.80
T 35220	TL 32 -14 M -85	32	18F	St	2517	60	142.60	139.88	154	45	-	108	28.5	4.70
T 35630	TL 34 -14 M -85	34	18F	St	2517	60	151.52	148.79	160	45	-	110	28.5	6.00
T 35221	TL 36 -14 M -85	36	18F	St	3020	75	160.43	157.68	168	51	-	125	25.5	5.70
T 35223	TL 38 -14 M -85	38	18F	St	3020	75	169.34	166.60	183	51	-	130	25.5	6.80
T 35222	TL 40 -14 M -85	40	18F	St	3020	75	178.25	175.49	188	51	-	138	25.5	8.00
T 35224	TL 44 -14 M -85	44	18F	St	3030	75	196.08	193.28	211	76	-	155	13.0	11.70
T 35225	TL 48 -14 M -85	48	18F	St	3030	75	213.90	211.11	226	76	-	170	13.0	15.00
T 35226	TL 56 -14 M -85	56	18F	GG	3525	90	249.55	246.76	256	65	-	210	18.5	19.00
T 35227	TL 64 -14 M -85	64	19F	GG	3525	90	285.21	282.41	296	65	190	240	18.5	23.50
T 35228	TL 72 -14 M -85	72	19	GG	3525	90	320.86	318.06	-	65	190	280	18.5	25.00
T 35229	TL 80 -14 M -85	80	20	GG	3525	90	356.51	353.71	-	65	190	315	18.5	26.00
T 35230	TL 90 -14 M -85	90	20	GG	3525	90	401.07	398.28	-	65	190	360	18.5	28.00
T 35231	TL 112 -14 M -85	112	20	GG	3525	90	499.11	496.32	-	65	190	457	18.5	36.00
T 35232	TL 144 -14 M -85	144	20	GG	3525	90	641.71	638.92	-	65	190	600	18.5	48.00
T 35233	TL 168 -14 M -85	168	20	GG	3525	90	748.66	745.87	-	65	190	706	18.5	60.00
T 35234	TL 192 -14 M -85	192	22	GG	4040	100	855.62	852.82	-	102	230	813	-	85.00

## Pre šírku reme a 115 mm

T 35270	TL 28 -14 M -115	28	18F	St	2517	60	124.78	122.12	127	45	-	98	44.0	3.80
T 35272	TL 30 -14 M -115	30	18F	St	2517	60	133.69	130.99	138	45	-	100	44.0	5.00
T 35273	TL 32 -14 M -115	32	18F	St	2517	60	142.60	139.88	154	45	-	108	44.0	6.80
T 35274	TL 34 -14 M -115	34	18F	St	2517	60	151.52	148.79	160	45	-	110	44.0	6.90
T 35275	TL 36 -14 M -115	36	18F	St	3020	75	160.43	157.68	168	51	-	125	41.0	7.00
T 35276	TL 38 -14 M -115	38	18F	St	3020	75	169.34	166.60	183	51	-	130	41.0	8.50
T 35277	TL 40 -14 M -115	40	18F	St	3020	75	178.25	175.49	188	51	-	138	41.0	9.10
T 35283	TL 80 -14 M -115	80	20	GG	3535	90	356.51	353.71	-	89	190	315	22.0	32.00
T 35284	TL 90 -14 M -115	90	20	GG	3535	90	401.07	398.28	-	89	190	360	22.0	37.00
T 35285	TL 112 -14 M -115	112	20	GG	3535	90	499.11	496.32	-	89	190	457	22.0	45.00
T 35287	TL 168 -14 M -115	168	20	GG	4040	100	748.66	745.87	-	102	230	706	15.5	-
T 35288	TL 192 -14 M -115	192	22	GG	4040	100	855.62	852.82	-	102	230	813	15.5	95.00

Šírka remene	85 mm	115 mm
F	102	133

### Info:


St = Oce

GG = Šedá liatina


# Ozubené remenice 8M Poly Chain® GT

Rozteč 8 mm pre Taper Lock®


vi .nižšie




Prevedenie 1F




Prevedenie 2F



Prevedenie 2



Prevedenie 3F



Prevedenie 9

## Pre šírku reme a 12 mm

Obj. číslo	Oznaenie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- dele	Výpoč- tový Ø	Ø	Ø cez bočnice	B	E	F	L	kg
T 63200	8M -22S -12*	22	1F	St	-	28*	56.02	54.42	62	43	10	20	30	0.42
T 63183	8M -25S -12	25	2F	St	1108	28	63.66	62.06	70	49	2	20	22	0.43
T 63184	8M -28S -12	28	2F	St	1108	28	71.30	69.70	79	59	5	20	25	0.60
T 63185	8M -30S -12	30	2F	St	1210	32	76.39	74.79	86	66	5	20	25	0.67
T 63186	8M -32S -12	32	2F	St	1610	42	81.49	79.89	90	66	5	20	25	0.77
T 63187	8M -34S -12	34	2F	St	1610	42	86.58	84.98	95	70	5	20	25	0.88
T 63188	8M -36S -12	36	2F	St	1610	42	91.67	90.07	98	78	5	20	25	1.02
T 63189	8M -38S -12	38	2F	St	1610	42	96.77	95.17	106	80	5	20	25	1.15
T 63190	8M -40S -12	40	2F	GG	1610	42	101.86	100.26	111	85	5	20	25	1.19
T 63191	8M -45S -12	45	2F	GG	2012	50	114.59	112.99	119	92	12	20	32	1.76
T 63192	8M -48S -12	48	2F	GG	2012	50	122.23	120.63	135	104	12	20	32	2.16
T 63193	8M -50S -12	50	2F	GG	2012	50	127.32	125.72	135	104	12	20	32	2.28
T 63194	8M -56S -12	56	2F	GG	2012	50	142.60	141.00	151	104	12	20	32	2.83
T 63195	8M -60S -12	60	2F	GG	2012	50	152.79	151.19	159	111	12	20	32	3.24
T 63196	8M -64S -12	64	2F	GG	2012	50	162.97	161.37	168	111	12	20	32	3.51
T 63197	8M -75S -12	75	2	GG	2012	50	190.99	189.39	-	111	12	20	32	4.57
T 63198	8M -80S -12	80	2	GG	2012	50	203.72	202.12	-	111	12	20	32	5.13
T 63199	8M -90S -12	90	2	GG	2012	50	229.18	227.58	-	111	12	20	32	6.37

## Pre šírku reme a 21 mm

T 63220	8M - 22S -21*	22	1F	St	-	28*	56.02	54.42	62	43	12	30	42	0.57
T 63201	8M - 25S -21	25	3F	St	1108	28	63.66	62.06	70	-	-	30	22	0.60
T 63202	8M - 28S -21	28	3F	St	1210	32	71.30	69.70	79	-	-	30	25	0.75
T 63203	8M - 30S -21	30	3F	St	1210	32	76.39	74.79	86	-	-	30	25	0.83
T 63204	8M - 32S -21	32	3F	St	1610	42	81.49	79.89	90	-	-	30	25	0.97
T 63205	8M - 34S -21	34	3F	St	1610	42	86.58	84.98	95	-	-	30	25	1.12
T 63206	8M - 36S -21	36	3F	St	1610	42	91.67	90.07	98	-	-	30	25	1.29
T 63207	8M - 38S -21	38	3F	St	1610	42	96.77	95.17	106	-	-	30	25	1.34
T 63208	8M - 40S -21	40	3F	GG	1610	42	101.86	100.26	111	-	-	30	25	1.50
T 63209	8M - 45S -21	45	2F	GG	2012	50	114.59	112.99	119	104	2	30	32	2.03
T 63210	8M - 48S -21	48	2F	GG	2012	50	122.23	120.63	135	104	2	30	32	2.24
T 63211	8M - 50S -21	50	2F	GG	2012	50	127.32	125.72	135	111	2	30	32	2.42
T 63212	8M - 56S -21	56	2F	GG	2012	50	142.60	141.00	151	111	2	30	32	3.20
T 63213	8M - 60S -21	60	2F	GG	2517	60	152.79	151.19	159	124	15	30	45	4.66
T 63214	8M - 64S -21	64	2F	GG	2517	60	162.97	161.37	168	124	15	30	45	5.28
T 63215	8M - 75S -21	75	2	GG	2517	60	190.99	189.39	-	124	15	30	45	6.77
T 63216	8M - 80S -21	80	2	GG	2517	60	203.72	202.12	-	124	15	30	45	7.61
T 63217	8M - 90S -21	90	9	GG	2517	60	229.18	227.58	-	124	-	30	45	8.57
T 63218	8M -112S -21	112	9	GG	2517	60	285.21	283.61	-	124	-	30	45	12.50
T 63219	8M -140S -21	140	10	GG	3020	75	356.51	354.91	-	150	-	30	51	12.79

### Info:

St = Ocel

GG = Šedá liatina


St = Ocel / GG = Šedá liatina

\* = DIN 6885T3

# Ozubené remenice 8M Poly Chain® GT

Rozteč 8 mm pre Taper Lock®

vi nižšie

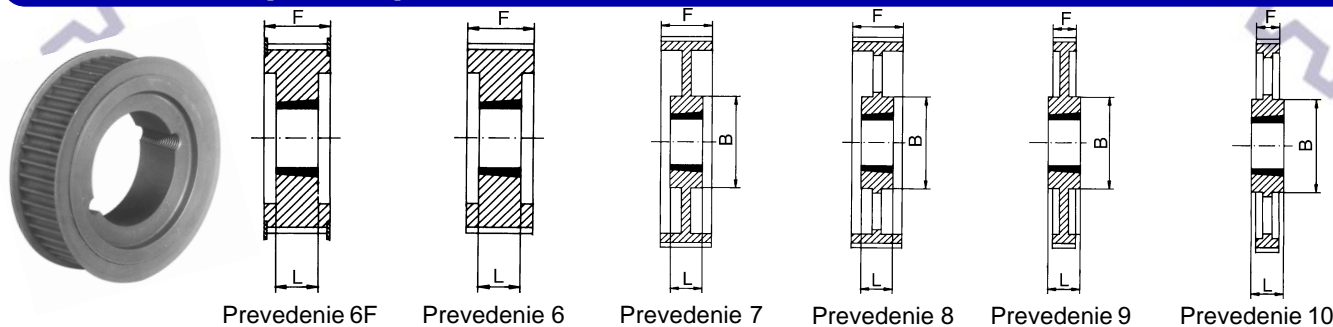

## Pre šírku reme a 36 mm

Obj. číslo	Oznaenie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- dele	Výpoč- tový Ø	Ø	Øcez bočnice	B	E	F	L	kg
T 63248	8M - 25S -36•	25	1F	St	-	32	63.66	62.06	70	49	10	45	55	1.02
T 63228	8M - 28S -36	28	3F	St	1210	32	71.30	69.70	79	-	-	45	25	1.11
T 63229	8M - 30S -36	30	3F	St	1610	42	76.39	74.79	86	-	-	45	25	1.22
T 63230	8M - 32S -36	32	3F	St	1610	42	81.49	79.89	90	-	-	45	25	1.45
T 63231	8M - 34S -36	34	3F	St	1610	42	86.58	84.98	95	-	-	45	25	1.66
T 63232	8M - 36S -36	36	3F	St	1610	42	81.67	90.07	98	-	-	45	25	1.90
T 63233	8M - 38S -36	38	3F	St	1610	42	96.77	95.17	106	-	-	45	25	2.21
T 63234	8M - 40S -36	40	3F	St	2012	50	101.86	100.26	111	-	-	45	32	2.36
T 63235	8M - 45S -36	45	3F	St	2012	50	114.59	112.99	119	-	-	45	32	3.07
T 63236	8M - 48S -36	48	3F	GG	2012	50	122.23	120.63	135	-	-	45	32	3.30
T 63237	8M - 50S -36	50	3F	GG	2012	50	127.32	125.72	135	-	-	45	32	3.58
T 63238	8M - 56S -36	56	3F	GG	2517	60	142.60	141.00	151	-	-	45	45	4.48
T 63239	8M - 60S -36	60	3F	GG	2517	60	152.79	151.19	159	-	-	45	45	5.30
T 63240	8M - 64S -36	64	3F	GG	2517	60	162.97	161.37	168	-	-	45	45	6.19
T 63241	8M - 75S -36	75	2	GG	3020	75	190.99	189.39	-	150	6	45	51	8.72
T 63242	8M - 80S -36	80	2	GG	3020	75	203.72	202.12	-	150	6	45	51	9.96
T 63243	8M - 90S -36	90	9	GG	3020	75	229.18	227.58	-	150	-	45	51	10.41
T 63244	8M -112S -36	112	9	GG	3020	75	285.21	283.61	-	150	-	45	51	14.01
T 63245	8M -140S -36	140	10	GG	3020	75	356.51	354.91	-	150	-	45	51	11.98
T 63246	8M -168S -36	168	10	GG	3525	100	427.81	426.21	-	198	-	45	65	23.91
T 63247	8M -192S -36	192	10	GG	3525	100	488.92	487.32	-	198	-	45	65	26.53

## Pre šírku reme a 62 mm

T 63266	8M - 30S -62•	30	1F	St	-	42	76.39	74.79	86	65	12	72	84	2.45
T 63267	8M - 32S -62•	32	1F	St	-	50*	81.49	79.89	90	69	12	72	84	2.82
T 63268	8M - 34S -62•	34	1F	St	-	55*	86.58	84.98	95	74	12	72	84	3.17
T 63269	8M - 36S -62•	36	1F	St	-	60*	91.67	90.07	98	77	12	72	84	3.52
T 63270	8M - 38S -62•	38	1F	St	-	60	96.77	95.17	106	84	12	72	84	3.91
T 63252	8M - 40S -62	40	3F	St	2012	50	101.86	100.26	111	-	-	72	32	3.76
T 63253	8M - 45S -62	45	3F	St	2012	50	114.59	112.99	119	-	-	72	32	4.88
T 63254	8M - 48S -62	48	3F	St	2517	60	122.23	120.63	135	-	-	72	45	5.52
T 63255	8M - 50S -62	50	3F	St	2517	60	127.32	125.72	135	-	-	72	45	6.03
T 63256	8M - 56S -62	56	6F	GG	2517	60	142.60	141.00	151	-	-	72	45	5.43
T 63257	8M - 60S -62	60	6F	GG	2517	60	152.79	151.19	159	-	-	72	45	6.33
T 63258	8M - 64S -62	64	6F	GG	2517	60	162.97	161.37	168	-	-	72	45	7.11
T 63259	8M - 75S -62	75	6	GG	3020	75	190.99	189.39	-	-	-	72	51	9.99
T 63260	8M - 80S -62	80	6	GG	3020	75	203.72	202.12	-	-	-	72	51	11.44
T 63261	8M - 90S -62	90	6	GG	3020	75	229.18	227.58	-	-	-	72	51	14.94
T 63262	8M -112S -62	112	7	GG	3020	75	285.21	283.61	-	150	-	72	51	14.94
T 63263	8M -140S -62	140	7	GG	3525	100	356.51	354.91	-	198	-	72	65	24.77
T 63264	8M -168S -62	168	8	GG	3525	100	427.81	426.21	-	198	-	72	65	28.39
T 63265	8M -192S -62	192	8	GG	3525	100	488.92	487.32	-	198	-	72	65	32.18

### Info:


St = Oce  
GG = Šedá liatina

• = S predv tanou dierou  
\* = DIN 6885T3


# Ozubené remenice 14M Poly Chain® GT

Rozteč 14 mm pre Taper Lock®


vi .nižšie




Prevedenie 3F




Prevedenie 2F



Prevedenie 9F



Prevedenie 10



Prevedenie 7F

## Pre šírku reme a 20 mm

Obj. číslo	Ozna enie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- dele	Výpoč- tový Ø	Ø	Øcez bočnice	B	E	F	L	kg
T 63289	14M - 28S -20	28	3F	GG	2012	50	124.78	121.98	141	-	-	33	32	2.46
T 63290	14M - 30S -20	30	3F	GG	2012	50	133.69	130.89	141	-	-	33	32	2.85
T 63291	14M - 32S -20	32	3F	GG	2012	50	142.60	139.80	155	-	-	33	32	3.26
T 63292	14M - 34S -20	34	2F	GG	2517	60	151.52	148.72	169	117	12	33	45	4.35
T 63293	14M - 36S -20	36	2F	GG	2517	60	160.43	157.63	169	117	12	33	45	5.05
T 63294	14M - 38S -20	38	2F	GG	2517	60	169.34	166.54	183	117	12	33	45	5.39
T 63295	14M - 40S -20	40	2F	GG	2517	60	178.25	175.45	197	117	12	33	45	5.97
T 63296	14M - 44S -20	44	2F	GG	3020	75	196.08	193.28	211	144	18	33	51	8.03
T 63297	14M - 48S -20	48	2F	GG	3020	75	213.90	211.11	226	144	18	33	51	9.48
T 63298	14M - 50S -20	50	2F	GG	3020	75	222.82	220.02	239	144	18	33	51	10.13
T 63299	14M - 56S -20	56	9F	GG	3020	75	249.55	246.76	267	144	-	33	51	10.81
T 63300	14M - 60S -20	60	9	GG	3020	75	267.38	264.58	-	159	-	33	51	12.59
T 63301	14M - 64S -20	64	9	GG	3020	75	285.21	282.41	-	159	-	33	51	13.84
T 63302	14M - 72S -20	72	9	GG	3020	75	320.86	318.06	-	159	-	33	51	15.51
T 63303	14M - 80S -20	80	9	GG	3020	75	356.51	353.71	-	159	-	33	51	18.13
T 63304	14M - 90S -20	90	10	GG	3020	75	401.07	398.27	-	159	-	33	51	19.47
T 63305	14M -112S -20	112	10	GG	3020	75	499.11	496.31	-	159	-	33	51	24.25
T 63306	14M -140S -20	140	10	GG	3020	75	623.89	621.09	-	159	-	33	51	20.96

## Pre šírku reme a 37 mm

T 63307	14M - 28S -37	28	5F	GG	2012	50	124.78	121.98	141	-	-	51	32	2.97
T 63308	14M - 30S -37	30	6F	GG	2517	60	133.69	130.89	141	-	-	51	45	3.81
T 63309	14M - 32S -37	32	6F	GG	2517	60	142.60	139.80	155	-	-	51	45	4.53
T 63310	14M - 34S -37	34	6F	GG	2517	60	151.52	148.72	162	-	-	51	45	5.06
T 63311	14M - 36S -37	36	5F	GG	2517	60	160.43	157.63	168	-	-	51	45	5.92
T 63312	14M - 38S -37	38	5F	GG	2517	60	169.34	166.54	183	-	-	51	45	6.51
T 63313	14M - 40S -37	40	5F	GG	2517	60	178.25	175.45	197	-	-	51	45	7.31
T 63314	14M - 44S -37	44	3F	GG	3020	75	196.08	193.28	211	-	-	51	51	9.44
T 63315	14M - 48S -37	48	3F	GG	3020	75	213.90	211.11	226	-	-	51	51	11.44
T 63316	14M - 50S -37	50	3F	GG	3020	75	222.82	220.02	239	-	-	51	51	12.62
T 63317	14M - 56S -37	56	7F	GG	3020	75	249.55	246.76	267	144	-	51	51	12.70
T 63318	14M - 60S -37	60	7	GG	3020	75	267.38	264.58	-	159	-	51	51	14.23
T 63319	14M - 64S -37	64	7	GG	3020	75	285.21	282.41	-	159	-	51	51	15.58
T 63320	14M - 72S -37	72	7	GG	3020	75	320.86	318.06	-	159	-	51	51	17.24
T 63321	14M - 80S -37	80	7	GG	3020	75	356.51	353.71	-	159	-	51	51	20.32
T 63322	14M - 90S -37	90	8	GG	3020	75	401.07	398.27	-	159	-	51	51	29.85
T 63323	14M -112S -37	112	8	GG	3020	75	499.11	496.31	-	159	-	51	51	27.43
T 63324	14M -140S -37	140	10	GG	3525	100	623.89	621.09	-	206	-	51	65	33.55
T 63325	14M -168S -37	168	10	GG	3525	100	748.66	745.87	-	206	-	51	65	64.50
T 63326	14M -192S -37	192	10	GG	4030	115	855.61	852.82	-	215	-	51	76	83.82

### Info:

St = Oce


GG = Šedá liatina



# Ozubené remenice 14M Poly Chain® GT

Rozteč 14 mm pre Taper Lock®

viššie  
nižšie

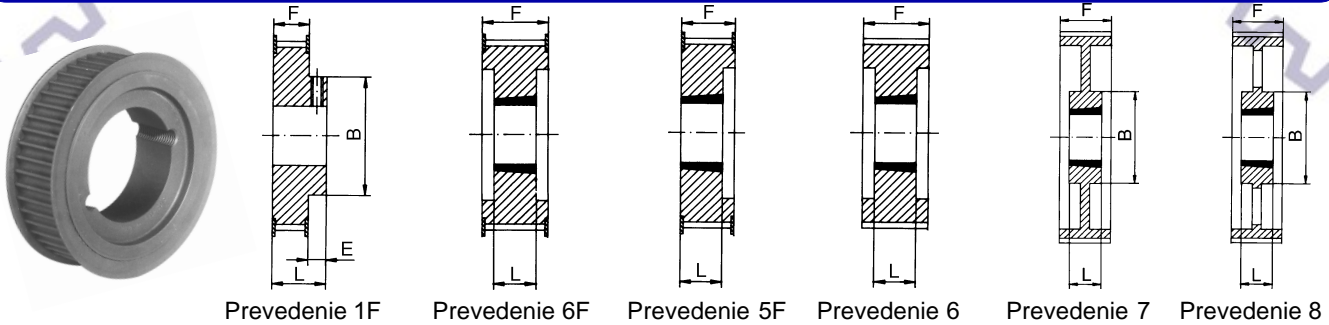

## Pre šírku reme a 68 mm

Obj. číslo	Oznaenie	zubov	Prevedenie	Materiál	Púzdro Taper Lock®	Max. Ø hriadele	Výpočtový Ø	Ø	Øcezbočnice	B	E	F	L	kg
T 63341	14M - 34S -68•	34	1F	St	-	100	151.52	148.72	169	134	20	84	104	6.25
T 63342	14M - 36S -68•	36	1F	St	-	100	160.43	157.63	169	134	20	84	104	6.68
T 63343	14M - 38S -68•	38	1F	St	-	115*	169.34	166.54	183	147	20	84	104	7.46
T 63344	14M - 40S -68•	40	1F	St	-	125*	178.25	175.45	197	156	20	84	104	7.81
T 63328	14M - 44S -68	44	6F	GG	3020	75	196.08	193.28	211	-	-	84	51	11.54
T 63329	14M - 48S -68	48	5F	GG	3020	75	213.90	211.11	226	-	-	84	51	13.74
T 63330	14M - 50S -68	50	6F	GG	3525	100	222.82	220.02	239	-	-	84	65	16.63
T 63331	14M - 56S -68	56	6F	GG	3525	100	249.55	246.76	267	-	-	84	65	21.15
T 63332	14M - 60S -68	60	6	GG	3525	100	267.38	264.58	-	-	-	84	65	24.28
T 63333	14M - 64S -68	64	6	GG	3525	100	285.21	282.41	-	-	-	84	65	27.86
T 63334	14M - 72S -68	72	7	GG	3525	100	320.86	318.06	-	178	-	84	65	25.74
T 63335	14M - 80S -68	80	7	GG	3525	100	356.51	353.71	-	178	-	84	65	29.86
T 63336	14M - 90S -68	90	8	GG	3525	100	401.07	398.27	-	178	-	84	65	31.24
T 63337	14M -112S -68	112	8	GG	3525	100	499.11	496.31	-	178	-	84	65	39.25
T 63338	14M -140S -68	140	8	GG	3525	100	623.89	621.09	-	206	-	84	65	40.87
T 63339	14M -168S -68	168	8	GG	3525	100	748.66	745.87	-	206	-	84	65	73.30
T 63340	14M -192S -68	192	8	GG	4030	115	855.61	852.82	-	215	-	84	76	94.21

## Pre šírku reme a 90 mm

T 63357	14M - 36S -90•	36	1F	St	-	110	160.43	157.63	168	141	30	106	136	8.15
T 63358	14M - 38S -90•	38	1F	St	-	115	169.34	166.54	183	147	30	106	136	9.73
T 63359	14M - 40S -90•	40	1F	St	-	125	178.25	175.45	197	156	30	106	136	10.29
T 63360	14M - 44S -90•	44	1F	St	-	140	196.08	193.28	211	185	30	106	136	11.92
T 63345	14M - 48S -90	48	6F	GG	3525	100	213.90	211.11	226	-	-	106	66	16.76
T 63346	14M - 50S -90	50	6F	GG	3525	100	222.82	220.02	239	-	-	106	66	18.38
T 63347	14M - 56S -90	56	6F	GG	3525	100	249.55	246.76	267	-	-	106	66	23.46
T 63348	14M - 60S -90	60	6	GG	3525	100	267.38	264.58	-	-	-	106	66	26.53
T 63349	14M - 64S -90	64	6	GG	3525	100	285.21	282.41	-	-	-	106	66	30.30
T 63350	14M - 72S -90	72	7	GG	3525	100	320.86	318.06	-	178	-	106	66	26.36
T 63351	14M - 80S -90	80	7	GG	4030	115	356.51	353.71	-	215	-	106	76	35.61
T 63352	14M - 90S -90	90	7	GG	4030	115	401.07	398.27	-	215	-	106	76	31.90
T 63353	14M -112S -90	112	8	GG	4535	125	499.11	496.31	-	215	-	106	90	70.89
T 63354	14M -140S -90	140	8	GG	4535	125	623.89	621.09	-	215	-	106	90	74.56
T 63355	14M -168S -90	168	8	GG	5040	130*	748.66	745.87	-	267	-	106	102	109.24
T 63356	14M -192S -90	192	8	GG	5040	130*	855.61	852.82	-	267	-	106	102	126.05

### Info:

St = Oce  
GG = Šedá liatina


• = S predv tanou dierou  
\* = DIN 6885T3




# Ozubené remenice 14M Poly Chain® GT

Rozteč 14 mm pre Taper Lock®


vi .nižšie




Prevedenie 1F




Prevedenie 6F



Prevedenie 6



Prevedenie 7



Prevedenie 8

## Pre šírku reme a 125 mm

Obj. číslo	Oznaenie	zubov	Preve- denie	Mate- riál	Púzdro Taper Lock®	Max. Ø hria- dele	Výpoč- tový Ø	Ø	Ø cez bočnice	B	E	F	L	kg
T 63374	14M - 38S -125•	38	1F	St	-	115*	169.34	166.54	183	147	20	141	161	11.74
T 63375	14M - 40S -125•	40	1F	St	-	125*	178.25	175.45	197	156	20	141	161	12.23
T 63376	14M - 44S -125•	44	1F	St	-	140*	196.08	193.28	211	170	20	141	161	14.46
T 63377	14M - 48S -125•	48	1F	St	-	160*	213.90	211.11	226	185	20	141	161	14.70
T 63363	14M - 50S -125	50	6F	GG	3525	100	222.82	220.02	239	-	-	141	65	20.93
T 63364	14M - 56S -125	56	6F	GG	3525	100	249.55	246.76	267	-	-	141	65	25.91
T 63365	14M - 60S -125	60	6	GG	4030	115	267.38	264.58	-	-	-	141	76	30.92
T 63366	14M - 64S -125	64	6	GG	4030	115	285.21	282.41	-	-	-	141	76	35.34
T 63367	14M - 72S -125	72	7	GG	4030	115	320.86	318.06	-	215	-	141	76	37.71
T 63368	14M - 80S -125	80	7	GG	4030	115	356.51	353.71	-	215	-	141	76	42.02
T 63369	14M - 90S -125	90	7	GG	4030	115	401.07	398.27	-	215	-	141	76	51.29
T 63370	14M -112S -125	112	8	GG	4535	125	499.11	496.31	-	215	-	141	89	65.64
T 63371	14M -140S -125	140	8	GG	4535	125	623.89	621.09	-	215	-	141	89	67.90
T 63372	14M -168S -125	168	8	GG	5040	125	748.87	745.87	-	267	-	141	102	120.66
T 63373	14M -192S -125	192	8	GG	5040	125	855.61	852.82	-	267	-	141	102	142.39



### Info:

St = Oce

GG = Šedá liatina

• = S predv tanou dierou

\* = DIN 6885T3

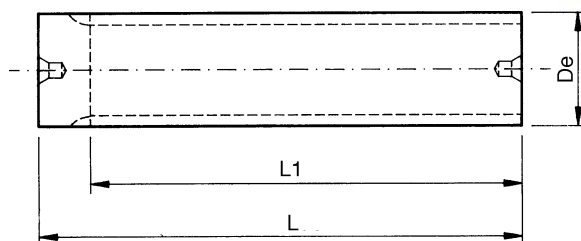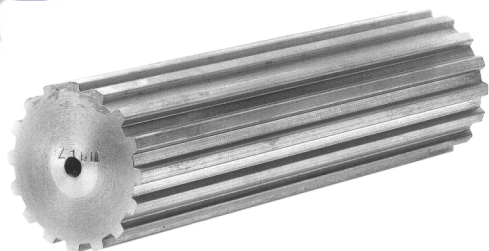

### Rozteč T2.5



Obj. číslo	zubov	Ø De	L	L1	Obj. číslo	zubov	Ø De	L	L1
T 40939	10	7.42	75	50	T 40958	32	24.95	140	140
T 40941	12	9.00	75	50	T 40959	34	26.55	140	140
T 40942	13	9.80	75	50	T 40960	35	27.35	140	140
T 40943	14	10.60	75	50	T 40961	36	28.10	140	140
T 40944	15	11.40	75	75	T 40962	38	29.70	140	140
T 40945	16	12.20	75	75	T 40963	40	31.30	140	140
T 40946	17	13.00	75	75	T 40964	42	32.90	140	140
T 40947	18	13.80	75	75	T 40965	44	34.50	140	140
T 40948	19	14.60	120	120	T 40966	45	35.30	140	140
T 40949	20	15.40	120	120	T 40967	48	37.70	140	140
T 40950	21	16.20	120	120	T 40968	50	39.29	160	160
T 40951	22	17.00	140	140	T 40969	60	47.25	160	160
T 40952	24	18.55	140	140	T 40970	65	51.20	160	160
T 40953	26	20.15	140	140	T 40971	70	55.20	160	160
T 40954	27	20.95	140	140	T 40972	72	56.80	160	160
T 40955	28	21.75	140	140	T 40973	90	71.12	160	160
T 40956	29	22.55	140	140	T 40974	100	79.08	160	160
T 40957	30	23.35	140	140					

### Rozteč T5

T 40975	10	15.05	140	140	T 41002	30	46.95	160	160
T 40976	11	16.65	140	140	T 41003	32	50.10	160	160
T 40977	12	18.25	140	140	T 41004	34	53.25	160	160
T 40978	13	19.85	140	140	T 41005	35	54.85	160	160
T 40979	14	21.45	140	140	T 41006	36	56.45	160	160
T 40980	15	23.05	140	140	T 41007	37	58.06	160	160
T 40981	16	24.60	140	140	T 41008	38	59.65	160	160
T 40982	17	26.20	140	140	T 41009	40	62.85	160	160
T 40983	18	27.80	140	140	T 41010	42	66.00	160	160
T 40984	19	29.40	140	140	T 41011	44	69.20	160	160
T 40985	20	31.00	160	160	T 41012	45	70.80	160	160
T 40986	21	32.70	160	160	T 41013	46	72.40	160	160
T 40987	22	34.25	160	160	T 41014	48	75.55	160	160
T 40988	23	35.85	160	160	T 41015	50	78.75	160	160
T 40989	24	37.40	160	160	T 41016	60	94.65	160	160
T 40990	25	38.95	160	160	T 41017	72	113.75	160	160
T 40998	26	40.60	160	160	T 41018	80	126.48	160	160
T 40999	27	42.20	160	160	T 41019	90	142.40	160	160
T 41000	28	43.75	160	160	T 41020	100	158.31	160	160
T 41001	29	45.35	160	160					



# Ozubené hriadele

Hliník

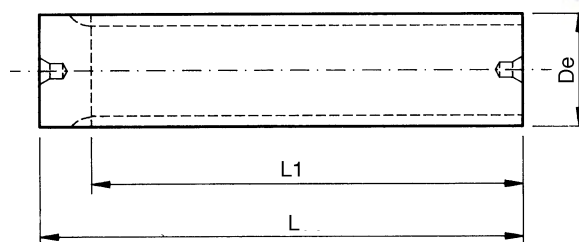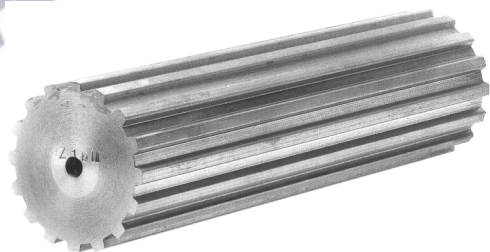

## Rozteč T10

Obj. číslo	zubov	Ø De	L	L1	Obj. číslo	zubov	Ø De	L	L1
T 41021	10	29.98	140	140	T 41037	24	74.55	160	160
T 41024	11	33.16	140	140	T 41038	26	80.90	160	160
T 41025	12	36.35	140	140	T 41039	28	87.25	160	160
T 41026	13	39.55	140	140	T 41040	30	93.65	160	160
T 41027	14	42.70	160	160	T 41041	32	100.00	160	160
T 41028	15	45.90	160	160	T 41042	34	106.40	160	160
T 41029	16	49.10	160	160	T 41043	36	112.75	160	160
T 41030	17	52.25	160	160	T 41044	38	119.10	160	160
T 41031	18	55.45	160	160	T 41045	40	125.45	160	160
T 41032	19	58.65	160	160	T 41046	45	141.40	160	160
T 41033	20	61.80	160	160	T 41047	48	150.95	160	160
T 41034	21	65.00	160	160	T 41048	60	189.15	160	160
T 41035	22	68.20	160	160	T 41049	72	227.29	160	160
T 41036	23	71.35	160	160					

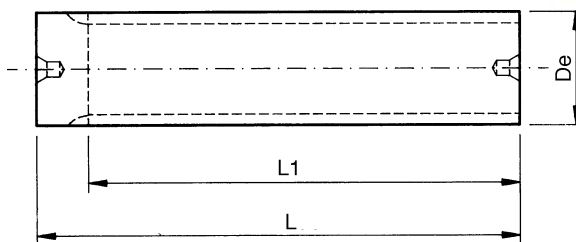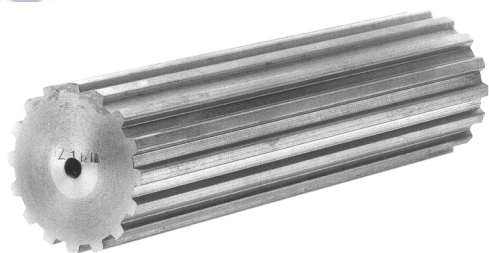

## Rozteč XL 1/5" (5.08 mm) materiál: hliník



Obj. číslo	zubov	Ø De	L	L1
T 41271	10	15.66	140	140
T 41272	11	17.28	140	140
T 41273	12	18.90	140	140
T 41274	13	20.51	140	140
T 41275	14	22.13	140	140
T 41277	15	23.75	140	140
T 41279	16	25.36	140	140
T 41280	17	26.98	140	140
T 41281	18	28.60	140	140
T 41282	19	30.22	140	140
T 41283	20	31.83	140	140
T 41284	21	33.45	160	160
T 41285	22	35.07	160	160
T 41286	23	36.60	160	160
T 41287	24	38.30	160	160
T 41288	25	39.92	160	160
T 41294	26	41.53	160	160
T 41295	27	43.15	160	160
T 41296	28	44.77	160	160

Obj. číslo	zubov	Ø De	L	L1
T 41297	29	46.39	160	160
T 41298	30	48.00	160	160
T 41299	32	51.24	160	160
T 41300	33	52.85	160	160
T 41301	34	54.47	160	160
T 41302	35	56.09	160	160
T 41303	36	57.70	160	160
T 41304	38	60.94	160	160
T 41305	39	62.56	160	160
T 41306	40	64.17	160	160
T 41307	41	65.79	160	160
T 41308	42	67.41	160	160
T 41309	43	69.02	160	160
T 41310	44	70.64	160	160
T 41311	48	77.11	160	160
T 41312	56	90.04	160	160
T 41313	60	96.51	160	160
T 41314	72	115.92	160	160

## Rozteč L 3/8" (9.525 mm)

Oce Obj. číslo	Hliník Obj. číslo	zubov	Ø De	L	L1
T 41315	T 41332	10	29.56	140	140
T 41316	T 41333	11	32.59	140	140
T 41317	T 41334	12	35.62	160	160
T 41318	T 41335	13	38.65	160	160
T 41319	T 41336	14	41.68	160	160
T 41320	T 41337	15	44.72	160	160
T 41321	T 41338	16	47.75	160	160
T 41322	T 41339	17	50.78	160	160
T 41323	T 41341	18	53.81	160	160

Oce Obj. číslo	Hliník Obj. číslo	zubov	Ø De	L	L1
T 41324	T 41342	19	56.84	160	160
T 41325	T 41343	20	59.88	160	160
T 41326	T 41344	21	62.91	160	160
T 41327	T 41345	22	65.94	160	160
T 41328	T 41346	23	68.97	160	160
T 41329	T 41347	24	72.00	160	160
T 41330	T 41348	27	81.10	160	160
T 41331	T 41349	30	90.20	160	160

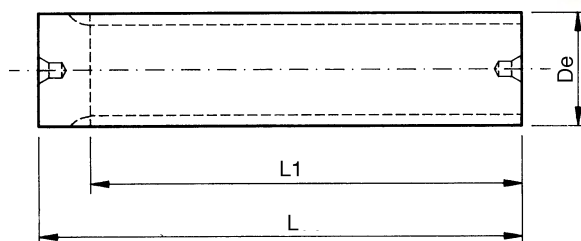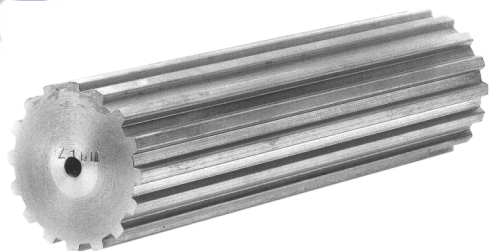

### Rozteč AT 5

Obj. číslo	zubov	Ø De	L	L1
T 76188	12	17.85	140	140
T 76189	13	19.45	140	140
T 76190	14	21.05	140	140
T 76192	15	22.65	140	140
T 76193	16	24.20	140	140
T 76194	17	25.80	140	140
T 76195	18	27.40	140	140
T 76196	19	29.00	140	140
T 76197	20	30.60	160	160
T 76198	21	32.30	160	160
T 76199	22	33.85	160	160
T 76200	23	35.45	160	160
T 76201	24	37.00	160	160
T 76202	25	38.55	160	160
T 76203	26	40.20	160	160
T 76204	27	41.80	160	160
T 76205	28	43.35	160	160

Obj. číslo	zubov	Ø De	L	L1
T 76206	30	46.55	160	160
T 76207	32	79.70	160	160
T 76208	34	52.85	160	160
T 76209	36	56.05	160	160
T 76210	38	59.25	160	160
T 76211	40	62.45	160	160
T 76212	42	65.60	160	160
T 76213	44	68.80	160	160
T 76214	46	72.00	160	160
T 76215	48	75.15	160	160
T 76216	52	81.55	160	160
T 76217	56	87.90	160	160
T 76218	58	91.10	160	160
T 76219	60	94.25	160	160
T 76220	64	100.65	160	160
T 76221	72	113.35	160	160

### Rozteč AT 10



T 76222	15	45.90	160	160
T 76223	16	49.10	160	160
T 76224	17	52.25	160	160
T 76225	18	55.45	160	160
T 76226	19	58.65	160	160
T 76227	20	61.80	160	160
T 76228	21	65.00	160	160
T 76229	22	68.20	160	160
T 76230	23	71.35	160	160
T 76231	24	74.55	160	160
T 76232	25	77.75	160	160
T 76233	26	80.90	160	160
T 76234	27	84.05	160	160
T 76235	28	87.25	160	160
T 76236	30	93.65	160	160

T 76237	32	100.00	160	160
T 76238	34	106.40	160	160
T 76239	36	112.75	160	160
T 76240	38	119.10	160	160
T 76241	40	125.45	160	160
T 76242	42	131.85	160	160
T 76243	44	138.20	160	160
T 76244	46	144.55	160	160
T 76245	48	150.95	160	160
T 76246	52	163.65	160	160
T 76247	56	176.40	160	160
T 76248	58	182.75	160	160
T 76249	60	189.15	160	160
T 76250	70	220.95	160	160



# Ozubené hriadele

vi .nižšie

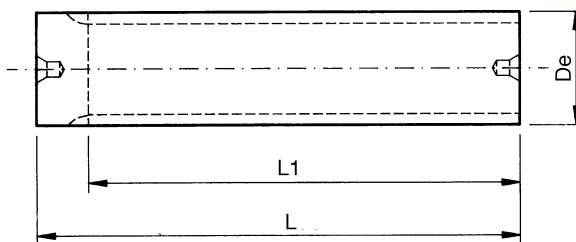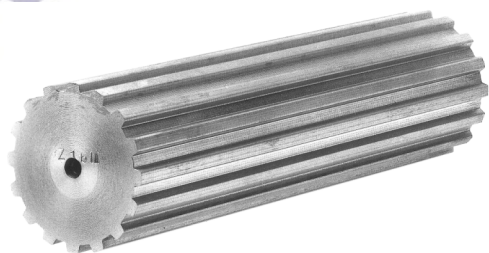

## Rozteč HTD 5M - materiál: hliník

## Rozteč HTD 8M - materiál: ocel

Obj. číslo	zubov	Ø De	L	L1
U 00014	12	17.96	160	160
U 00015	13	19.55	160	160
U 00016	14	21.14	200	175
U 00017	15	22.73	200	175
U 00018	16	24.32	200	175
U 00019	17	25.92	200	175
U 00020	18	27.51	200	200
U 00021	19	29.10	200	200
U 00022	20	30.69	200	200
U 00023	21	32.28	200	200
U 00024	22	33.87	200	200
U 00025	23	35.47	200	200
U 00026	24	37.06	200	200
U 00027	25	38.65	200	200
U 00028	26	40.24	200	200
U 00029	27	41.83	200	200
U 00030	28	43.42	200	200
U 00031	30	46.61	200	200
U 00032	32	49.79	200	200
U 00033	34	52.97	200	200
U 00034	36	56.16	200	200
U 00035	38	59.34	200	200
U 00036	40	62.52	200	200
U 00037	42	65.71	200	200
U 00038	44	68.89	200	200
U 00039	45	70.48	200	200
U 00040	48	75.25	200	200
U 00041	50	78.44	200	200
U 00042	60	94.35	200	200
U 00043	72	113.45	200	200

Obj. číslo	zubov	Ø De	L	L1
U 00044	18	44.47	200	200
U 00045	19	47.01	200	200
U 00046	20	49.56	200	200
U 00047	21	52.11	200	200
U 00048	22	54.65	200	200
U 00049	23	57.20	200	200
U 00050	24	59.75	200	200
U 00051	25	62.29	200	200
U 00052	26	64.84	200	200
U 00053	28	69.93	200	200
U 00054	30	75.02	200	200
U 00055	32	80.12	200	200
U 00056	34	85.21	200	200
U 00057	35	87.76	200	200
U 00058	36	90.30	200	200
U 00059	38	95.40	200	200
U 00060	40	100.49	200	200
U 00061	44	110.68	200	200

# Bo nice pre ozubené remenice


Tabu ka pre výber bo níc :

Počet zubů	Označenie bočnice												
	XL s = 1.0	L s = 1.5	H s = 1.5	XH s = 2.5	3M s = 0.5	5M s = 1.0	8M s = 1.5	14M s = 2.5	T 2.5 s = 0.5	T 5 s = 1.0	T 10 s = 1.0	AT 5 s = 1.0	AT 10 s = 1.0
10	201	300			100					200			
11	201	301											
12	203	302			101	202			100	201	208	201	208
13	203	303											
14	204	304	309		102	203			101	203	210	203	210
15	204	305	310		104	204			101	204	211	204	211
16	205	306	311		104	204			102	205	212	205	212
17	205	307	312										
18	206	308	313	401	105	205			104	205	214	205	214
19	206	309	314	402					104	206	216	206	216
20	207	310	315	403	107	206			105	206	216	206	216
21	207	311	316	404	108	207							
22	208	312	317	405	108	207	308		106	207	218	207	218
23		313	318										
24	209	313	320	406	108	208	310		107	208	219	208	219
25		314	321	407					107	209	219	209	219
26	210	315	322	409	109	209	311		108	209	220	209	220
27	210	315	323	410						210	221	210	221
28	211	316	325	411	110	210	312	400	108	210	222	210	222
29			326										
30	212	318	327	412	110	211	314	401	109	211	223	211	223
32	213	320	328	414	111	212	315	403	110	212	224	212	224
33		321	330										
34	214	322	331	415		213	316	404					
35	215	322	333										
36		323	334		112	214	319	405	111	215	225	215	225
38			335			216	320	406					
40		327	338		113	217	321	407	112	216	226	216	226
42		328								217		217	
44		330	339		114	218	325	411					
45		331	340										
48		334	342			219	327	412					
52													
56						222	333	416					
60													
64						224	338	418					
68													
72						225	340						
80													
90													

# Bočnice

pre ozubené remenice

Pozinkovaná oce

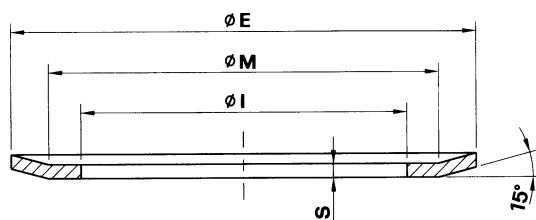

## Hrúbka bočnice $s = 0.5$ mm

Obj. číslo	Označenie bočnice	$\varnothing E$	$\varnothing M$	$\varnothing I$
T 41428	100	12.0	10.0	6.0
T 41429	101	15.0	12.0	8.0
T 41430	102	16.0	13.0	9.5
T 41431	104	17.5	15.0	11.0
T 41432	105	19.5	17.5	12.0
T 41433	106	23.0	17.5	12.0
T 41444	107	23.0	20.0	14.0
T 41445	108	25.0	22.0	15.0
T 41435	109	28.0	24.0	18.0
T 41436	110	32.0	28.0	21.5
T 41437	111	36.0	31.0	25.0
T 41438	112	38.0	34.0	28.0
T 41440	113	42.0	38.0	30.5
T 41447	114	48.0	43.5	37.0


## Hrúbka bočnice $s = 1.0$ mm

Obj. číslo	Označenie bočnice	$\varnothing E$	$\varnothing M$	$\varnothing I$
T 41450	200	19.5	17.5	12.0
T 41448	201	23.0	17.5	12.0
T 41461	202	23.0	20.0	14.0
T 41449	203	25.0	22.0	15.0
T 41451	204	28.0	24.0	18.0
T 41453	205	32.0	28.0	21.5
T 41455	206	36.0	31.0	25.0
T 41456	207	38.0	34.0	28.0
T 41460	208	42.0	38.0	30.5
T 41459	209	44.0	40.0	33.0
T 41458	210	48.0	43.5	37.0
T 41463	211	51.0	47.5	40.0
T 41464	212	54.0	50.5	43.0
T 41465	213	57.0	53.0	46.0
T 41466	214	60.0	57.0	47.0
T 41468	215	63.0	57.0	48.0
T 41469	216	66.0	61.5	52.0
T 41470	217	71.0	65.0	56.0
T 41473	218	75.0	68.5	60.0
T 41475	219	83.0	76.5	68.0
T 41476	220	87.0	82.5	72.0
T 41477	221	91.0	85.5	76.0
T 41478	222	93.0	89.0	80.0
T 41479	223	97.0	93.0	83.0
T 41480	224	106.0	101.0	90.0
T 41481	225	119.0	113.5	103.0
T 41482	226	131.0	125.5	115.0

# Bočnice

pre ozubené remenice

Pozinkovaná oce

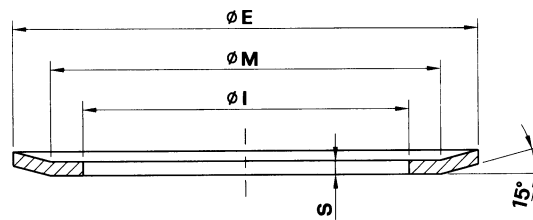

## Hrúbka bočnice s = 1.5 mm



Obj. číslo	Označenie bočnice	Ø E	Ø M	Ø I
T 41351	300	36.0	31.0	25.0
T 41352	301	38.0	34.0	28.0
T 41354	302	42.0	38.0	30.5
T 41393	303	44.0	40.0	33.0
T 41357	304	48.0	43.5	37.0
T 41358	305	51.0	47.5	40.0
T 41359	306	54.0	50.5	43.0
T 41360	307	57.0	53.0	46.0
T 41355	308	60.0	57.0	47.0
T 41362	309	63.0	57.0	48.0
T 41377	310	66.0	61.5	52.0
T 41364	311	71.0	65.0	56.0
T 41390	312	75.0	68.5	60.0
T 41366	313	79.0	73.5	64.0
T 41383	314	83.0	76.5	68.0
T 41387	315	87.0	82.5	72.0
T 41370	316	91.0	85.5	76.0
T 41373	317	93.0	89.0	80.0
T 41375	318	97.0	93.0	83.0
T 41380	319	98.0	92.0	79.3
T 41378	320	103.0	97.0	86.0
T 41388	321	106.0	101.0	90.0
T 41382	322	111.0	106.0	94.0
T 41385	323	115.0	110.0	99.0
T 41386	325	119.0	113.5	103.0
T 41369	326	123.0	117.5	107.0
T 41389	327	127.0	122.0	111.0
T 41391	328	135.0	130.0	119.0
T 41392	330	140.0	134.5	123.0
T 41397	331	143.0	139.0	127.0
T 41394	333	148.0	143.0	132.0
T 41399	334	152.0	147.5	136.0
T 41395	335	158.0	154.0	142.0
T 41396	338	168.0	163.0	149.5
T 41398	339	184.0	179.0	165.0
T 41400	340	192.0	187.0	173.0
T 41401	342	200.0	195.0	181.0

## Hrúbka bočnice s = 2.5 mm

Obj. číslo	Označenie bočnice	Ø E	Ø M	Ø I
T 41402	400	127.0	120.2	104.7
T 41403	401	138.0	130.0	108.0
T 41405	402	146.0	138.0	116.0
T 41409	403	154.0	146.0	122.0
T 41415	404	160.0	150.0	128.0
T 41417	405	168.0	162.0	135.0
T 41420	406	183.0	170.0	145.0
T 41411	407	188.0	180.0	158.0
T 41412	409	198.0	188.0	165.0
T 41413	410	200.0	192.8	172.0
T 41422	411	211.0	198.0	173.0
T 41425	412	226.0	214.0	190.0
T 41418	414	240.0	224.0	192.0
T 41419	415	256.0	240.0	220.0
T 41426	416	256.0	247.0	225.0
T 41427	418	296.0	287.0	252.0



# Upínacie dosťičky pre ozubené remene

Hliník

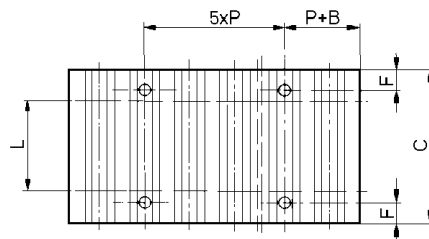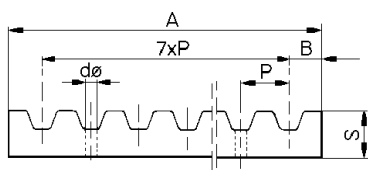

## T 5 a T 10



Obj. číslo	Typ L/P	Rozteč P	A	C	dØ	B	F	S
T 32737	10 T 5	5	41.8	29	5.5	3.2	6	8
T 32738	16 T 5	5	41.8	35	5.5	3.2	6	8
T 32740	25 T 5	5	41.8	44	5.5	3.2	6	8
T 32741	16 T 10	10	80.0	41	9.0	5.0	8	15
T 32742	25 T 10	10	80.0	50	9.0	5.0	8	15
T 32743	32 T 10	10	80.0	57	9.0	5.0	8	15
T 32744	50 T 10	10	80.0	75	9.0	5.0	8	15

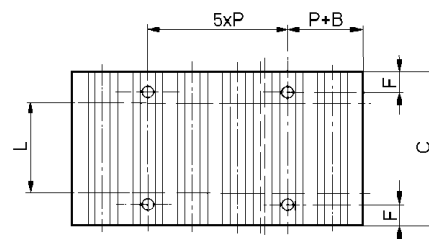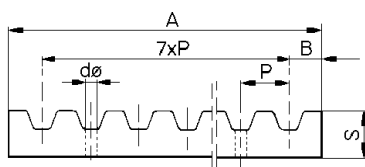

## AT 5 a AT 10



T 76691	10 AT 5	5	41.8	29.0	5.5	3.2	6.0	8
T 76335	16 AT 5	5	41.8	35.0	5.5	3.2	6.0	8
T 76693	25 AT 5	5	41.8	44.0	5.5	3.2	6.0	8
T 76694	16 AT10	10	80.0	41.0	9.0	5.0	8.0	15
T 76695	25 AT10	10	80.0	50.0	9.0	5.0	8.0	15
T 76696	32 AT10	10	80.0	57.0	9.0	5.0	8.0	15
T 76697	50 AT10	10	80.0	75.0	9.0	5.0	8.0	15



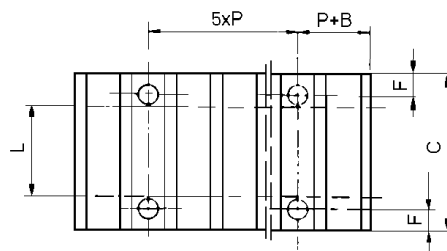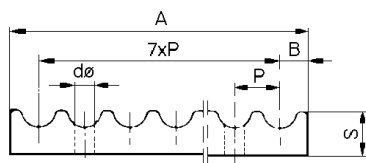

### HTD 5M, 8M a 14M

Obj. číslo	Typ L/P	Rozteč P	A	C	dØ	B	F	S
T 77487	10 5M	5	41.8	28	5.5	3.4	6	8
T 77488	15 5M	5	41.8	34	5.5	3.4	6	8
T 77421	25 5M	5	41.8	44	5.5	3.4	6	8
T 32722	20 8M	8	66.0	45	9.0	5.0	8	15
T 32723	30 8M	8	66.0	55	9.0	5.0	8	15
T 32724	50 8M	8	66.0	75	9.0	5.0	8	15
T 32725	85 8M	8	66.0	110	9.0	5.0	8	15
T 32745	40 14M	14	116.0	71	11.0	9.0	10	22
T 32747	55 14M	14	116.0	86	11.0	9.0	10	22
T 32748	85 14M	14	116.0	116	11.0	9.0	10	22
T 32749	115 14M	14	116.0	146	11.0	9.0	10	22
T 76698	170 14M	14	116.0	201	11.0	9.0	10	22

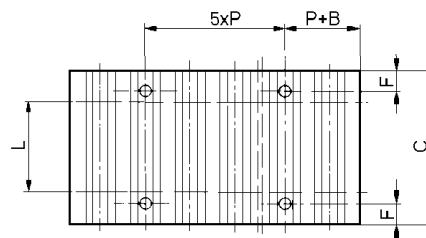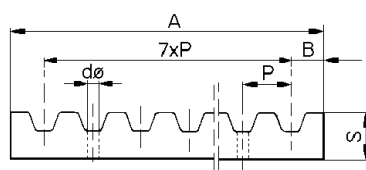

### XL, L a H

T 32728	025 XL	5.08	42.5	25.5	5.5	3.5	6	8
T 32729	037 XL	5.08	42.5	28.5	5.5	3.5	6	8
T 32731	050 L	9.525	76.6	39.0	9.0	5.0	8	15
T 32732	075 L	9.525	76.5	45.0	9.0	5.0	8	15
T 32733	100 L	9.525	76.5	51.5	9.0	5.0	8	15
T 76699	050 H	12.7	106.9	45.0	11.0	9.0	10	22
T 32734	075 H	12.7	106.9	51.0	11.0	9.0	10	22
T 32736	100 H	12.7	106.9	57.5	11.0	9.0	10	22